

SOLRIG Panel 96"(25"x4)W×78.58"H+Track Kit K Style

SOLRIG Sliding Closet Door K Style Instruction Manual

Model: Panel 96"(25"x4)W×78.58"H+Track Kit K Style

Brand: SOLRIG

1. INTRODUCTION

This manual provides detailed instructions for the assembly, installation, operation, and maintenance of your SOLRIG K Style Sliding Closet Door. This door system is designed for standard 96"x80" openings and features a classic K-style design with durable MDF panels and a white PVC surface. Please read all instructions carefully before beginning installation to ensure safe and proper setup.



Image 1.1: Installed SOLRIG K Style Sliding Closet Doors.

2. SAFETY INFORMATION

- Always read and understand all instructions before installation.
- Use appropriate safety gear, including gloves and eye protection, during installation.
- This product requires two people for safe lifting and installation of door panels.
- Inspect all components for damage before assembly. Do not install damaged parts.
- Keep small parts and hardware away from children to prevent choking hazards.
- Ensure the installation surface (door frame header) is structurally sound and capable of supporting the weight of the doors and hardware.

3. PACKAGE CONTENTS

Verify that all components listed below are present in your package. If any parts are missing or damaged, please contact customer support.

- Sliding Door Panels (4 panels, each 25"W × 78.58"H)

- Sliding Tracks (Two sections)
- Handles (Recessed finger pulls)
- Pulleys / Rollers
- Fascia (Track cover)
- Floor Guide
- Assembly Hardware (Screws, anchors, etc.)
- Instruction Manual (This document)



Sliding Closet Door Bottom Floor Guide

Ensure that your sliding doors panel remain aligned and operate smoothly for enhanced stability and security

Image 3.1: Sliding Closet Door Roller Kit.



Sliding Closet Door Finger Pull

It provides a secure and comfortable grip, making it easier to open and close the door smoothly

Image 3.2: Sliding Closet Door Finger Pull Handles.

SLIDING CLOSET DOOR ROLLER KIT

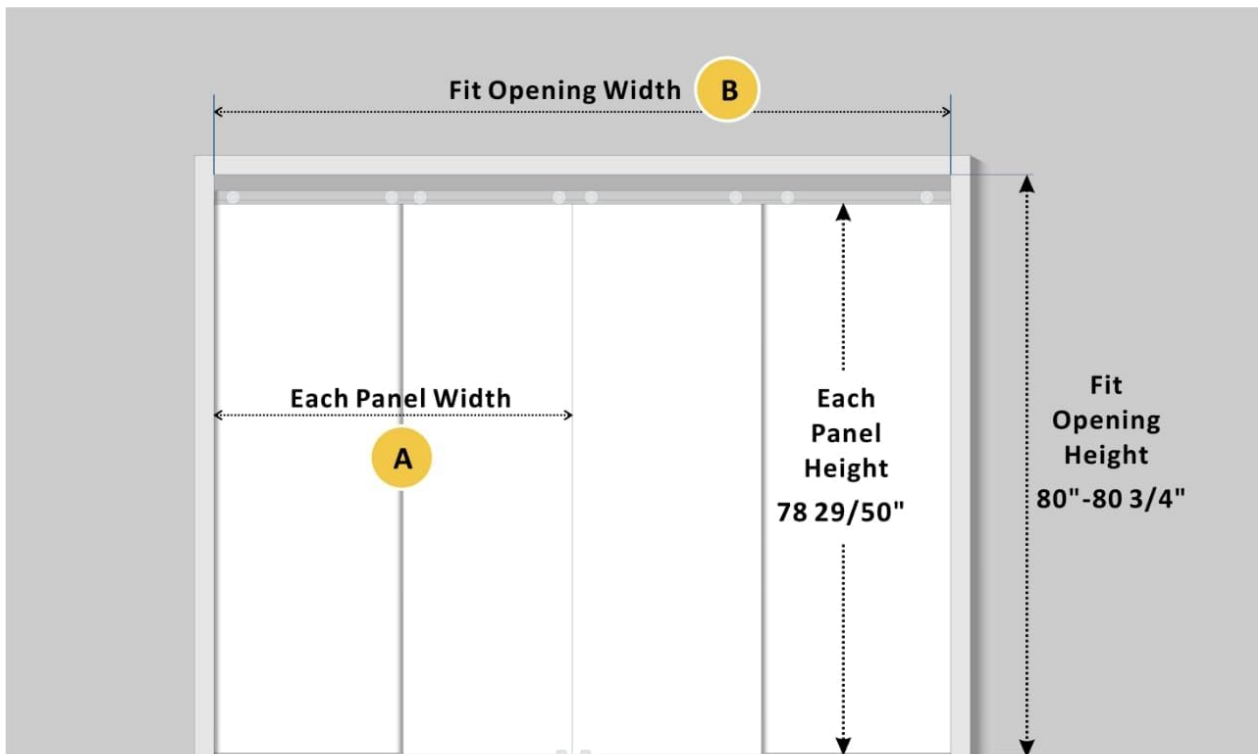


Image 3.3: Sliding Closet Door Bottom Floor Guide.

4. SPECIFICATIONS

Feature	Detail
Manufacturer	SOLRIG
Model	Panel 96"(25"x4)W×78.58"H+Track Kit K Style
Fit Opening Dimensions	96" (Width) × 80" (Height)
Each Panel Dimensions	25" (Width) × 78.58" (Height)
Style	Classic K Style
Material	MDF with White PVC Surface
Item Package Quantity	1

Standard Sliding Glass Door Dimensions



	A		B	
Size Choice	Each Panel Width	Each Panel Height	Fit Opening Width	Fit Opening Height
96" (48" x 2) x 80"	25" x 2	78 29/50"	90" (48" x 2)	80" - 80 3/4"
120" (60" x 2) x 80"	30 49/50" x 2	78 29/50"	120" (60" x 2)	80" - 80 3/4"
144" (72" x 2) x 80"	36 49/50" x 2	78 29/50"	144" (72" x 2)	80" - 80 3/4"

Note: Please measure the rough opening of your door accurately before purchasing to ensure a proper fit.

Image 4.1: Standard Sliding Closet Door Dimensions.

5. SETUP AND INSTALLATION

5.1 Pre-Installation Checklist

- **Tools Required:** Tape measure, pencil, level, drill, screwdriver, stud finder (recommended).
- **Clear Workspace:** Ensure the installation area is clear of obstructions.
- **Verify Opening:** Confirm your door opening dimensions are approximately 96" wide by 80" high.
- **Inspect Components:** Check all door panels and hardware for any defects.

5.2 Installation Steps

- 1. Measure and Mark:** Measure the width of your door opening. Mark the center point of the opening on the header. Position the top track and mark the drilling locations for mounting screws. Ensure the track is level.
- 2. Install Top Track:** Drill pilot holes at the marked locations. Securely attach the two sections of the top track to the header using the provided screws and anchors. Ensure the track is firmly mounted and aligned.
- 3. Assemble Door Panels:** Attach the roller assemblies to the top edge of each door panel. The panels are pre-drilled for easy attachment. Install the recessed finger pull handles into the designated holes on the door panels.

4. **Hang Door Panels:** With assistance, carefully lift each door panel and engage the rollers into the top track. Ensure all four panels are correctly seated in the track.
5. **Install Floor Guide:** Position the bottom floor guide centrally beneath the door panels. Mark the drilling locations. Drill pilot holes and secure the floor guide to the floor using the provided screws. This guide helps keep the doors aligned.
6. **Adjust and Test:** Gently slide the doors back and forth to ensure smooth operation. Adjust the rollers or floor guide as needed to achieve proper alignment and movement.

6. OPERATING INSTRUCTIONS

Your SOLRIG K Style Sliding Closet Door is designed for smooth and quiet operation. To open or close the doors, gently grasp the recessed finger pull handle and slide the door along its track. Avoid forcing the doors, as this can cause misalignment or damage to the rollers and track.

- **Opening:** Slide the door panels to the left or right to reveal the closet opening.
- **Closing:** Slide the door panels back into their closed position, ensuring they meet evenly.
- **Smooth Movement:** If doors feel stiff, check the track for obstructions or debris.

7. MAINTENANCE

Regular maintenance will ensure the longevity and smooth operation of your sliding closet doors.

- **Cleaning the Panels:** The white PVC surface is easy to clean. Use a soft, damp cloth with mild soap and water to wipe down the door panels. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- **Track Cleaning:** Periodically vacuum or wipe the top and bottom tracks to remove dust, dirt, and debris that can impede smooth sliding.
- **Hardware Check:** Every few months, check all screws and fasteners on the rollers, handles, and tracks to ensure they are tight. Tighten any loose hardware.
- **Lubrication:** If the doors become noisy or difficult to slide, a silicone-based lubricant can be applied sparingly to the top track and roller mechanisms. Do not use oil-based lubricants, as they can attract dirt.

8. TROUBLESHOOTING

Refer to the following table for common issues and their solutions.

Problem	Possible Cause	Solution
Doors are difficult to slide or stick.	Debris in track, rollers need lubrication, track misalignment.	Clean tracks, apply silicone lubricant to rollers/track, check track for levelness and adjust if necessary.
Doors are noisy during operation.	Dry rollers, loose hardware.	Lubricate rollers, tighten all hardware.
Doors are not aligned or do not close evenly.	Improperly installed floor guide, uneven track, loose rollers.	Adjust the position of the floor guide, ensure top track is level, check roller attachment.

Door panels appear damaged upon arrival.

Shipping damage.

Do not install. Contact customer support immediately for a replacement.

9. WARRANTY INFORMATION

For specific warranty details regarding your SOLRIG Sliding Closet Door, please refer to the product packaging or contact SOLRIG customer support directly. We are committed to your satisfaction and will assist with any product-related concerns.

10. CUSTOMER SUPPORT

If you have any questions, require assistance with installation, or encounter any issues with your SOLRIG Sliding Closet Door, our friendly support team is ready to assist you. Please reach out to us right away for prompt resolution and to ensure a positive experience.

You can typically find contact information for the seller through your purchase platform or by visiting the official SOLRIG brand store online.

High Quality and Strong MDF Material



Scratch Resistant



Smooth Surface



Easy to Clean



P2 CARB



Image 10.1: How to contact customer support.

© 2025 SOLRIG. All rights reserved.