**VOTON V-1538I**

# VOTON Matte Black Bathroom Sink Faucet (Model V-1538I) Instruction Manual

## Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your VOTON Matte Black Bathroom Sink Faucet, Model V-1538I. Please read all instructions carefully before installation and use to ensure proper function and longevity of the product.

## Safety Information

- Always turn off the main water supply before beginning any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses and gloves, during installation.
- Ensure all connections are secure to prevent leaks. Do not overtighten.
- If you are unsure about any part of the installation process, consult a qualified plumber.

## Package Contents

Verify that all components are present before beginning installation:

- Bathroom Sink Faucet
- Deck Plate (for 3-hole installations)
- Pop-up Drain Assembly
- Mounting Hardware
- 3/8 threaded 24-inch Supply Hoses

## Product Overview

The VOTON Matte Black Bathroom Sink Faucet features a single-handle design for easy water and temperature control. It is constructed from SUS 304 stainless steel for durability and rust resistance, and

includes an ABS superior aerator for soft, splash-free water flow.




Figure 1: Faucet and Drain Dimensions. The faucet measures approximately 6.41 inches in height with a spout reach of 4.44 inches. The deck plate is 6.29 inches wide. The pop-up drain is 8.26 inches long.

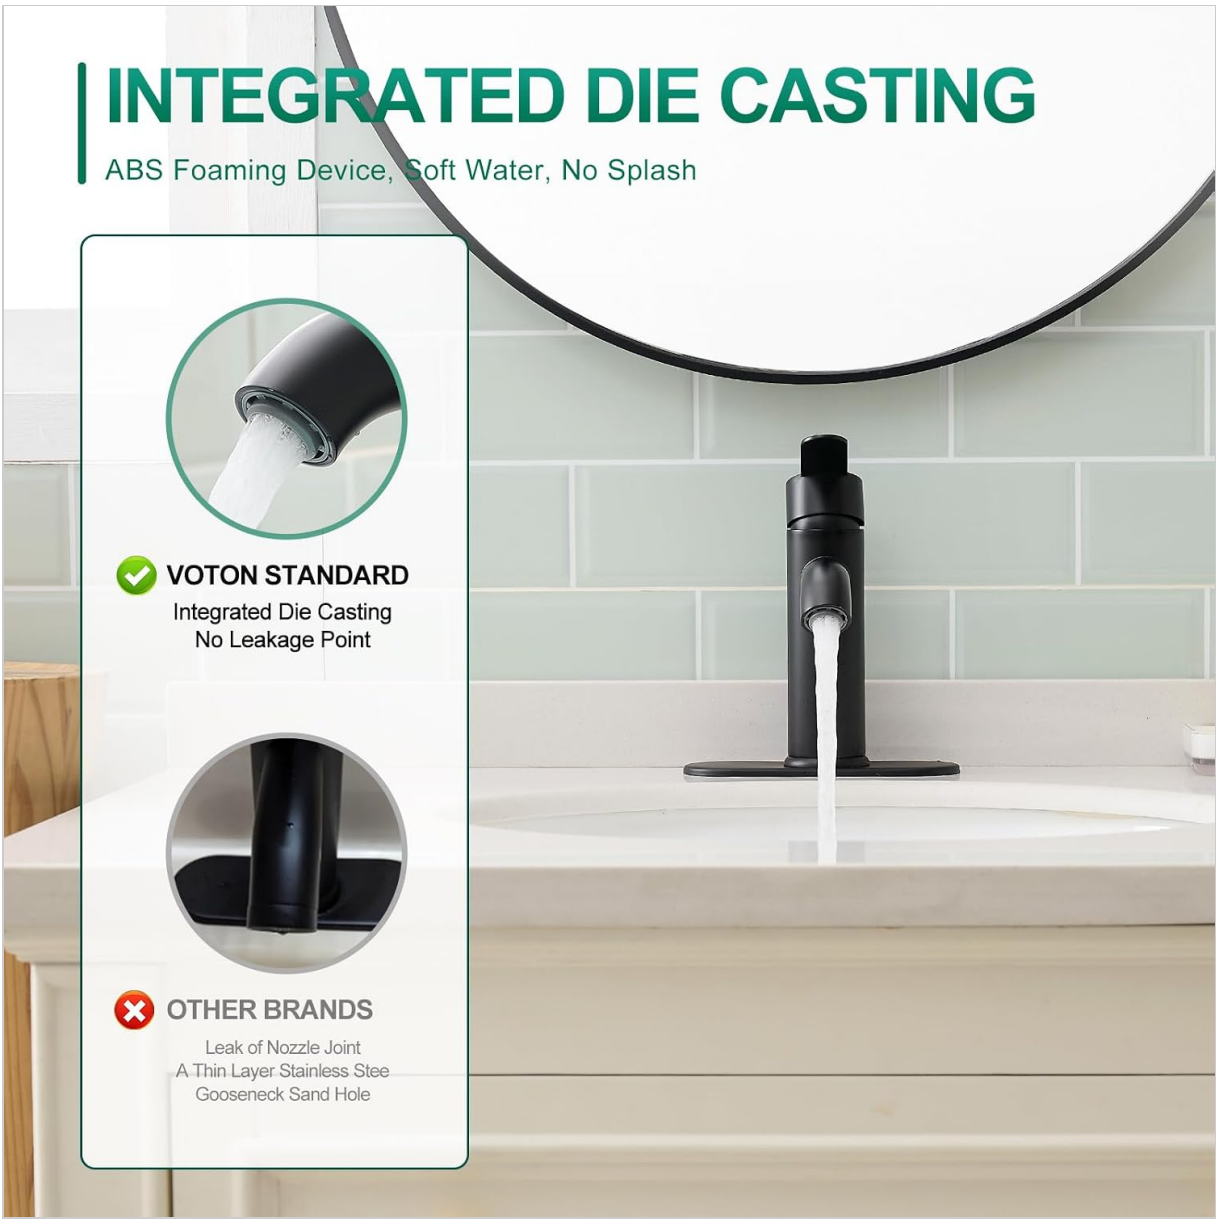



Figure 2: Integrated Die Casting. This image illustrates the internal construction of the VOTON faucet, highlighting its integrated die-casting design for leak prevention.

## Installation

This faucet is designed for 1-hole or 3-hole sink installations. The included deck plate covers unused holes for a clean finish.

### Step-by-Step Installation:

1. **Prepare the Sink:** Ensure the sink surface is clean and dry. If installing on a 3-hole sink, place the deck plate over the holes.
2. **Install the Faucet:** Insert the faucet body through the center hole (and deck plate if used). Secure it from underneath the sink using the provided mounting hardware. Ensure the faucet is oriented correctly.
3. **Connect Water Supply Lines:** Attach the hot and cold water supply hoses to the corresponding inlets on the faucet body. Connect the other ends of the hoses to your hot and cold water supply valves. Hand-tighten first, then use a wrench for a quarter turn to ensure a snug, leak-free connection.
4. **Install Pop-up Drain:** Assemble the pop-up drain according to its specific instructions. Insert the drain body into the sink drain hole. Secure it from underneath the sink, ensuring a watertight seal with

plumber's putty or silicone sealant if necessary.

5. **Test for Leaks:** Once all connections are made, slowly turn on the main water supply. Check all connections for any signs of leaks. If leaks occur, tighten the connections slightly.




Figure 3: Pop-up Drain Assembly. The included pop-up drain features an anti-clogging strainer and is suitable for sinks with an overflow outlet.




Figure 4: Stainless Steel Material and Sink Compatibility. The faucet body is made of stainless steel and can be installed on both one-hole and three-hole bathroom sinks.

## Operation

The VOTON faucet features a single lever handle for controlling water flow and temperature.

- **Water Flow:** Lift the handle to increase water flow. Push down to decrease or stop flow.
- **Temperature Control:** Move the handle to the left for hot water and to the right for cold water.




Figure 5: ABS Superior Aerator. The aerator ensures a soft, consistent water stream without splashing.

## Maintenance

Regular cleaning and maintenance will help preserve the finish and functionality of your faucet.

- **Cleaning the Finish:** Clean the matte black finish with a soft, damp cloth. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish. The finish is designed to resist fingerprints and water spots.
- **Aerator Cleaning:** Periodically unscrew the aerator from the spout and rinse it to remove any mineral deposits or debris. This helps maintain optimal water flow.
- **Ceramic Cartridge:** The faucet is equipped with a durable ceramic cartridge, tested for 500,000 cycles, ensuring long-term leak-free performance.




Figure 6: Patented Ceramic Cartridge. This image highlights the durable ceramic core designed for smooth control and leak-free operation.

## Troubleshooting

| Problem | Possible Cause | Solution |
|---|---|---|
| Low Water Flow | Clogged aerator or partially closed supply valves. | Clean the aerator. Ensure water supply valves are fully open. |
| Leaks from Faucet Base | Loose mounting nut or improper sealing. | Tighten the mounting nut underneath the sink. Reapply plumber's putty or silicone if necessary. |
| Leaks from Supply Hoses | Loose connections or damaged washers. | Ensure hose connections are tight. Check and replace washers if damaged. Do not overtighten. |
| Water Temperature Issues | Incorrect handle position or issues with water heater. | Adjust the handle to the desired hot/cold position. Check your water heater settings. |

## Specifications

- **Brand:** VOTON
- **Model Name:** bathroom faucet (V-1538I)
- **Finish Type:** Matte Black
- **Material:** SUS 304 Stainless Steel (faucet body), Metal (handle)
- **Mounting Type:** Deck Mount
- **Hole Count:** 1 (compatible with 3-hole sinks using deck plate)
- **Number of Handles:** 1
- **Spout Height:** 2.95 Inches
- **Spout Reach:** 4.4 Inches
- **Product Dimensions:** 4.44"D x 2"W x 6.41"H
- **Item Weight:** 2.44 pounds (1.11 Kilograms)
- **Special Features:** Easy to clean, Rust prevention
- **Included Components:** Bathroom Sink faucet, Deck Plate, Drain, Mounting Hardware

## Warranty and Support

VOTON is committed to providing quality products and customer satisfaction. For any installation guidance, missing parts, or general support, please contact our service team via email. We aim to provide professional solutions within 24 hours.

Please retain your purchase receipt for warranty purposes.