



Manuals.plus /

› TESSAN /

› TESSAN Power Strip Tower Surge Protector User Manual

TESSAN TS-1026TS

TESSAN Power Strip Tower Surge Protector User Manual

Model: TS-1026TS

Brand: TESSAN

INTRODUCTION

Thank you for choosing the TESSAN Power Strip Tower Surge Protector. This device is designed to provide a safe and efficient power solution for your home, office, or dorm room. Featuring multiple AC outlets and USB charging ports, along with robust surge protection, it ensures your electronic devices are powered and protected. Please read this manual carefully before use to ensure proper operation and safety.

SAFETY INFORMATION

To prevent fire, electric shock, or injury, always follow basic safety precautions when using this product:

- Do not exceed the maximum power rating of 125V.
- Do not use in wet environments or near water.
- Do not disassemble or modify the device.
- Keep out of reach of children.
- Ensure the plug is fully inserted into the wall outlet.
- Do not use with damaged cords or plugs.
- Avoid placing heavy objects on the power cord.
- This product is designed for indoor use only.

PRODUCT OVERVIEW

The TESSAN Power Strip Tower is a versatile charging station designed for convenience and safety.



Figure 1: TESSAN Power Strip Tower - Front View

This image displays the overall design of the TESSAN Power Strip Tower, highlighting its compact, vertical structure with multiple outlets and USB ports, and the flat plug extension cord.

11 IN 1 Power Strip Tower



Figure 2: 11-in-1 Power Strip Tower Features

This diagram illustrates the key features of the power strip, including the number and type of outlets and ports, surge protection rating, and the integrated phone holder.

Key Features:

- **8 AC Outlets:** Widely spaced to accommodate larger plugs without blocking adjacent outlets.
- **3 USB Ports:** Includes 2 USB-A ports (up to 2.4A/12W) and 1 USB-C port (up to 3A/15W) for direct device charging.
- **900 Joules Surge Protection:** Protects connected devices from power surges and spikes.
- **Vertical Tower Design:** Space-saving design allows for simultaneous use of all outlets without clutter.
- **5 FT Flat Plug Extension Cord:** Flexible cord with a low-profile flat plug for easy placement behind furniture.
- **Device Shelf:** Integrated shelf to conveniently hold phones or tablets while charging.
- **Overload Protection Switch:** Automatically cuts power in case of overload to prevent damage.

SETUP

Setting up your TESSAN Power Strip Tower is straightforward:

1. **Unpack:** Carefully remove the power strip from its packaging.
2. **Placement:** Choose a dry, stable location for the power strip, such as a desk, nightstand, or floor. Ensure it is away from direct sunlight, heat sources, and moisture. The four rubber feet on the base provide stability.
3. **Plug In:** Insert the flat plug of the power strip's 5-foot extension cord into a standard 125V wall outlet. The flat plug design allows it to fit snugly behind furniture.
4. **Cord Management:** Utilize the 2 cord clips at the bottom of the unit to route the extension cord neatly, adjusting it to the desired angle.



Figure 3: Flexible Design and Flat Plug

This image highlights the cord management features at the base of the unit and the low-profile flat plug, designed for convenience and space-saving.

Non-Blocking & Desktop Organized

Tower design saves more space

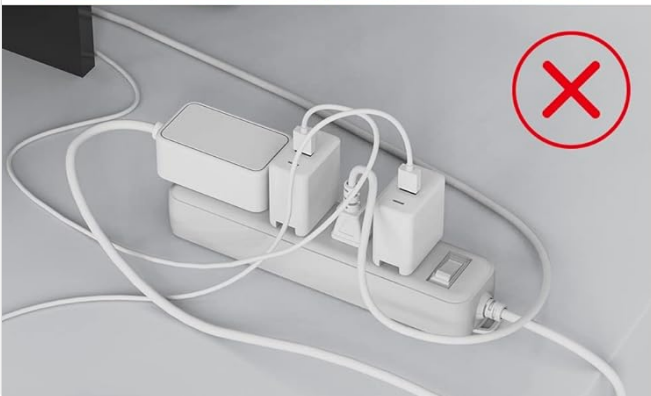


Figure 4: Non-Blocking Tower Design

This image illustrates how the vertical tower design allows multiple large power adapters to be plugged in simultaneously without blocking adjacent outlets, keeping your desktop organized.

OPERATING INSTRUCTIONS

Once the power strip is plugged in, you can begin connecting your devices:

- **AC Outlets:** Plug your electronic devices (laptops, monitors, lamps, etc.) directly into any of the 8 AC outlets. The widely spaced design ensures that even bulky power adapters can fit without obstructing other outlets.
- **USB Charging:** Connect your smartphones, tablets, smartwatches, or other USB-powered devices to the 2 USB-A ports or the 1 USB-C port. The intelligent charging technology will detect your device and deliver the optimal charging current.
- **Power Indicator:** A red "Protected" indicator light will illuminate when the surge protection is active and functioning correctly. If this light is off, the surge protection may have been compromised, and the unit should be replaced.
- **Overload Protection:** The power strip features an overload protection switch. In case of an electrical overload, the switch will trip, cutting power to all connected devices to prevent damage. To reset, unplug some devices, wait a moment, and then press the switch back in.

- **Device Shelf:** Use the integrated device shelf to prop up your smartphone or tablet while it charges, keeping your workspace tidy.



Figure 5: Surge Protection and Overload Switch

This image demonstrates the surge protection capability of the power strip, protecting connected appliances from electrical disturbances, and points out the location of the overload switch for safety.

MAINTENANCE

Proper maintenance ensures the longevity and safe operation of your power strip:

- **Cleaning:** Disconnect the power strip from the wall outlet before cleaning. Use a soft, dry cloth to wipe the exterior. Do not use liquid cleaners or abrasive chemicals.
- **Storage:** When not in use for extended periods, unplug the power strip and store it in a cool, dry place away from direct sunlight and extreme temperatures.
- **Inspection:** Periodically inspect the power cord and plug for any signs of damage, such as fraying, cuts, or bent prongs. If damage is found, discontinue use immediately and replace the unit.

TROUBLESHOOTING

If you encounter issues with your TESSAN Power Strip Tower, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No power to outlets/USB ports.	Power strip not plugged in. Wall outlet is not active. Overload protection tripped.	Ensure the power strip is securely plugged into a live wall outlet. Test the wall outlet with another device. Reduce the number of connected devices and press the overload reset switch.
USB ports not charging.	Device charging cable is faulty. Device is not compatible or requires higher power.	Try a different USB cable. Ensure your device is compatible with standard USB charging.
"Protected" indicator light is off.	Surge protection has been compromised.	The surge protection component has absorbed a significant surge and may no longer be active. The power strip will still function as a multi-outlet, but without surge protection. It is recommended to replace the unit for continued surge protection.

SPECIFICATIONS

Feature	Detail
Model Number	TS-1026TS
AC Outlets	8
USB-A Ports	2 (2.4A/12W max per port)
USB-C Port	1 (3A/15W max)
Surge Protection	900 Joules
Voltage	125V
Cord Length	5 Feet
Dimensions (L x W x H)	4.13 x 3.94 x 5.16 inches
Item Weight	1.02 pounds
Manufacturer	TESSAN
Country of Origin	China

WARRANTY AND SUPPORT

TESSAN products are designed and manufactured to the highest quality standards. For warranty information or technical support, please refer to the warranty card included with your purchase or visit the official TESSAN website. You can also contact TESSAN customer service directly for assistance.

TESSAN Official Website: www.tessan.com

For further assistance, please contact the seller directly through your purchase platform.