

Herfair 6-in-1 Docking Station

Herfair Steam Deck Dock 6-in-1 Docking Station User Manual

Model: 6-in-1 Docking Station

1. INTRODUCTION

This manual provides detailed instructions for the Herfair 6-in-1 Docking Station, designed for the Steam Deck, Steam Deck OLED, and ROG Ally. It covers product features, setup, operation, maintenance, troubleshooting, and specifications to ensure optimal performance and user experience.

2. PRODUCT FEATURES

- **6-in-1 Connectivity:** Integrates essential ports for enhanced gaming and productivity.
- **4K@60Hz HDMI 2.0 Output:** Supports high-resolution external displays for an immersive visual experience.
- **Gigabit Ethernet Port:** Provides stable and high-speed wired network connectivity.
- **100W USB-C Power Delivery:** Ensures fast and efficient charging for your device.
- **Three USB 3.0 Ports:** Offers 5Gbps data transfer speeds for connecting peripherals like keyboards, mice, and external storage.
- **Compact and Stable Design:** Features soft silicone pads for anti-slide and scratch-resistant placement.

6-in-1 Docking Station for Steam Deck

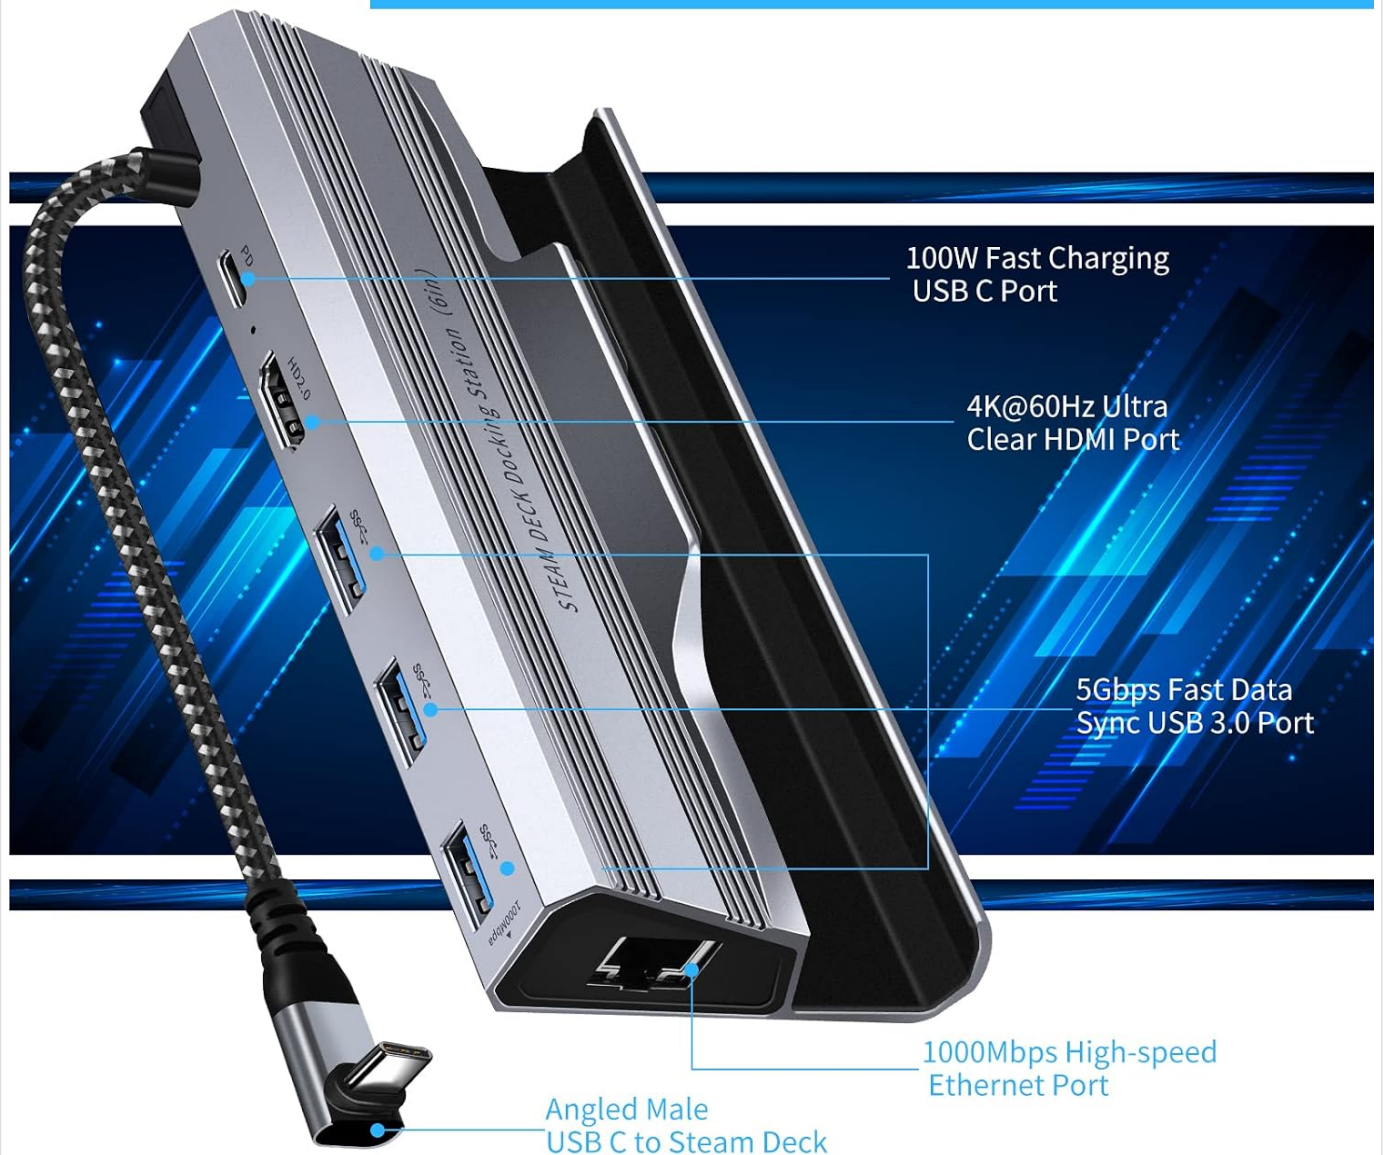


Figure 2.1: Overview of the Herfair 6-in-1 Docking Station ports and features.

3. PACKAGE CONTENTS

Please verify that all items are present and in good condition upon opening the package:

- Herfair 6-in-1 Docking Station
- User Manual (this document)
- Extra Silicone Bar (for enhanced stability)

4. SAFETY INFORMATION

To ensure safe operation and prevent damage to the device or injury, please read and adhere to the following safety guidelines:

- Do not expose the docking station to water, moisture, or extreme temperatures.
- Avoid dropping or subjecting the device to severe impacts.
- Use only compatible power adapters and cables.
- Do not attempt to disassemble or repair the device yourself. Contact customer support for assistance.
- Ensure proper ventilation around the docking station during use.
- If the thickness of your protective case for the Steam Deck or ROG Ally is greater than 2mm, it might not fit properly in this dock.

5. SETUP GUIDE

Follow these steps to set up your Herfair 6-in-1 Docking Station:

1. **Placement:** Place the docking station on a stable, flat surface. Ensure adequate space for cable connections and ventilation.
2. **Connect Power:** Connect a compatible USB-C power adapter (not included) to the 100W USB-C PD charging port on the docking station.
3. **Connect to Display (Optional):** For external display output, connect an HDMI cable (not included) from the HDMI 2.0 port on the docking station to your monitor, TV, or projector. Ensure your display supports 4K@60Hz for optimal performance.
4. **Connect to Network (Optional):** For a wired internet connection, connect an Ethernet cable (not included) from your router or modem to the Gigabit Ethernet port on the docking station.
5. **Connect Peripherals (Optional):** Connect USB devices such as keyboards, mice, or external storage to the three USB 3.0 ports.
6. **Dock Your Device:** Carefully align your Steam Deck, Steam Deck OLED, or ROG Ally with the angled USB-C connector on the docking station and gently insert it until it is securely seated.



Figure 5.1: Steam Deck connected to the docking station with various peripherals.

4K@60Hz Ultra Clear HDMI 2.0 Output



Figure 5.2: Steam Deck connected to an external display and peripherals via the docking station.

6. OPERATING INSTRUCTIONS

Once the docking station is set up, you can begin using its features:

- **Charging:** Your Steam Deck or ROG Ally will begin charging automatically when docked and the power adapter is connected to the PD port. The docking station supports up to 100W power delivery, ensuring efficient charging.
- **Video Output:** If an external display is connected via HDMI, your device's display will extend or mirror to the external screen. Adjust display settings on your Steam Deck or ROG Ally as needed for resolution and refresh rate. The dock supports 4K@60Hz.
- **Network Connectivity:** The Gigabit Ethernet port provides a stable and fast wired internet connection. This is ideal for large game downloads or online multiplayer gaming where low latency is crucial.

- **USB Peripherals:** Connected USB 3.0 devices will be recognized by your Steam Deck or ROG Ally. You can use external keyboards, mice, game controllers, or transfer data to/from USB storage devices at speeds up to 5Gbps.



Figure 6.1: Device charging via the 100W PD port.



Figure 6.2: High-speed Ethernet connection.



Figure 6.3: USB 3.0 ports in use for data transfer and peripherals.

7. MAINTENANCE

Proper maintenance ensures the longevity and performance of your docking station:

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the docking station. Do not use liquid cleaners or abrasive materials.
- **Port Care:** Keep all ports free of dust and debris. Avoid inserting foreign objects into the ports.
- **Storage:** When not in use for extended periods, store the docking station in a cool, dry place away from direct sunlight.
- **Silicone Pads:** Ensure the anti-slip silicone pads on the bottom and inside the dock are clean and intact to maintain stability and prevent scratches to your device. An extra silicone bar is provided for replacement or additional



Figure 7.1: Soft silicone features and extra silicone bar.

8. TROUBLESHOOTING

If you encounter issues with your Herfair 6-in-1 Docking Station, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No video output to external display.	Loose HDMI cable connection. Incorrect display settings on device. Incompatible HDMI cable (e.g., not 4K compatible). Device not fully seated in dock.	Ensure HDMI cable is securely connected at both ends. Check display settings on your Steam Deck/ROG Ally. Try a different HDMI cable, preferably one rated for 4K. Reseat your device in the dock.
Device not charging or charging slowly.	Power adapter not connected or insufficient wattage. Loose USB-C PD cable connection. Device not fully seated in dock.	Ensure a compatible USB-C PD power adapter (at least 45W for Steam Deck, 100W recommended for dock) is connected. Check USB-C PD cable connection. Reseat your device in the dock.
USB peripherals not recognized.	Loose USB connection. Device driver issues (rare). Power issue with high-power USB devices.	Ensure USB device is securely connected. Try connecting the USB device to a different port. Restart your Steam Deck/ROG Ally. Ensure the docking station is powered.
No internet connection via Ethernet.	Loose Ethernet cable. Router/modem issue. Network settings on device.	Check Ethernet cable connection to both dock and router. Restart your router/modem. Verify network settings on your Steam Deck/ROG Ally.

If the problem persists after trying these solutions, please contact Herfair customer support.

9. SPECIFICATIONS

Feature	Detail
Model Name	6-in-1 Docking Station
Brand	Herfair
ASIN	B0BL74JBX5
Dimensions (L x W x H)	5 x 7 x 1.7 inches
Weight	10.3 ounces (292 grams)

Feature	Detail
Color	Space Grey
HDMI Port	1x HDMI 2.0 (Supports 4K@60Hz)
Ethernet Port	1x Gigabit Ethernet (1000Mbps)
USB-C PD Charging Port	1x USB-C (Supports up to 100W Power Delivery)
USB Data Ports	3x USB 3.0 Type-A (Supports 5Gbps data transfer)
Total Ports	6
Compatible Devices	Steam Deck, Steam Deck OLED, ROG Ally, USB-C enabled devices (phones, iPads), Monitors, TVs, Projectors, USB peripherals (mouse, keyboard, speaker, camera)
Manufacturer	Herfair

10. WARRANTY AND SUPPORT

Herfair is committed to providing high-quality products and customer satisfaction.

- **Warranty:** This product comes with an 18-month warranty from the date of purchase.
- **Return Policy:** Enjoy 30 days of free returns.
- **Customer Service:** We provide a 180-day service for all our products. If you encounter any issues or are unsatisfied with your purchase, please do not hesitate to contact us. We aim to provide a satisfactory solution within 24 hours.

For support, please visit the official Herfair store or contact customer service through your purchase platform.

© 2023 Herfair. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question