

Manuals.plus /

› LINGQE /

› LINGQE GRWIBEOU VGA to HDMI Adapter (Model 000013) User Manual

LINGQE 000013

LINGQE GRWIBEOU VGA to HDMI Adapter (Model 000013) User Manual

Model: 000013

Brand: LINGQE

INTRODUCTION

This manual provides instructions for the proper setup, operation, and maintenance of your LINGQE GRWIBEOU VGA to HDMI Adapter. This device converts a VGA signal from a source device into both HDMI and VGA outputs, allowing simultaneous display on two different screens. It supports resolutions up to 1080P.



Image: The LINGQE GRWIBEOU VGA to HDMI Adapter, showing the main unit with VGA input, HDMI and VGA outputs,

and ports for 5V/1A power and audio. Also pictured are the included 3.5mm audio cable and USB power cable.

PACKAGE CONTENTS

- 1 x LINGQE GRWIBEOU VGA to HDMI/VGA Converter Adapter
- 1 x 3.5mm Audio Cable
- 1 x USB Power Cable
- 1 x User Manual (this document)

SETUP INSTRUCTIONS

1. **Connect the VGA Input:** Insert the VGA male connector of the adapter into the VGA output port of your source device (e.g., computer, laptop, desktop).
2. **Connect Power:** Plug the included USB power cable into the 5V/1A port on the adapter and connect the other end to a USB power source (e.g., computer USB port, USB wall adapter). *Note: USB power supply is required for proper operation.*
3. **Connect Audio (Optional):** If your source device has a 3.5mm audio output, connect the included 3.5mm audio cable from your source device's audio output to the audio input port on the adapter. This will embed audio into the HDMI signal.
4. **Connect Output Displays:**
 - **HDMI Output:** Connect an HDMI cable (not included) from the HDMI output port on the adapter to the HDMI input of your display device (e.g., HDTV, monitor, projector).
 - **VGA Output:** Connect a VGA cable (not included) from the VGA output port on the adapter to the VGA input of your second display device (e.g., monitor, projector).

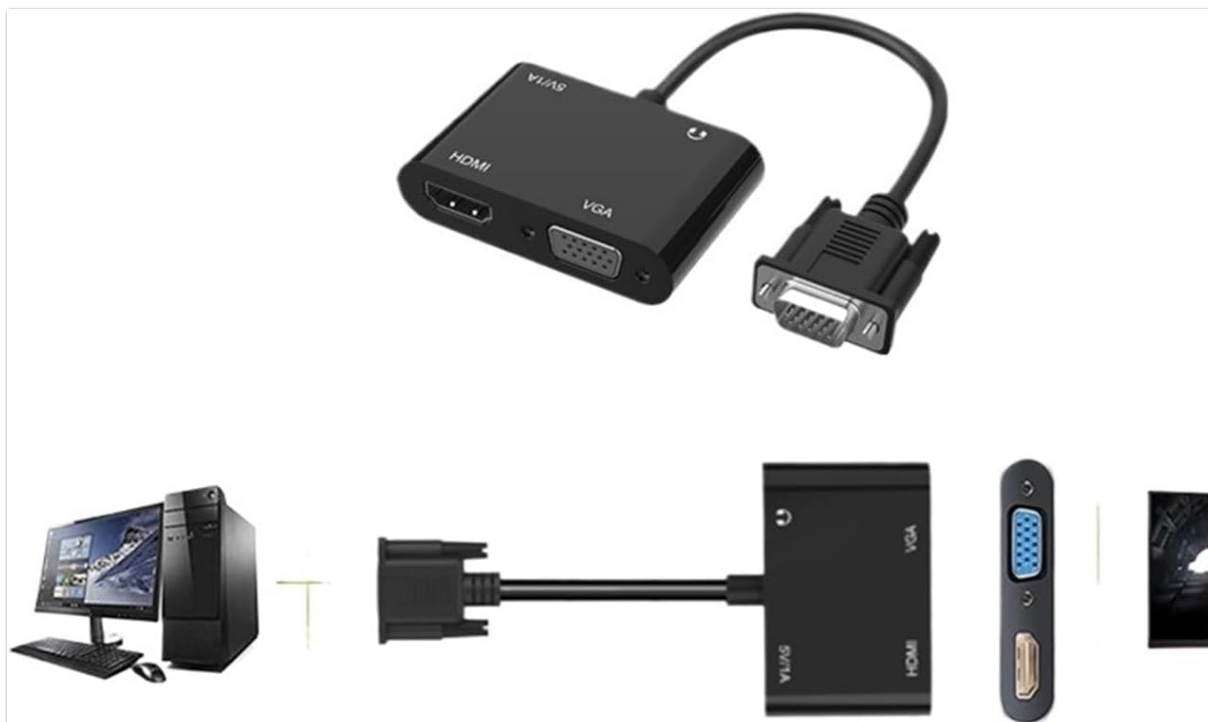


Image: A visual representation of the adapter's connectivity, illustrating how a computer's VGA output connects to the adapter, which then splits the signal to an HDMI display and a VGA display.



Image: A detailed view of the adapter's ports, including the VGA input, HDMI output, VGA output, 3.5mm audio input, and Micro USB 5V/1A power input.

OPERATING INSTRUCTIONS

Once all connections are made and the adapter is powered, the device operates on a plug-and-play basis. No additional drivers are required.

- **Automatic Resolution Sensing:** The adapter automatically senses the resolution of the connected display screens and adjusts the output ratio accordingly, based on the computer's output.
- **Simultaneous Display:** The adapter allows for simultaneous display of the VGA input signal on both the HDMI and VGA output devices.
- **Audio Integration:** If the 3.5mm audio cable is connected, the audio signal from your source device will be embedded into the HDMI output.

MAINTENANCE

To ensure the longevity and optimal performance of your adapter, follow these simple maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the adapter. Do not use liquid cleaners or aerosols.
- **Storage:** Store the adapter in a cool, dry place away from direct sunlight and extreme temperatures when not in use.
- **Handling:** Avoid dropping the device or subjecting it to strong impacts. Do not attempt to

disassemble the adapter.

TROUBLESHOOTING

- **No Display on Screen:**

- Ensure the USB power cable is securely connected to a working power source. The adapter requires external power.
- Verify all VGA and HDMI cables are securely connected to both the adapter and the display devices.
- Check the input source selection on your display devices to ensure they are set to the correct HDMI or VGA input.
- Test with different cables or display devices if possible to rule out faulty components.

- **Poor Picture Quality or Flickering:**

- Ensure the USB power cable is providing stable power.
- Check the resolution settings on your source computer. While the adapter supports up to 1080P, some older VGA cards might have limitations.
- Ensure the cables used are of good quality and not excessively long.

- **No Audio Output (HDMI):**

- Confirm the 3.5mm audio cable is correctly connected from your source device's audio output to the adapter's audio input.
- Check the audio output settings on your source computer to ensure audio is being sent through the 3.5mm jack.
- Verify the volume levels on your display device and source computer.

SPECIFICATIONS

Model Number	000013
Input	VGA Male
Output	HDMI Female, VGA Female
Supported Input Resolution (PC)	800x600 to 1920x1080
Supported HDMI Output Resolution	Up to 720P/1080i/1080P
Power Supply	5V/1A via Micro USB (cable included)
Audio Support	3.5mm audio input for HDMI output (cable included)
Color	Black
Item Weight	7.3 ounces (208 Grams)
Package Dimensions	3.94 x 3.94 x 1.18 inches

WARRANTY AND SUPPORT

Specific warranty details and direct support contact information are not provided within this manual. Please refer to your purchase documentation or contact the retailer for information regarding warranty coverage

and customer support.