

Edifier T5s

Edifier T5s Subwoofer Instruction Manual

Model: T5s

1. INTRODUCTION

Thank you for purchasing the Edifier T5s Subwoofer. This manual provides detailed instructions for the proper setup, operation, and maintenance of your new audio device. Please read this manual thoroughly before use to ensure optimal performance and safety.



Figure 1: Edifier T5s Subwoofer, showcasing its sleek black finish and front-facing woofer.

2. PACKAGE CONTENTS

Please verify that all items listed below are included in your package:

- Edifier T5s Subwoofer Speaker (with standard removable dust net) x 1
- 3.5mm AUX to RCA Audio Cable x 1
- RCA to RCA Audio Cable x 1
- Power Cable x 1
- Quick Start Guide x 1

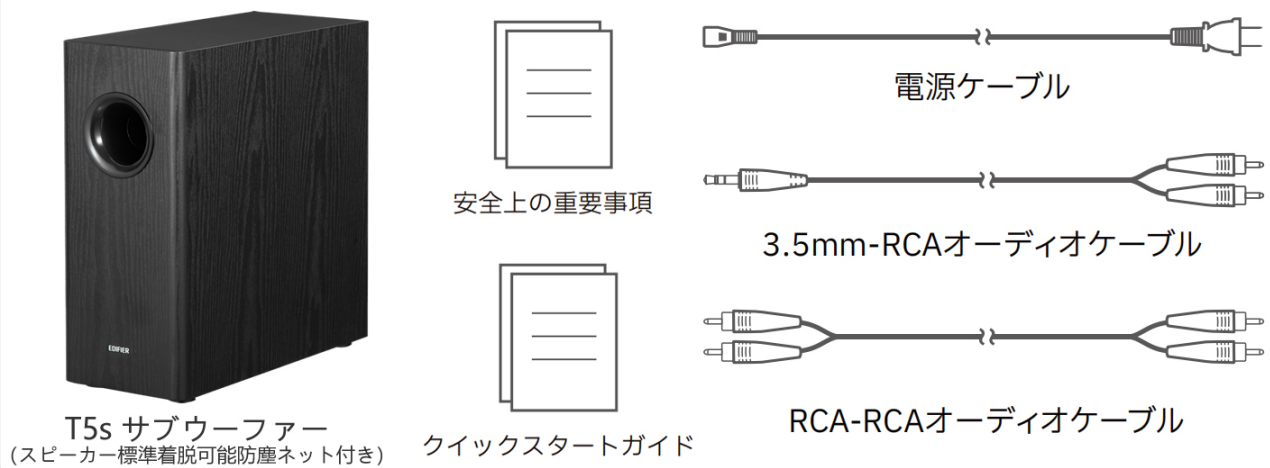


Figure 2: Visual representation of all items included in the Edifier T5s Subwoofer package, including the subwoofer unit, various audio cables, and documentation.

3. SETUP

Follow these steps to set up your Edifier T5s Subwoofer:

3.1 Placement

The Edifier T5s features a compact, slim design with a side-firing port, reducing the space required for placement by approximately 50% compared to traditional models. Its dimensions are 39.9 cm (depth) x 17 cm (width) x 40 cm (height), allowing for flexible placement in various environments such as desks, living rooms, or near walls.

設置自由度最大化

39.9奥行 x 17幅 x 40高さ cm



Figure 3: Diagram illustrating the compact dimensions of the Edifier T5s Subwoofer: 39.9cm depth, 17cm width, and 40cm height.

3.2 Connections

The T5s Subwoofer supports 3.5mm AUX and RCA connections. Connect the subwoofer to your audio source (e.g., computer, TV, game console, music player) and main speakers using the appropriate cables provided.

Example Connection with Edifier G2000 Speakers:

1. Connect the G2000 speakers (or any speakers with a Sub-out terminal) and your audio device (PC, player, etc.).
2. Connect the G2000 speakers (or any speakers with a Sub-out terminal) to the T5s Subwoofer using the included AUX to RCA audio cable.



Figure 4: Connection diagram showing how to connect the Edifier T5s Subwoofer to Edifier G2000 speakers using the included AUX to RCA audio cable.

Example Connection with Edifier M60 Speakers:

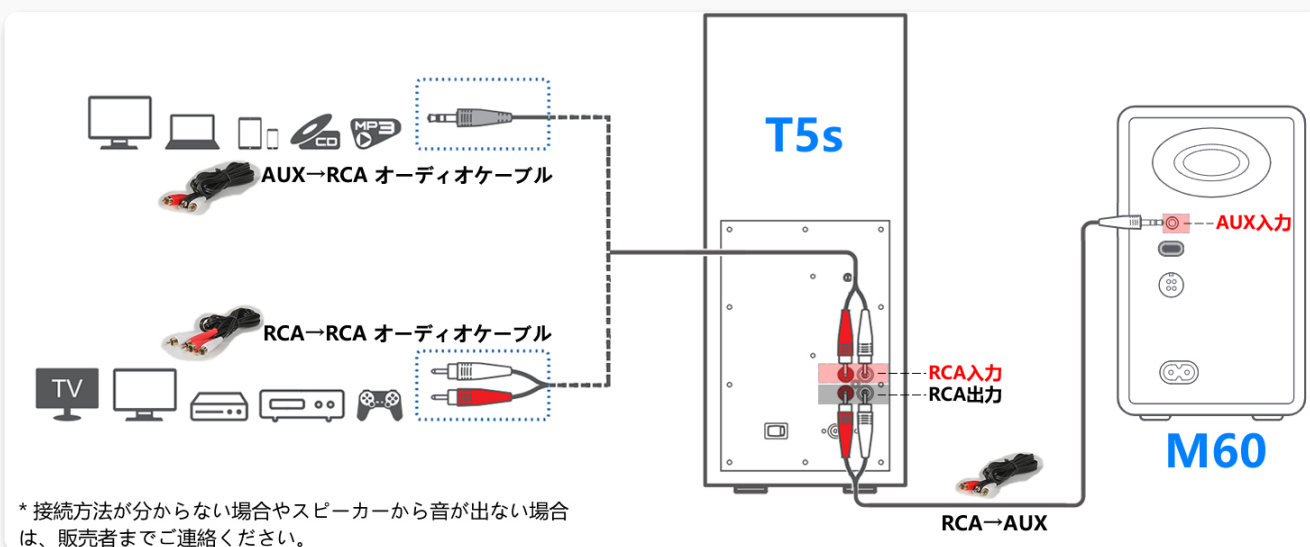


Figure 5: Connection diagram illustrating the setup of the Edifier T5s Subwoofer with Edifier M60 speakers, utilizing RCA connections.

Example Connection with Edifier MR3 Speakers:

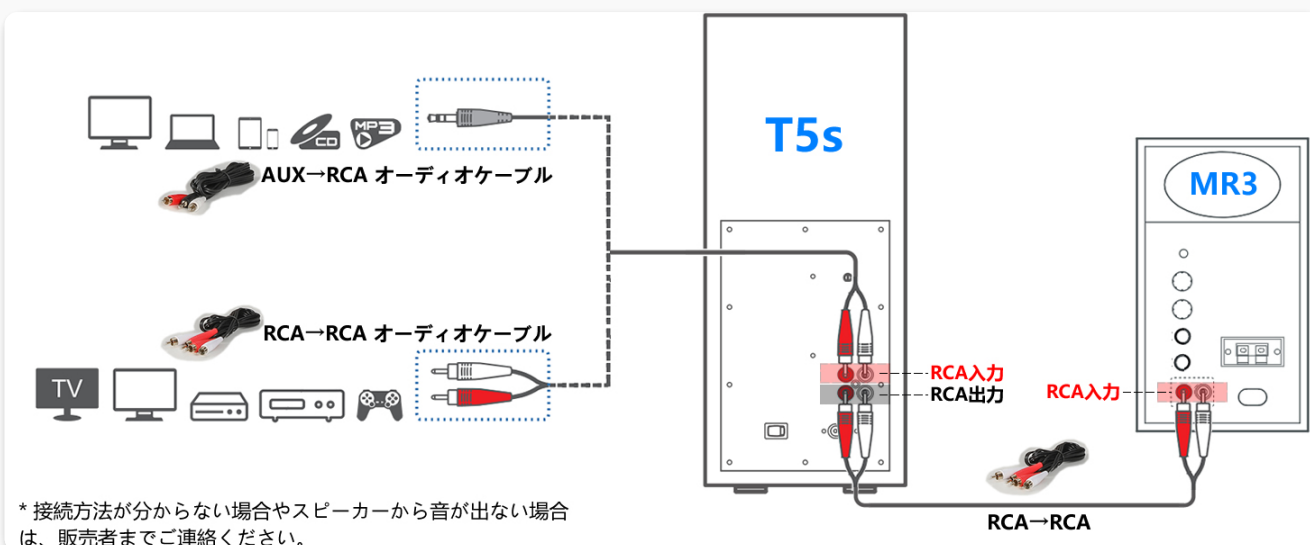


Figure 6: Connection diagram demonstrating how to connect the Edifier T5s Subwoofer to Edifier MR3 speakers using RCA cables.

Note: If you are unsure about the connection method or if there is no sound from the speakers, please contact the seller for assistance.

4. OPERATING INSTRUCTIONS

The Edifier T5s Subwoofer is designed for powerful and precise low-frequency reproduction.

4.1 Power and Performance

The T5s delivers 70W RMS (140W peak output) and features an 8-inch long-throw woofer, achieving deep bass reproduction down to 35Hz. It incorporates a Texas Instruments high-performance analog front-end and closed-loop Class D audio amplifier, ensuring high-precision AD/DA conversion and noise-free amplification for professional-grade sound.

エディファイア最新鋭

70W | 8 インチロングストロークユニット | 35Hz 低音



Figure 7: Image emphasizing the Edifier T5s Subwoofer's key performance metrics: 35Hz low-frequency response and 70W power output.

プロフェッショナルサウンド

Texas Instruments 製ハイパフォームチップ

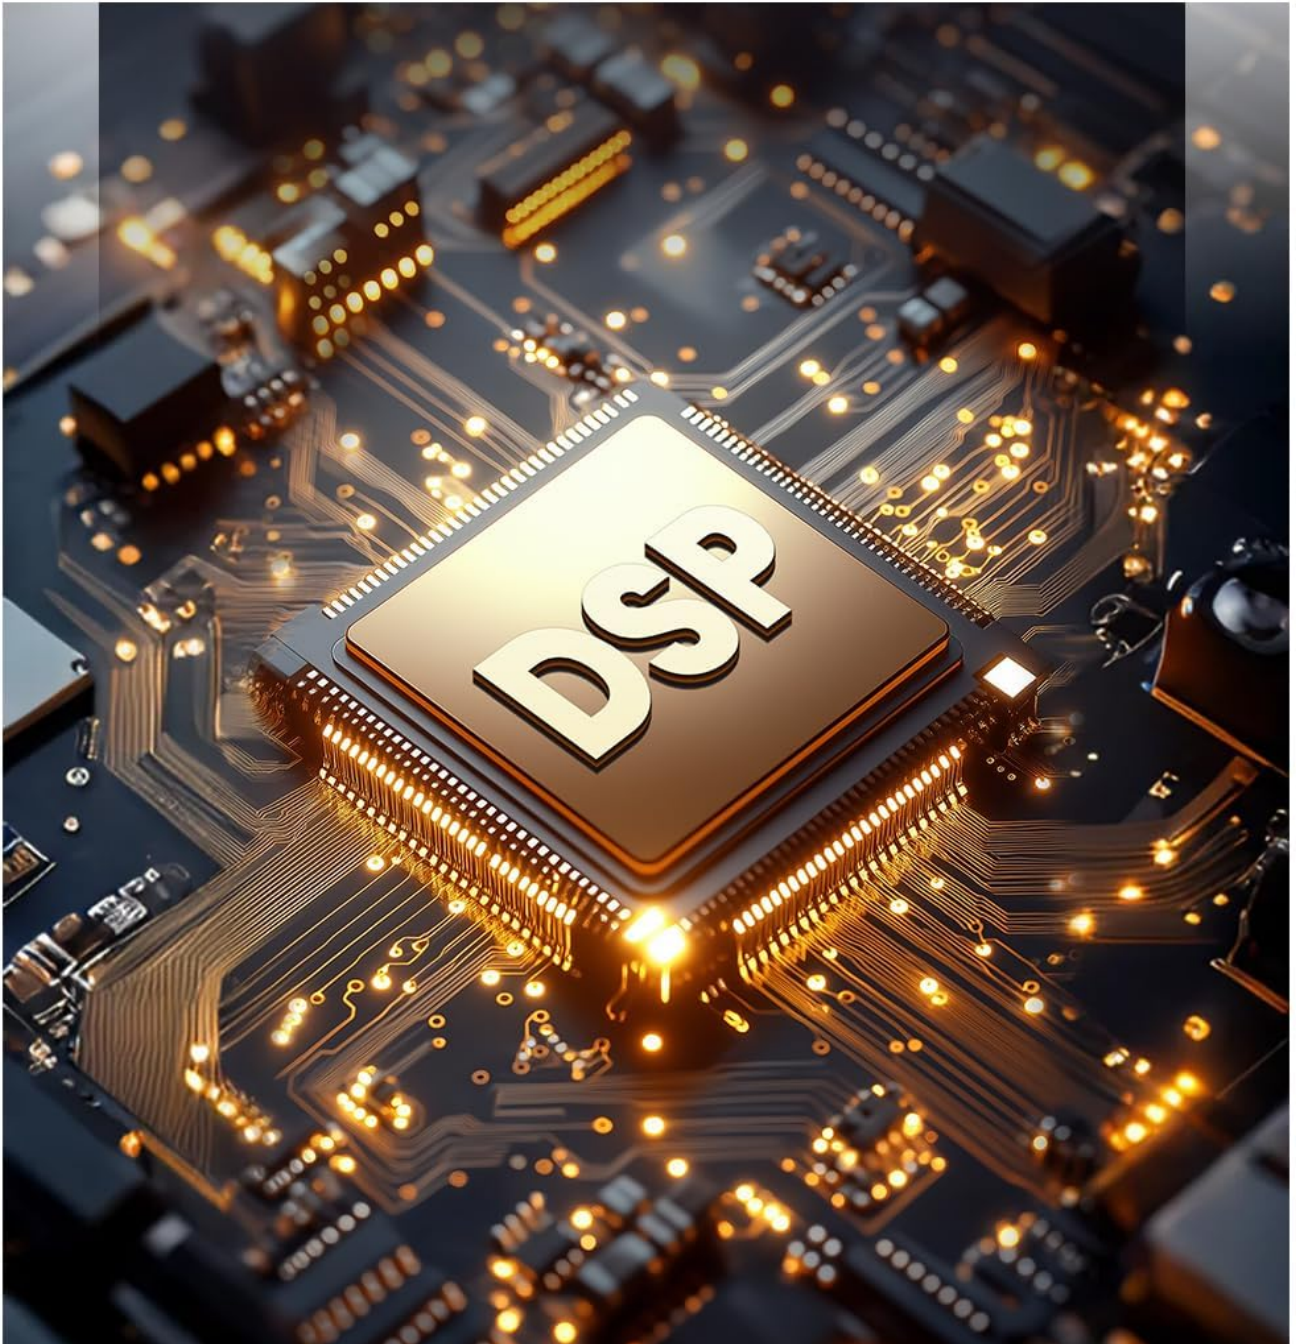


Figure 8: Close-up view of the Texas Instruments DSP chip, central to the T5s Subwoofer's professional sound processing capabilities.

4.2 Controls and Adjustments

The T5s Subwoofer features precise adjustment functions on its rear panel:

- **Low-Pass Filter (LPF):** Adjust the playback frequency range from 30-160Hz. This allows you to fine-tune the crossover point between the subwoofer and your main speakers.
- **Phase Control:** Switch between 0° and 180° phase. This function helps eliminate low-frequency interference within your listening space and prevents muddy bass caused by standing waves, especially when the subwoofer is placed near a wall.

精密調整機能

30-160Hz 低域通過・0°/180° 位相制御



Figure 9: Detailed view of the rear panel of the Edifier T5s Subwoofer, showing the Low-Pass Filter (LPF) and Phase control knobs for precise audio adjustments.

4.3 Power Saving

The T5s is designed with energy efficiency in mind. It automatically enters standby mode when there is no operation or audio playback for 15 minutes, reducing power consumption to less than 0.5W. It will automatically activate when an audio signal is detected.

省電力設計

自動待機モード（消費電力 0.5W 未満）



Figure 10: The Edifier T5s Subwoofer positioned in a living space, illustrating its power-saving design and seamless integration into home environments.

5. MAINTENANCE

The Edifier T5s Subwoofer features an 18mm thick high-density MDF enclosure, which minimizes resonance and ensures pure bass quality. No specific routine maintenance is required for the internal components.

- **Cleaning:** Use a soft, dry cloth to wipe the exterior of the subwoofer. Do not use liquid cleaners or aerosol sprays, as they may damage the finish or internal components.
- **Dust Net:** The subwoofer includes a standard removable dust net. Periodically remove and clean the dust net to maintain optimal sound quality and prevent dust buildup on the woofer.

- **Storage:** If storing the subwoofer for an extended period, ensure it is powered off and disconnected from the power source. Store it in a cool, dry place away from direct sunlight and extreme temperatures.



Figure 11: The Edifier T5s Subwoofer integrated into a modern living room setup, demonstrating its aesthetic appeal and compact footprint.

6. TROUBLESHOOTING

If you encounter issues with your Edifier T5s Subwoofer, please refer to the following common solutions:

- **No Power:** Ensure the power cable is securely connected to both the subwoofer and a working power outlet. Check if the power outlet is active.
- **No Sound:**
 - Verify that the audio cables (3.5mm AUX or RCA) are correctly connected to both the subwoofer and your audio source/main speakers.
 - Check the volume level on your audio source and ensure it is not muted.
 - Confirm that the subwoofer is not in standby mode. It should automatically wake up upon receiving an audio signal.
- **Distorted or Unclear Bass:**
 - Adjust the Low-Pass Filter (LPF) knob on the rear panel to find the optimal crossover frequency for your main speakers.
 - Experiment with the Phase control (0°/180°) to correct any phase cancellation issues, especially if the subwoofer is placed near a wall or in a corner.
 - Ensure the subwoofer is placed on a stable surface to prevent vibrations.
- **Humming or Buzzing Noise:**
 - Check all cable connections for looseness.
 - Try connecting the subwoofer to a different power outlet.
 - Ensure audio cables are not running parallel to power cables to avoid interference.

If the issue persists after trying these steps, please contact Edifier customer support or your retailer for further assistance.

7. SPECIFICATIONS

Feature	Specification
Model Name	T5s
Speaker Type	Subwoofer
Subwoofer Diameter	8 inches
Wattage (RMS)	70 W
Peak Power Output	140 W
Frequency Response	35 Hz (lower limit)
Connectivity Technology	RCA
Audio Output Mode	Stereo
Material	Plastic, Wood, Metal (18mm MDF enclosure)
Product Dimensions (D x W x H)	39.9 cm x 17 cm x 40 cm
Product Weight	10.38 kg
Control Method	Push Button
Power Source	Power Cord
Recommended Use	Gaming, Computer, Surround Sound System, TV, Music Player
Compatible Devices	Game Console, TV, Desktop, Laptop, Home Theater

8. WARRANTY AND SUPPORT

The Edifier T5s Subwoofer comes with a Limited Warranty. For specific details regarding the warranty period and terms, please refer to the warranty card included in your package or visit the official Edifier website. For technical support, troubleshooting assistance beyond this manual, or warranty claims, please contact your retailer or Edifier customer service directly. Keep your purchase receipt as proof of purchase for warranty purposes.

9. OFFICIAL PRODUCT VIDEOS


No official product videos from the seller were available for embedding at this time.



© 2025 Edifier. All rights reserved.

EDIFIER®


T5s Powered Subwoofer



— Quick Start Guide —


Model: S1200B

1. What's in the box?




Note:
*Response to the button is sensitive only and may differ from the actual product.
*Due to the need of actual environment and system settings, information and specifications cannot be taken as the basis for applying the actual product.
*If any difference occurs, the actual product prevails.

2. Standby & wake-up




Please pay attention to the high power button on the power panel:
*Press OFF button to turn power indicator to "OFF".
*Power supply: 100-240V 50/60Hz AC 10A.
*The power button is not a power switch.
*If the power button is not working, please check the power supply and the power button.
*If the power button is not working, please check the power supply and the power button.
*If the power button is not working, please check the power supply and the power button.

3. Cable connection

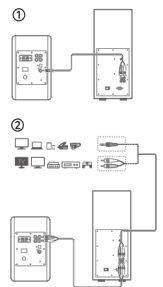

Note:
*Do not connect the subwoofer to the power outlet terminal of a powered amplifier or receiver.
*Do not connect the subwoofer to the power outlet terminal of a powered amplifier or receiver.
*Do not connect the subwoofer to the power outlet terminal of a powered amplifier or receiver.
*Do not connect the subwoofer to the power outlet terminal of a powered amplifier or receiver.
*Do not connect the subwoofer to the power outlet terminal of a powered amplifier or receiver.

4. Setup



Volume adjustment:
Note: The subwoofer has a volume control knob on the front panel.
1. Set the volume of the subwoofer to the minimum.
2. Set the volume of the main speaker system to a moderate level.
3. Set the volume of the subwoofer to the minimum.
4. Set the volume of the main speaker system to a moderate level.
5. Set the volume of the subwoofer to the minimum.
6. Set the volume of the main speaker system to a moderate level.
7. Set the volume of the subwoofer to the minimum.
8. Set the volume of the main speaker system to a moderate level.
9. Set the volume of the subwoofer to the minimum.
10. Set the volume of the main speaker system to a moderate level.

5. Specifications

Total input power: 100W/120W
Frequency response: 20-200Hz

6. Troubleshooting

No power:
*Make sure that the power cable is properly connected.
*Make sure that the power supply is not disconnected.
No sound:
*Make sure that the product and your device is properly connected.
*Make sure that the volume is not too low.
*Make sure that the product is not damaged.
*Make sure that the product is not damaged.


Note: During the operation:
*EDIFIER speakers generate little noise, while the background noise of some audio devices can be high. Please adjust the volume and turn the volume up. If the sound can be heard at 1 meter away from the speakers, there is no problem with the product.

To learn more about EDIFIER, please visit www.edifier.com.
For EDIFIER warranty service, please visit the relevant country page on www.edifier.com and review the applicable Warranty Terms.
USA and Canada: sales@edifier.com
South America: Please visit www.edifier.com (English) or www.edifier.com (Spanish) for the relevant information.

Edifier T5s Powered Subwoofer Quick Start Guide


A quick start guide for the Edifier T5s Powered Subwoofer, covering setup, connections, and troubleshooting. Includes specifications and warranty information.

EDIFIER® Głośnik Edifier D12 Instrukcja obsługi	Instrukcja obsługi głośnika Edifier D12 Szczegółowy przewodnik po obsłudze głośnika Edifier D12, obejmujący instrukcje bezpieczeństwa, zawartość opakowania, opis elementów sterujących, funkcje pilota, specyfikacje techniczne, rozwiązywanie problemów oraz informacje o zgodności i ochronie środowiska.
EDIFIER E25HD Powered Speaker System User manual - Guide d'installation - Manual de montage - Manual de instalação	EDIFIER E25HD Powered Speaker System User Manual Comprehensive user manual for the EDIFIER E25HD Powered Speaker System, covering setup, operations, Bluetooth connectivity, specifications, and troubleshooting.
EDIFIER® MR4 Studio Monitor For use with 1.8m x 0.6m x 0.3m (60" x 24" x 12") Studio Monitor	Edifier MR4 Studio Monitor User Manual and Specifications User manual and specifications for the Edifier MR4 Studio Monitor speakers. Learn about setup, connections, audio inputs/outputs, functional operation, troubleshooting, and safety guidelines. Features 21W+21W power, 60Hz-20KHz frequency response, and multiple input options. Visit edifier.com for more.
	EDIFIER A3-8 EDIFIER A3-8
EDIFIER® M60 Multimedia Speaker — Manual — EN 1. EDIFIER Connect app With this app, you can • Switch system modes. • Control play. • Select or randomize CDs. • Upgrade the firmware, and • Reset speakers. Download EDIFIER Connect app 1. With your smart device, scan the QR code on the quick start guide or the packaging. * You can also search for "EDIFIER Connect" in Apple Store iOS download or Google Play Android download. 2. Download and install the app. How to use the app 1. Connect your smart device with the speaker via Bluetooth. 2. In Bluetooth mode, open EDIFIER Connect App on your smart device. 3. Tap the icons for settings and playback control. Note: You'll be prompted between your smart device and the speaker remains active once if the speaker is switched to near Bluetooth input mode. 2. What's in the box? 3. Cable connection	




Note:
* Power input: 100-240V~50/60Hz 100Watt
* This plug type is for illustration purpose only.

4. Standby & wake-up




Note:
To switch the speaker to standby mode or work mode, tap and hold the "Q" button on the speaker.

5. Source selection




USB IN : 
AUX IN : 

6. Bluetooth connection

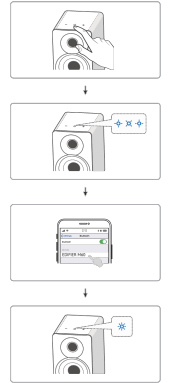


Note:
- The mode for connection is "BTSP" if needed.
- To enjoy all Bluetooth functions of the product, make sure that your audio source device supports A2DP and AVRCP profiles.
- If the device is connected to 10 meters, the speaker will switch to Bluetooth mode. The "Q" button backlight will turn a breathing pattern. In this mode, if you desire connect to the speaker, tap Q to disconnect that mode.
- In the pairing mode of the speaker, you can select "EDIFIER M60" from all Bluetooth devices list to connect. To exit from Bluetooth pairing mode, tap the "Q" button on the speaker.
- To disconnect from the current Bluetooth device, tap and hold the "Q" and "T" buttons on the speaker for 15 seconds.

7. USB connection



Note:
The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.

8. Play control



Note:
In AUX and USB modes, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.

9. Specifications

Total output power: 2x45W, L/R Channels: 100W-150W
L/R Peak: 150W and 150W
Frequency response: 20Hz-20KHz
Impedance: 16Ω
Frequency band: 2.402GHz ~ 2.4835GHz
RF Power Output: <15 dBm (EIRP)
There is no restriction of use.

10. Troubleshooting

Cannot connect to your Bluetooth device

- Make sure that the distance between the product and your Bluetooth device is less than 10 meters and there are no obstacles between them.
- Make sure that the device is connected to the product via Bluetooth.
- Make sure that the product is in Bluetooth pairing mode. If not, manually switch to BT mode.
- Restart this product, enable Bluetooth function on your Bluetooth device, and then try again.

No power

- Make sure that the power cable is properly connected.
- Make sure that the power supply is not disconnected.

No sound

- Make sure that the product is powered on.
- Make sure that the product and your device is properly connected.
- Make sure that the playback is not paused.
- Make sure that the product and your device are not muted.
- Increase the volume of the product and your device.

Note coming from speakers

- EDIFIER speakers generate little noise, while the background noise of some audio devices are too high. Please unplug audio cables and turn the volume up. You should not be heard at 1 meter away from the speaker. There is no problem with this product.

To learn more about EDIFIER, please visit www.edifier.com.
For EDIFIER warranty queries, please visit the relevant country page on www.edifier.com and choose the option (United Kingdom / Spain / USA and Canada / serviced@edifier.com / South America / Please visit www.edifier.com (English) or www.edifier.com (Spanish/Portuguese) for local contact information.


[EDIFIER M60 Multimedia Speaker User Manual](#)

Comprehensive user manual for the EDIFIER M60 multimedia speaker, covering setup, connections, features, troubleshooting, and specifications. Learn how to use the EDIFIER ConneX app for enhanced control.

EDIFIER™

T5s


Powered Subwoofer



— Quick Start Guide —

Model EDF100100

1. What's in the box?



Subwoofer



Quick start guide



Important safety instructions



Power cable



3.5mm - RCA audio cable



RCA to RCA audio cable


Note:

• Images are for illustrative purpose only and may differ from the actual product.

• For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product.

If any difference is found, the actual product prevails.

2. Standby & wake-up

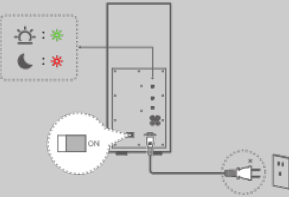

Power on: Switch the main power button on the rear panel to "ON".

Power off: Switch the main power button to "OFF".

Note:


• Power input: 100-240 V~ 50/60 Hz 400 mA

• This plug type is meant for illustration purpose only.


• If there is no audio signal input in 15 minutes, the subwoofer will enter standby mode automatically (red LED steady lit). If audio signal input resumes, the subwoofer will wake up automatically (green LED steady lit).


3. Cable connection

①



②

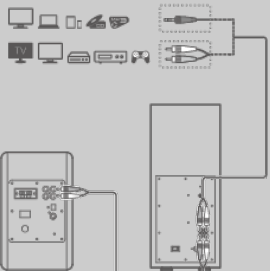

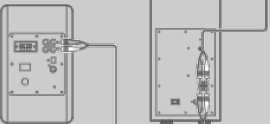

Note:

• Do not connect the subwoofer to the power output terminal of a powered amplifier device.

• Unplug the power cables of subwoofer and audio source device from the wall outlet prior to any connections.

Method 1:

If the main speaker system has a port for connecting an external subwoofer, connect the port on the main speaker system and the Signal In ports on this subwoofer. And then connect the audio source device to the subwoofer.

[\[pdf\]](#) User Manual Quick Start Guide Instructions Specifications Guide

T5s User Manual V1 Guide DownloadT5s Powered Subwoofer Edifier

Australia7e327c7784aed194fec0961ef5441596cdn shopify s files 1 0042 7248 8536

7e327c7784aed194fec0961ef5441596 v 1756714723 AustraliaEdifier schwarz Price Comparison Skinflint

UKv1cdn 1756714723gzhls at blob ldb 2 d 7 0183a147e6cc7b749a49f70ae9b011d7b969 ||| ||| T5s

Powered Subwoofer Quick Start Guide Model: EDF100100 1. What s in the box Subwoofer Quick start

guide Important safety instructions Power cable 3.5mm - RCA audio cable RCA to RCA audio cable Note:

Images are for illustrative purpose onl

T5s Powered Subwoofer Quick Start Guide Model: EDF100100 1. What s in the box

Subwoofer Quick start guide Important safety instructions Power cable 3.5mm - RCA


audio cable RCA to RCA audio cable Note: Images are for illustrative purpose only

and may differ from the actual product. For the n...

lang:en **score:42** filesize: 691.27 K page_count: 7 document date: 2025-06-26

Method 2:
If the main speaker system has no port for connecting an external subwoofer, connect the audio input port on the main speaker system and the Signal Out port on this subwoofer, and then connect the Signal In port on this subwoofer and the audio output port on the audio source device.

4. Setup



Volume adjustment
Note: If the audio source device has a bass gain control, adjust it to 0dB before setup.
1. Set the volume of this subwoofer to the minimum.
2. Set the volume of the audio source device to a desired level.
3. Set the volume of the main speaker system to a desired level.
4. Adjust the volume of this subwoofer to match the volume of the main speaker system.
5. After the setup is complete, adjust the audio source device's master volume to control the subwoofer and the main speaker system's volume simultaneously.

Low-pass filter adjustment
- If the audio source device is equipped with a low-pass filter, rotate the LFP knob on the subwoofer to the rightmost. The crossover point is determined by the audio source device.
- If not, rotate the LFP knob to set the crossover point. Only frequencies below the set point are transmitted to the subwoofer driver.
Tip: If the main speaker system has a speaker over 4 inches, set the crossover point of the subwoofer to 50-100 Hz. Otherwise, set the crossover point to 90-150 Hz. The smaller the speaker of the main speaker system, the higher the crossover frequency of the subwoofer should be.

Phase selection
Switch the phase selector to 0° or 180° to obtain optimal bass performance at the listening position.

5. Specifications

Total output power (RMS): 70 W
Frequency response: 35 Hz-115 Hz

6. Troubleshooting

No power

- Make sure that the power cable is properly connected.
- Make sure that the power supply is not disconnected.

No sound

- Make sure that this product and your device is properly connected.
- Make sure that the correct audio input source is selected.
- Make sure that the playback is not paused.
- Increase the volume of the product and your device.

Noise coming from speakers

- EDIFIER speakers generate little noise, while the background noise of some audio devices are too high. Please unplug audio cables and turn the volume up. If no sound can be heard at 1 meter away from the speaker, there is no problem with this product.

To learn more about EDIFIER, please visit: www.edifier.com
For EDIFIER warranty queries, please visit the relevant country page on www.edifier.com and review the section titled Warranty Terms.
USA and Canada: service@edifier.ca
South America: Please visit www.edifier.com (English) or www.edifierla.com (Spanish/Portuguese) for local contact information.

EDIFIER®

R1700BTs
Active Speaker


For manual | Manual d'utilisateur | Manual do usuário | Bedienungsanleitung
Manual del usuario | Manual do utilizador | ユーザーズガイド

[pdf] User Manual Installation Guide Instructions Frequently Asked Questions
Accessories

IB 200 R1700B 08 R1700BTs 127x127mm V1 1 R1700BTs User Manual 1Configure su dispositivo
Bluetooth para buscar y seleccionar EDIFIER el testigo azul se iluminará fijo Para desconectar
mantengav1edifier my 2024 06 srsItid

AfmBOop7r2BMTAUUsByfsIKQnxfAQN178xzlJzSlla79s88E4jQYsU mantengaEdifier Active Bookshelf
Speakers Edifier T5 Subwoofer K B Audiov1edifier r1700bts user manualedifier
AfmBOop7r2BMTAUUsByfsIKQnxfAQN178xzlJzSlla79s88E4jQYsUcdn shopify s files 0055 9906 8206
edifier manual v 1749564274 1EDIFIER Configure EdifierEdifier Audiov1R1700BTs 1edifier 0747 3768
0702 1713253601cdn ||| ||| R1700BTs Active Speaker User manual Manuel d utilisateur Manual de
usuario Bedienungsanleitung Manuale dell utente Manual do utilizador Important safety instruction 1.
Please read the instructions carefully. Keep it in safe place for future ||| R1700BTs Active Speaker User
manual Manuel d utilisateur Manual de usuario Bedienungsanleitung Manuale dell utente Manual do
utilizador Important safety instruction 1. Please read the instructions carefully. Keep it in safe place for
future

R1700BTs Active Speaker User manual Manuel d utilisateur Manual de usuario
Bedienungsanleitung Manuale dell utente Manual do utilizador Important safety
instruction 1. Please read the instructions carefully. Keep it in safe place for future
reference. 2. Use only accessories approved b...
lang:en score:35 filesize: 4.75 M page_count: 72 document date: 2022-07-27

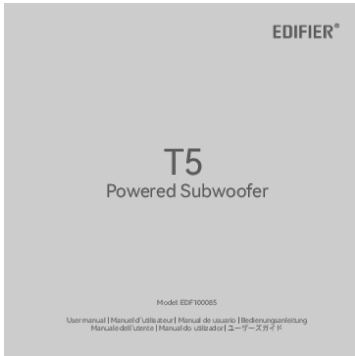

[Edifier T5 Powered Subwoofer User Manual](#)

This user manual provides detailed instructions for the Edifier T5 Powered Subwoofer, including setup, connections, volume adjustment, and troubleshooting.
lang:en score:31 filesize: 2.08 M page_count: 50 document date: 2024-06-17




[\[pdf\] User Manual Installation Guide Instructions Accessories](#)

IB 200 T00050 02 T5 127x127mm V1 1 T5 User Manuals Edifier Malaysia Manual edifier my 2024 06

|||

T5 Powered Subwoofer User manual Manuel d'utilisateur Manual de usuario Bedienungsanleitung Manuale dell'utente Manual do utilizador Important safety instruction 1. Please read the instructions carefully. Keep it in safe place for future reference. 2. Use only accessories approved by th...

lang:en score:30 filesize: 2.86 M page_count: 50 document date: 2021-06-03

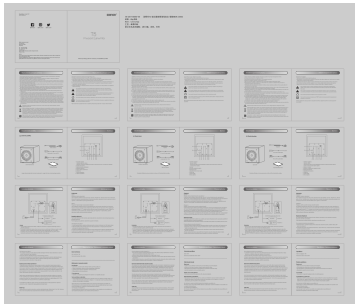


[\[pdf\] User Manual](#)

T5 NEOX V1 0 IB 220 T00050 00 T5 updated EDIFIER Subwoofer NeoxShop cz neoxshop images manuals Edifier |||

Manual Edition 1.0, April 2021 IB-220-T00050-00 Edifierglobal Edifier_Global Edifier_Global Edifier International Limited P.O. Box 6264 General Post Office Hong Kong Tel: 852 2522 6989 Fax: 852 2522 1989 www.edifier.com 2021 Edifier International Limited. All rights reserved. Printed in Chi...

lang:pl score:30 filesize: 1.86 M page_count: 1 document date: 2021-04-22

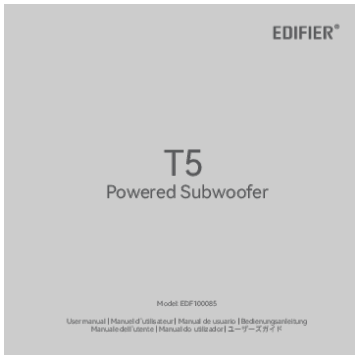



[\[pdf\] User Manual Quick Start Guide Instructions Specifications Guide](#)

T5 User Manual V1 0 Support for Edifier UK ab7c8c4b29b818271ce3ae9f8b50c016 new edifier us oss files 20240918 |||

T5 Powered Subwoofer Model: EDF100085 User manual Manuel d'utilisateur Manual de usuario Bedienungsanleitung Manuale dell'utente Manual do utilizador What s in the box Subwoofer Power cable 3.5mm - RCA audio cable Quick start guide RCA to RCA audio cable Important safety instructi...

lang:en score:30 filesize: 606.7 K page_count: 50 document date: 2024-09-18

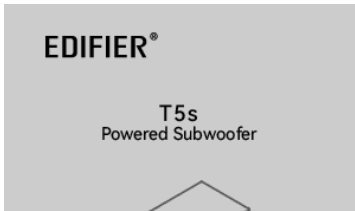




— Quick Start Guide —

Model: EDP1100100

1. What's in the box?



Subwoofer



Quick start guide



Important safety instructions



Power cable




3.5mm - RCA audio cable



RCA to RCA audio cable

Note:
• Images are for illustrative purpose only and may differ from the actual product.
• For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. If any difference is found, the actual product prevails.


2. Standby & wake-up

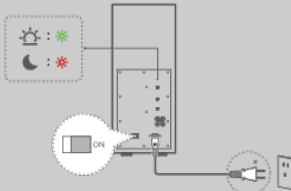

Power on: Switch the main power button on the rear panel to 'ON'.
Power off: Switch the main power button to 'OFF'.

Note:
* Power input: 100-240V~50/60Hz 400mA
* This plug type is meant for illustration purpose only.
• If there is no audio signal input in 15 minutes, the subwoofer will enter standby mode automatically (red LED steady lit). If audio signal input resumes, the subwoofer will wake up automatically (green LED steady lit).

3. Cable connection

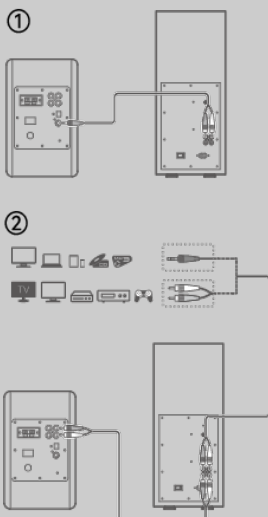

Note:
• Do not connect the subwoofer to the power output terminal of a powered amplifier device.
• Unplug the power cables of subwoofer and audio source device from the wall outlet prior to any connections.


Method 1:
If the main speaker system has a port for connecting an external subwoofer, connect the port on the main speaker system and the Signal In ports on this subwoofer, and then connect the main speaker system and the audio source device.

Method 2:
If the main speaker system has no port for connecting an external subwoofer, connect the audio input port on the main speaker system and the Signal Out ports on this subwoofer, and then connect the Signal In ports on this subwoofer and the audio output port on the audio source device.

4. Setup


[Edifier T5s Powered Subwoofer Quick Start Guide](#)

A quick start guide for the Edifier T5s Powered Subwoofer, covering setup, connections, and troubleshooting. Includes specifications and warranty information.
lang:en score:30 filesize: 691.27 K page_count: 7 document date: 2025-06-26

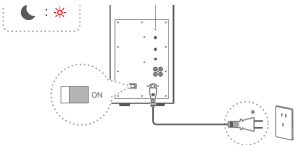


Ligar: Mude o botão principal de energia no painel traseiro para "ON".
Desligar: Mude o botão principal de energia para "OFF".
Nota:
• Entrada de energia: 100-240 V~ 50/60 Hz 400 mA
• Este tipo de conector é utilizado somente para fins de ilustração.
• Se não houver entrada de sinal de áudio em 15 minutos, o subwoofer entrará no modo de espera automaticamente (LED vermelho continuamente aceso). Se a entrada de sinal de áudio retornar, o subwoofer irá despertar automaticamente (LED verde continuamente aceso).

3. Conexão via cabo

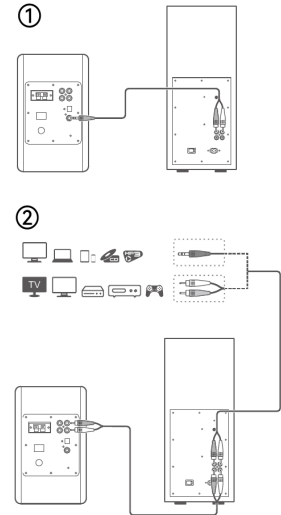

Nota:
• Não conecte o subwoofer ao terminal de saída de potência de um dispositivo amplificador ligado.
• Desconecte os cabos de energia do subwoofer e do dispositivo da fonte de áudio da tomada antes de fazer quaisquer conexões.
Método 1:
Se o sistema de alto-falante principal tiver uma porta para conectar um subwoofer externo, conecte a porta no sistema de alto-falante principal e as portas de Entrada de Sinal neste subwoofer, em seguida conecte o sistema de alto-falante principal e o dispositivo da fonte de áudio.
Método 2:
Se o sistema de alto-falante principal não tiver uma porta para conectar um subwoofer externo, conecte a porta de entrada de áudio no sistema de alto-falante principal e as portas de Saída de Sinal neste subwoofer, em seguida conecte as portas de Entrada de Sinal neste subwoofer e a porta de saída de áudio no dispositivo da fonte de áudio.

4. Configuração



Ajuste de volume
Nota: Se o dispositivo da fonte de áudio tiver controle de ganho de grave, ajuste-o para 0dB antes de configurar.
1. Defina o volume deste subwoofer no mínimo.
2. Defina o volume do dispositivo da fonte de áudio no nível desejado.
3. Defina o volume do sistema do alto-falante principal no nível desejado.
4. Ajuste o volume deste subwoofer para corresponder ao volume do sistema do alto-falante principal.
5. Depois que a configuração estiver completa, ajuste o volume mestre do dispositivo da fonte de áudio para controlar o volume do subwoofer e do sistema do alto-falante principal simultaneamente.
Ajuste do filtro passa-baixo
• Se o dispositivo da fonte de áudio estiver equipado com um filtro passa-baixo, gire o botão LFP no subwoofer totalmente para a direita. O ponto de cruzamento é determinado pelo dispositivo da fonte de áudio.
• Caso contrário, gire o botão LFP para definir o ponto de cruzamento. Somente frequências abaixo do ponto definido são transmitidas ao driver do subwoofer.
Dica: Se o sistema do alto-falante principal tiver um alto-falante acima de 4 polegadas, defina o ponto de cruzamento do subwoofer em 50 a 90 Hz. Caso contrário, defina o ponto de cruzamento em 90 a 150 Hz. Quando menor o alto-falante do sistema de alto-falante principal, maior deverá ser a frequência de cruzamento do subwoofer.
Seleção de fase
Mude o seletor de fase para 0° ou 180° para obter o melhor desempenho de grave na posição de audição.

5. Especificações

Potência de saída total (RMS): 70 W
Resposta de frequência: 35 Hz-115 Hz

6. Resolução de problemas

Sem energia

- Certifique-se que o cabo de energia está corretamente conectado.
- Certifique-se que a alimentação de energia não foi interrompida.

Sem som

- Certifique-se que o produto e seu dispositivo estão corretamente conectados.
- Certifique-se que a fonte de entrada de áudio correta foi selecionada.
- Certifique-se que a reprodução não está pausada.
- Aumente o volume deste produto e do seu dispositivo.

Ruído proveniente das colunas

- As colunas EDIFIER geram pouco ruído, ao passo que o ruído de fundo de alguns dispositivos de áudio é bastante alto. Desligue os cabos de áudio e

[\[pdf\]](#) User Manual


T5s User Manual V1 DownloadSubwoofer 70W RMS EDIFIERv1edifierbr br 2025 08 |||

Subwoofer **T5s**. Conte do da caixa Subwoofer **T5s** Guia de in cio r pido Instru es importantes de seguran a Cabo de alimenta o Cabo de udio RCA de 3,5mm Cabo de udio RCA para RCA Nota: As imagens s o apenas ilustrativas e podem diferir do produto real. Por necessidade de m...

lang:pt score:26 filesize: 1.92 M page_count: 1 document date: 2025-06-06

aumente o volume, se não escutar nenhum som a 1 metro de distância da coluna, significa que existe um problema com este produto.

Para mais informações sobre a EDIFIER, consulte o site www.edifier.com
Para obter informações sobre a garantia da EDIFIER, acceda à página relevante do país em www.edifier.com e consulte a secção dos Termos da Garantia.
EUA e Canadá: service@edifier.ca
América do Sul: Visite o site www.edifier.com (Inglês) ou www.edifierla.com (Espanhol/Português) para obter informações sobre o contacto local

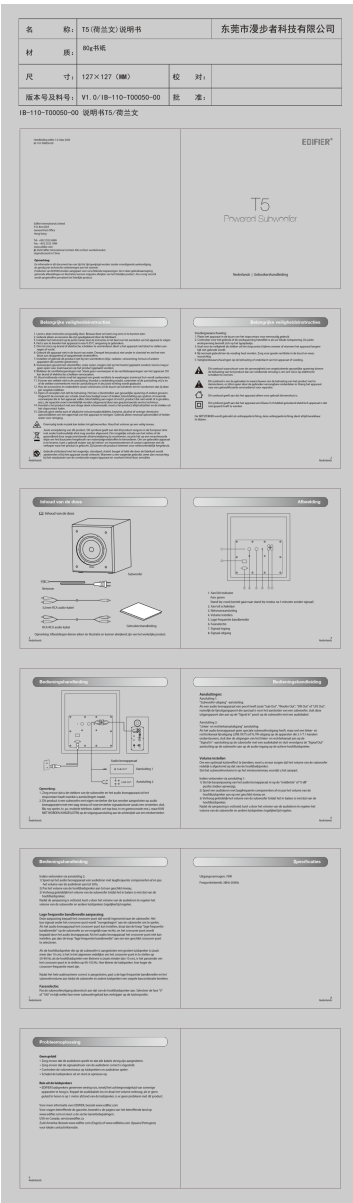

[pdf]

IB 110 T00050 00 T5 127x127mm V1 0 T5 Coolblue T5 127x127 MM Voor
meer informatie over EDIFIER bezoek edifier.com vragen t5 actieve subwoofer manuals coolblue be e1 |||
T5 80g 127127MM V1.0/IB-110-T00050-00 IB-110-T00050-00 T5/ Handleiding editie
1.0, May 2020 IB-110-T00050-00 Edi er International Limited P.O. Box 6264 General
Post O ce Hong Kong Tel: 852 2522 6989 Fax: 852 2522 1989 www.edi-er.com 2020
Edi er International Limited. Alle ...
lang:nl score:25 filesize: 579.56 K page_count: 1 document date: 2020-05-09



[pdf] User Manual Installation Guide Instructions Accessories

IB 200 T00050 02 T5 127x127mm V1 1 User ManualEdifier R1855DB Active Bookshelf Speakers
Edifier T5 Subwoofer K B Audioedifier t5 subwoofer user manualcdn shopify s files 0055 9906 8206
edifier manual v 1717784202 |||
T5 Powered Subwoofer User manual Manuel d utilisateur Manual de usuario
Bedienungsanleitung Manuale dell utente Manual do utilizador Important safety
instruction 1. Please read the instructions carefully. Keep it in safe place for future
reference. 2. Use only accessories approved by th...
lang:en score:25 filesize: 2.82 M page_count: 50 document date: 2021-06-03



[\[pdf\]](#) User Manual Installation Guide Instructions Accessories

Manual de utilizare T5 BK a2t ro luciana atu tech Edifier speakers generate little noise while the background of some audio devices are too high Please unplug cables and turn volume up if no source ||| T5 Powered Subwoofer Important safety instruction 1. Please read the instructions carefully. Keep it in safe place for future reference. 2. Use only accessories approved by the manufacturer. 3. Install the instrument properly by following the instructions in the device connection section. 4. Using...


lang:en score:25 filesize: 100.68 K page_count: 9 document date: 2024-06-19



[\[pdf\]](#) User Manual Installation Guide Instructions Accessories

User ManualEdifier R1855DB Active Bookshelf Speakers Edifier T5 Subwoofer K B Audioedifier r1855db user manualcdn shopify s files 1 0055 9906 8206 edifier manual v 1679586916 ||| R1855DB Multimedia Speaker User manual Manuel d utilisateur Manual de usuario Bedienungsanleitung Manuale dell utente Manual do utilizador Important safety instruction 1. Please read the instructions carefully. Keep it in safe place for future reference. 2. Use only accessories approved...


lang:en score:25 filesize: 1.37 M page_count: 62 document date: 0000-00-00

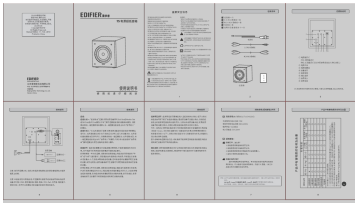

[\[pdf\]](#) User Manual

IB-100-T00050-02 T5 V1 1 Edifier Manual Edition Feb 2019 Printed in China

T5-V1 2_H1PSDFytu static edifier uploads 2021-05 edifier-asset ventmere cn 2019 20192 Copyright 2019 All Rights Reserved. Manual Edition 1.1, Feb. 2019 Printed in China www.edifier.com : 68 Beijing Edifier Technology Co., Ltd. Made in China SUB OUT R LINE OUT L DVDPad 4 T5 * * * * 0-35 * * * * * 5cm * * * * * ... lang:i-klngon score:24 filesize: 659.32 K page_count: 1 document date: 2021-04-26

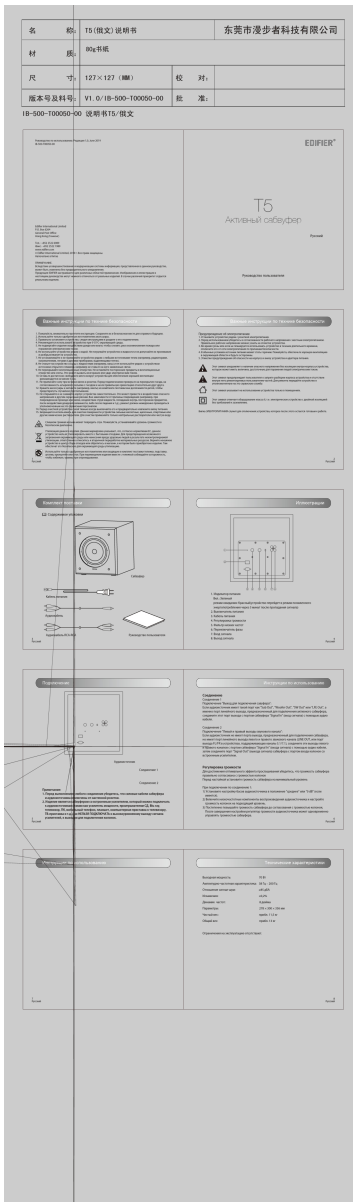

[\[pdf\]](#) User Manual Instructions

T5 User manual V1.0 edifier ru user IB 500 T00050 00 T5 127x127mm 80g

127x127MM T5 Руководство по пользователю Сабвуфер EDIFIER |||


T5 80g 127127MM V1.0/IB-500-T00050-00 IB-500-T00050-00 T5/ . 1,0, June 2019

IB-500-T00050-00 Edi er International Limited P.O. Box 6264 General Post O ce

Hong Kong . : 852 2522 6989 : 852 2522 1989 www.edi er.com Edi er International

Limited, 2019 . . . , ...

lang:da score:24 filesize: 594.28 K page_count: 0 document date: 0000-00-00

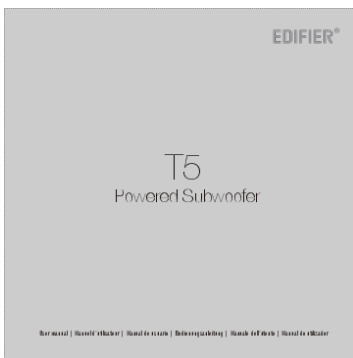

[Edifier T5 Powered Subwoofer User Manual](#)

Comprehensive user manual for the Edifier T5 Powered Subwoofer, covering safety instructions, box contents, illustrations, operational guide, connections, volume adjustment, low frequency bandwidth adjustment, phase selection, specifications, and troubleshooting.

lang:en score:23 filesize: 2.82 M page_count: 50 document date: 2021-06-03



[\[pdf\]](#) User Manual Quick Start Guide Instructions Specifications Guide

Uputstvo za upotrebu EN EDIFIER zvučnik Subwoofer T5 uputstvo en edifier zvucnik subwoofer t5
6703cf7d097ed api tehnoteka rs 2024 10 |||

<https://tehnoteka.rs> Uputstvo za upotrebu EN EDIFIER zvucnik Subwoofer T5

Tehnoteka je online destinacija za uporeivanje cena i karakteristika bele tehnike, potrosacke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Nasa stranica vam omoguava da istrazite najnovije i...

lang:en score:22 filesize: 967.02 K page_count: 52 document date: 2024-10-07

[\[pdf\]](#) User Manual Installation Guide Instructions Guide Accessories

IB 200 T00050 02 T5 127x127mm V1 1 T5 80g 127x127 MM User manual

33 Italiano 34 35 36 Illustrationen Powered Subwoofer Lieferumfang Schachtelinhalt Bedienungsanleitung

Operational Guide Connections Connection Output connection If audio source device has the port like

Sub Out Woofer SW or LFE namely line output 2021043016333316197716137533 usa oss edifier

Uploads images 2021 04 30 Verbindungen Verbindung Anschluss an „Subwoofer Ausgang Ist die

Audioquelle mit einem wie „Sub „Woofer „SW oder „LFE ausgestattet das IQn1WWen online int en 2020

cdn ventmere dev T5


Manual Edition 1.1, May 2019 IB-200-T00050-02 Edifier International Limited P.O.


Box 6264 General Post Office Hong Kong Tel: 852 2522 6989 Fax: 852 2522 1989

www.edifier.com 2019 Edifier International Limited. All rights reserved. Printed in

China NOTICE: For the need of technical improvement an...


lang:en score:22 filesize: 557.24 K page_count: 1 document date: 2019-05-14

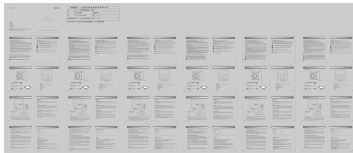

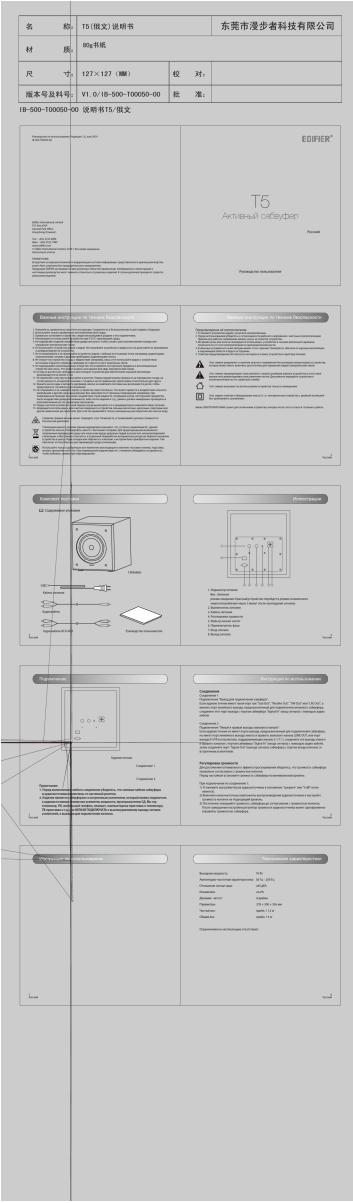

[pdf] User Manual Instructions

Руководство пользователяРуководство пользователяIB 500 T00050 00 T5 127x127mm V1 0IB
T5 EdifierIB 0Руководство пользователяСабвуфер EDIFIER T5Сабвуфер T5 T5 80g
127x127MM IB по 127x127 MM Продукция настраивается для
различных областей примененияСабвуфер T5T5 User manual 0T5 0edifier ru user |||
T5 80g 127127MM V1.0/IB-500-T00050-00 IB-500-T00050-00 T5/ . 1,0, June 2019
IB-500-T00050-00 Edi er International Limited P.O. Box 6264 General Post O ce
Hong Kong .: 852 2522 6989 : 852 2522 1989 www.edi er.com Edi er International
Limited, 2019 . . . , ...
lang:da score:21 filesize: 594.28 K page_count: 0 document date: 2019-09-19

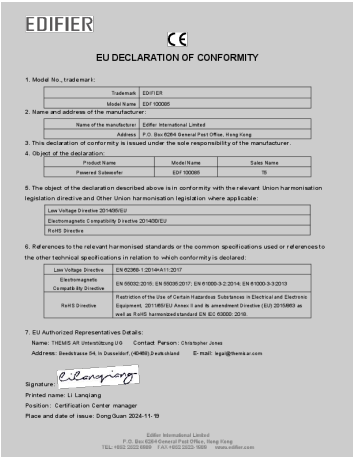

[pdf] Specifications Declaration of Conformity

EC Declaration of Conformity Jerry CE T5EDIFIER T5 Subwoofer Wizard czCE T5wizard cz images
EDIFIER |||
EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER
Model Name EDF100085 2. Name and address of the manufacturer: Name of the
manufacturer Edifier International Limited Address P.O. Box 6264 General Post
Office, Hong Kong 3. This declaration of conformity is issued under the ...
lang:en score:21 filesize: 83.41 K page_count: 1 document date: 2024-11-19




[pdf]

IB 200 T00050 02 T5 127x127mm V1 1 docId AD390B570EBFD7E0671C5E47533BE9A4 Návod k obsluze cze Edifier T5 mélynyomó fekte 49846 21287 81c300ee72d36b8d351fb98c6185fdc5 puputeve hu media wysiwyg attachments |||

T5 Napjen subwoofer Dlezit bezpecnostn pokyny 1. Pecliv si pectte pokyny. Uschovejte jej na bezpecnm mst pro budouc pouzit. 2. Pouzvejte pouze pslusenstv schvlen vrobcem. 3. Pstroj sprvn nainstalujte podle pokyn v csti o pipojen pstroje. 4. Doporučuje se pouzvat vrobek v prosted s teplotou 0-35 C....

lang:hr score:18 filesize: 449.29 K page_count: 11 document date: 2024-04-08

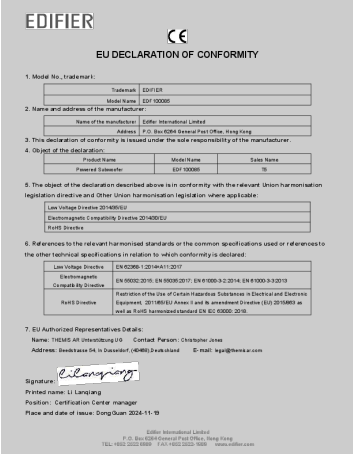

[pdf] Specifications Decleration of Conformity


EC Declaration of Conformity Jerry Download EU Edifier 0516f530e56f26fa17a3d07c9f1b071e new

edifier us oss files 20250106 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER

Model Name EDF100085 2. Name and address of the manufacturer: Name of the manufacturer Edifier International Limited Address P.O. Box 6264 General Post Office, Hong Kong 3. This declaration of conformity is issued under the ...

lang:en score:18 filesize: 61.84 K page_count: 1 document date: 2025-01-06

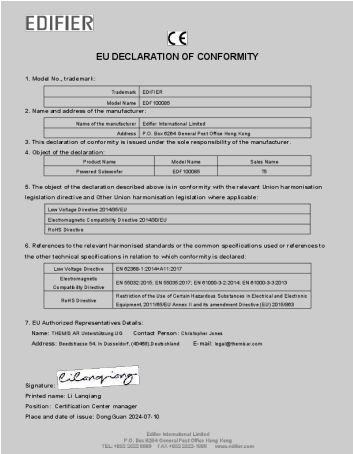

[pdf] Specifications Decleration of Conformity

EC Declaration of Conformity Jerry Download EU Edifier 3c8a46a02546200e8cef0a38f6cb9069 new

edifier us oss files 20240729 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER

Model Name EDF100085 2. Name and address of the manufacturer: Name of the manufacturer Edifier International Limited Address P.O. Box 6264 General Post Office Hong Kong 3. This declaration of conformity is issued under the s...

lang:en score:18 filesize: 61.49 K page_count: 1 document date: 2024-07-29

EDIFIER
EU DECLARATION OF CONFORMITY

1. Model No., trademark: Trademark EDIFIER

2. Name and address of the manufacturer: Name of the manufacturer Edifier International Limited

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. Object of the declaration: Product Name Model Name T5s

5. The object of the declaration described above is in conformity with the relevant Union harmonization legislation directives and other Union harmonization legislation where applicable.

6. References to the relevant harmonized standards or the common specifications used or references to the other technical specifications in relation to which conformity is declared

7. EU Authorized Representative Details: Name: T5S22 All connecting via

[pdf] Specifications Declaration of Conformity


EC Declaration of Conformity Jerry Download EU Edifier 1ecfaef3bdd8b1803cde1d0a599697df new edifier us oss files 20250523 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER Model Name EDF100100 2. Na ... 4. Object of the declaration: Product Name Model Name Sales Name Powered Subwoofer EDF100100 **T5s** 5. The object of the declaration described above is in conformity with the relevant Union harmo... lang:en score:18 filesize: 69.96 K page_count: 1 document date: 2025-05-23

[pdf] User Manual


P12 Edifier All Rights Reserved Manual Edition 1 0 Aug 2018 Printed in China T5 SkzCmZXjm edifier asset ventmere cn 10 static 3 5 RCA

2 2018 20188 Copyright 2018 All Rights Reserved. Manual Edition 1.0, Aug. 2018 Printed in China IB-100-T00050-00 L L L SUB OUT R LINE OUT L DVDPad 4 T5 * * 0-35 * 5cm * CLASS II * 5000 *... lang:i-klnglon score:18 filesize: 1.06 M page_count: 1 document date: 2018-08-17

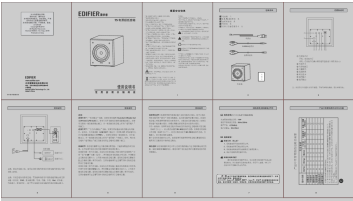

[pdf] User Manual Installation Guide Instructions Accessories

EDIFIER T5 Dartyand game console etc but CANNOT BE CONNECTED to rear power output terminal of powered amplifier device Audio source Connection 1 2 SUB c0aa01e77da6b430afaa4952958093de6fc69f31fc darty notices c a c0aa01e77da6b430afaa4952958093de6fc69f31 ||| MANUEL EDIFIER T5 NOTICE D UTILISATION Tous nos Tutos vido Darty.com Tous nos magasins Communaut SAV Darty T5 Powered Subwoofer User manual Manuel d utilisateur Manual de usuario Bedienungsanleitung Manuale dell utente Manual do utilizador Important safety instruction 1. Please re... lang:en score:17 filesize: 2.93 M page_count: 51 document date: 2024-12-23

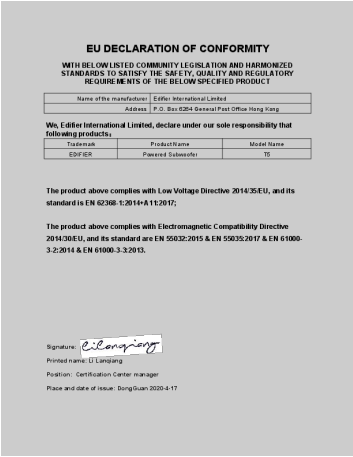


[pdf] Decleration of Conformity

EC Declaration of Conformity Jerry 2021101414243616341926762075 usa oss edifier Uploads images 2021 10 14 |||

EU DECLARATION OF CONFORMITY WITH BELOW LISTED COMMUNITY LEGISLATION AND HARMONIZED STANDARDS TO SATISFY THE SAFETY, QUALITY AND REGULATORY REQUIREMENTS OF THE BELOW SPECIFIED PRODUCT Name of the manufacturer Edifier International Limited Address P.O. Box 6264 General Post Office Hong Kong We, Edi...

lang:en score:17 filesize: 82.97 K page_count: 1 document date: 2021-10-13

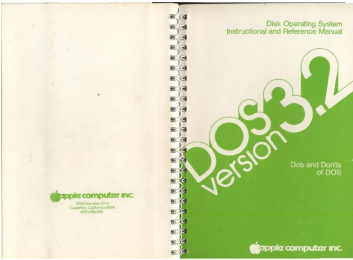


[pdf] User Manual

Apple DOS 3 2 Instruction and Reference Rescanned by Marcus Bennett maben homeip net static S100 apple OS |||

Disk Operating System Instructional and Reference Manual -computx r InC 10260 Bondley Drive CuP r1Ino. California 95014 408 996-1010 Apple Co-uter Inc. reserves the right to make improve.enta tn the product described in thia Dual at any tle and without notice. DISCLAIMER OF ALL WARRANTIES AND ...

lang:en score:16 filesize: 13.86 M page_count: 96 document date: 2010-03-27

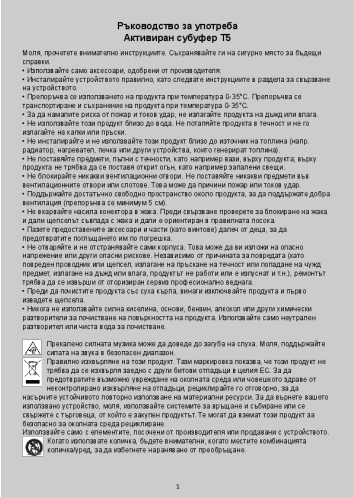

[pdf]

359876079766 Ръководство Т5 Тонколона Fenda F D Trolley TROLLEY Цена от 244 97 лв JAR Computers rykovodstvo t5 1707830310 jarcomputers images custom docs |||

T5 , . . . , . 0-35C. 0-35C. , , , 5

lang:af score:16 filesize: 583.9 K page_count: 6 document date: 2023-12-08




[pdf] Declaration of Conformity

Сертификат T5 Тонколона Fenda F D Trolley TROLLEY Цена от 244 97 лв JAR Computers sertifikat t5 1707830309 jarcomputers images custom docs |||

EU DECLARATION OF CONFORMITY WITH BELOW LISTED COMMUNITY LEGISLATION AND HARMONIZED STANDARDS TO SATISFY THE SAFETY, QUALITY AND REGULATORY REQUIREMENTS OF THE BELOW SPECIFIED PRODUCT Name of the manufacturer Edifier International Limited Address P.O. Box 6264 General Post Office Hong Kong We, Ed...

lang:en score:16 filesize: 250.53 K page_count: 2 document date: 2021-08-25

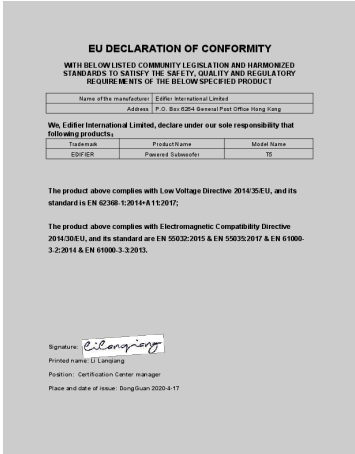


[pdf] Declaration of Conformity

EC Declaration of Conformity Jerry Download EU Edifier 48f95b6e60abf37067e79d23354ed67f test edifierus oss us east 1 aliynuncs files 20230517 |||

EU DECLARATION OF CONFORMITY WITH BELOW LISTED COMMUNITY LEGISLATION AND HARMONIZED STANDARDS TO SATISFY THE SAFETY, QUALITY AND REGULATORY REQUIREMENTS OF THE BELOW SPECIFIED PRODUCT Name of the manufacturer Edifier International Limited Address P.O. Box 6264 General Post Office Hong Kong We, Edi...

lang:en score:16 filesize: 52.47 K page_count: 1 document date: 2023-05-17

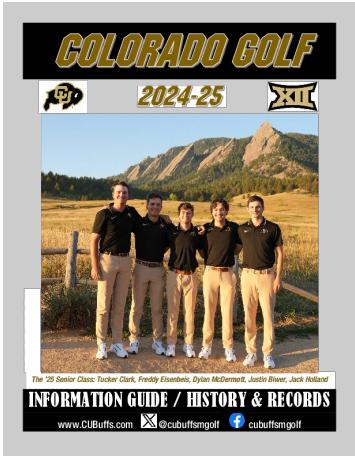


[pdf] Guide

Microsoft Word CU GOLF 2024 25 Guide DavidP INFORMATION GUIDE HISTORY RECORDS Amazon S3 pro just prior to the Pac 12s His 2013 14 Buffaloes set mark T1 Jonathan Kaye 70 71 74—215 4 Bobby Kalinowski 74 75 69 timestamp 20250220040035 s3 us east 2 amazonaws sidearm nextgen sites cubuffs documents 2025 20 |||

The 25 Senior Class: Tucker Clark, Freddy Eisenbeis, Dylan McDermott, Justin Biwer, Jack Holland INFORMATION GUIDE / HISTORY RECORDS www.CUBuffs.com cubuffsmgolf cubuffsmgolf TABLE OF CONTENTS 2024-25 Quick Facts 1 Athletic Director Rick George ...

lang:de score:16 filesize: 9.64 M page_count: 176 document date: 2025-02-11

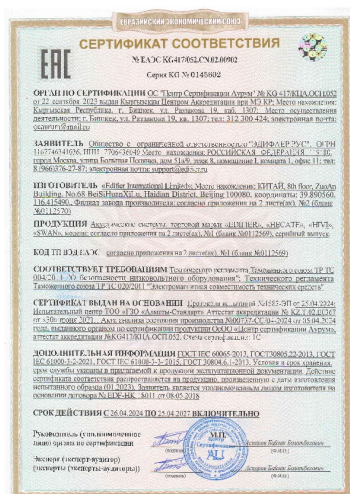

[pdf]

EAЭС KG417 052 CN 02 00902 Edifier город Москва улица Большая Полянка дом 51а 9 этаж 8
помещение I комната 1 офис 11 тел 966 376 27 87 электронная почта support@edifier.ru edifier cert
|||

N EA3C KG4r7 10s2.CN.02.00902 Cepns. KG J b 0145602 OPTAH TIO CEPTI4
DUKAIUUU ocaurum mail.ru 3A- IBUTEIb uqennofr orBercrBeHuocrtro 3 OAEP PY I-
PH 167746341036. I4HH 1706436049 M oEnEPAUIAF, i 19180. U3IOTOBII4TEJIb
difier.ru Limitedi : Mecro J 90112s70 IIOFyKIItfI Arc vcna. ecKue c...


lang:es score:15 filesize: 1.45 M page_count: 6 document date: 2024-04-26



[pdf] User Manual

tec AI61 Ursa vp Salvador Escoda Sistemas de aislamiento y construcción conductos climatización
ventilación URSA® manual Tec Aislamiento S A Ursazz salvadoreescoda tecnico AI |||
SALVADOR ESCODA S.A. Provena, 392 pl. 1 y 2 08025 BARCELONA Tel. 93 446
27 80 www.salvadoreescoda.com Fax 93 456 90 32 CATLOGO TCNICO MANUALES,
CATLOGOS Y HOJAS TCNICAS: EN NUESTRA WEB Sistemas de aislamiento y
construccion de conductos de climatizacin y ventilacin cat_URSAAIR2010.inddd 1
AISLAM...

lang:es score:15 filesize: 1.51 M page_count: 16 document date: 2011-10-18

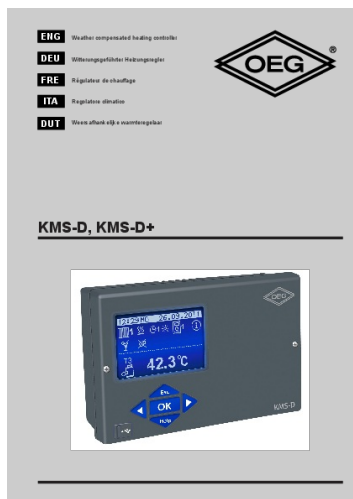

[pdf] User Manual

KMS D solar more de mediafiles manuals 17 mar 2023 — User manual ENG SERVICE PARAMETERS
General service parameters Service for the first heating circuit second |||
ENG Weather compensated heating controller DEU Witterungsgefhrter
Heizungsregler FRE Rgulateur de chauffage ITA Regolatore climatico DUT
Weersafhankelijke warmteregelaar KMS-D, KMS-D ENG DEU FRE Weather
compensated heating controller KMS-D, KMS-D Witterungsgefhrter Heizungsregler
KMS-D, KMS-...


lang:en score:14 filesize: 13.49 M page_count: 410 document date: 2017-03-23

[\[pdf\]](#) User Manual Installation Guide Instructions Accessories

IB 200 R1280D 05 R1280DBs 127x127mm V1 User ManualEdifier R1280DBs Active Bookshelf
Speakers Edifier T5 Subwoofer K B AudioR1280DBScdn shopify s files 1 0192 6791 1744 R1280DBS v
1631200559 |||

Manual Edition 1.0, March. 2020 IB-200-R1280D-05 Edifier International Limited P.O.
Box 6264 General Post Office Hong Kong Tel: 852 2522 6989 Fax: 852 2522 1989
www.edifier.com 2020 Edifier International Limited. All rights reserved. Printed in
China NOTICE: For the need of technical improvement...

lang:en score:14 filesize: 8.78 M page_count: 1 document date: 2020-04-07

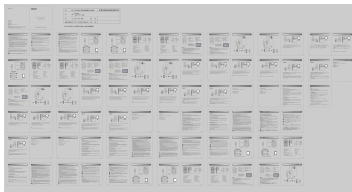


[\[pdf\]](#) User Manual

IB 100 T00050 02 T5 V1 1 gw Edifier Manual Edition Feb 2019 Printed in China EDIFIER edifier
68 Beijing T5 ryr azUPV asset ventmere cn 03 static

...

lang:en score:13 filesize: 8.09 M page_count: 10 document date: 2019-03-08

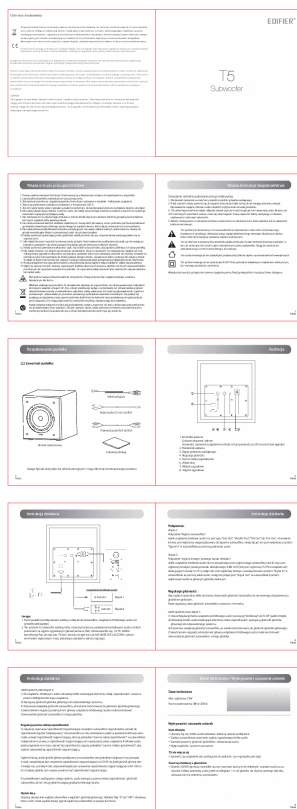


[pdf]

T5 PO Subwoofer 9 lug 2024 — 4 Zaleca się użytkowanie produktu w środowisku o temperaturze 0 35 5 Aby zmniejszyć ryzyko pożaru i porażenia prądem elektrycznym nie należy narażać Instrukcja obsługi EDIFIER DP680 electro pl products files 33 3358160 |||

Ochrona środowiska Zużyty sprzęt elektroniczny oznakowany zgodnie z dyrektyw Unii Europejskiej, nie może być umieszczany łącznie z innymi odpadami komunalnymi.

Podlega on selektywnej zbiórce i recyklingowi w wyznaczonych punktach. Zapewniając jego prawidłowe usuwanie, zapobiegasz potencjalnym, negatywnym konsekwencjom.

lang:pl score:13 filesize: 402.99 K page_count: 1 document date: 2023-04-19

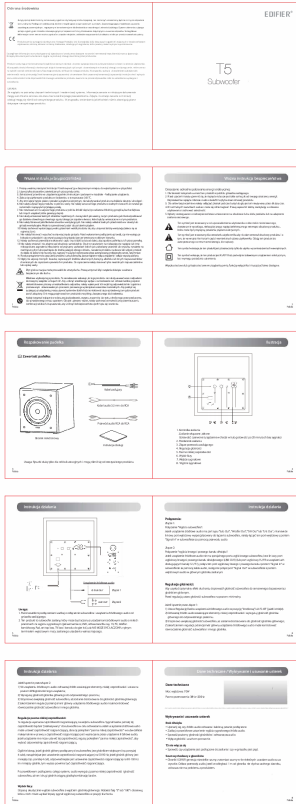

[pdf]

T5 PO Subwoofer 9 lug 2024 — 4 Zaleca się użytkowanie produktu w środowisku o temperaturze 0 35 5 Aby zmniejszyć ryzyko pożaru i porażenia prądem elektrycznym nie należy narażać Instrukcja obsługi EDIFIER DP680 mediaexpert pl products files 33 3358160 ||| Ochrona środowiska Zużyty sprzęt elektroniczny oznakowany zgodnie z dyrektyw Unii Europejskiej, nie może być umieszczany łącznie z innymi odpadami komunalnymi. Podlega on selektywnej zbiórce i recyklingowi w wyznaczonych punktach. Zapewniając jego prawidłowe usuwanie, zapobiegasz potencjalnym, negatywnym konsekwencjom. lang:pl score:13 filesize: 379.41 K page_count: 1 document date: 2023-04-19

PART C. Hardware Periphery Compatibility		
1. Hard Drives		
1.1. HDD Devices		
Type		Model
SATA 6G	HGST	HDS721010DLE630
		HDS721010DLE630
		HDS724040ALE640
		HUH728080ALE600
	Seagate	HDN726060ALE610
		HDN726060ALE614
		ST500DM002
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
SATA 6G	TOSHIBA	ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
		ST1000DM003
SATA 6G	WD	WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX
		WD1000FAX


[pdf]

Vista Procedure QTC MZ 7LN120 4268 850 7KE256 850PRO 75K1T0 850EVO 750250 750EVO EDIFIER S5 1MKII R151T TRANSWIN T 200N USB 1 Edifier R10U Logitech S PRIME H310M C Devices report model dlcndnets asus pub ASUS mb LGA1151 ||| PART C. Hardware Periphery Compatibility 1. Hard Drives 1.1. HDD Devices Type SATA 6G HGST Seagate TOSHIBA WD Model HDS721010DLE630 HDS721050DLE630 HDS724040ALE640 HUH728080ALE600 HDN726060ALE610 HDN726040ALE614 ST500DM002 ST1000DM003 ST3000DM001 ST2000DM001 ST1000LM014 ST4000DM000 ST1000DX001 S... lang:tl score:13 filesize: 344.25 K page_count: 18 document date: 2018-05-10



[pdf] User Manual

EDIFIER T5
edt5 manual japanese princeton co jp sites default files
support |||
- 1 w w w w w w w w w w D N w w w w w w ** N N 3 3 3 w w 6 8 2 8 7 5 / , 1 2 8 7 / 7
4 V C 0 V U 8 P P G F S 0 V U 4 8 0 V U - 0 V U 4 J H O B M * O - * / 0 6 5 - 3 4 J H O B M * O 4 J H O B M 0 V U
N J E E M F E # ...
lang:af score:13 filesize: 183.04 K page_count: 0 document date: 0000-00-00

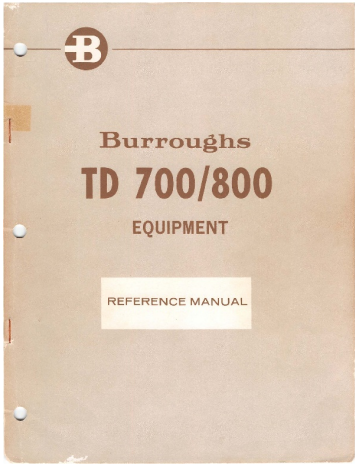

[pdf] User Manual

Burroughs 1068699 TD700 TD800 Reference Manual 197307 bitsavers trailing edge burroughs Terminal
|||
Burroughs TD 700/800 . EQUIPMENT REFERENCE MANUAL u Burroughs .. TD
700/800 EQUIPMENT u REFERENCE MANUAL v u. Printed in S. America Burroughs
Corporation Detroit, Michigan 48232 7-73 1068699 COPYRIGHT 1971, 1972, 1973
AA289530 AA386642 Burrough. Corporation DETROIT, MICHIGAN 48232 v ...
lang:i-klngon score:13 filesize: 9.6 M page_count: 101 document date: 2023-05-07

PART C. Hardware Periphery Compatibility

1. Hard Drives

1.1. SATA SSD

Type	Model
SATA 6G SSD	ADATA AD4000SS 128G 3963 AD4000SS 240G 4256 SU900 256G 4271 ASX950SS 480G 4369 R08A 128G
	AMD R11 128G 4342 R2 240G 4348 AS780SS 128G
	ANACONDA T1 128G 4342 N2 240G 4348 AP240GAS750 240G
	APACER AP240GAS750 240G AP240GAS750 240G
	CORSAIR C300 128G 4342 C300 240G 4348 C300 480G 4369
	Crucial CT500MX300SSD1 CT500MX300SSD1 CT500MX300SSD1
	FUJITSU F300 240G
	Intel SSDSC2000 128G 4342 SSDSC2000 240G 4369 SSDSC2000 480G 4369
	Kingston SK4000 128G 4342 SK4000 240G 4369 SK4000 480G 4369
	LITEON ML110 128G 4342 ML110 240G 4369 ML110 480G 4369
SATA 6G SSD	TOSHIBA OCZ PX 240G 4369 PX 480G 4369 PX 960G 4369
	PLEXTOR PX 240G 4369 PX 480G 4369 PX 960G 4369
	SAMSUNG MZ76E128 128G 4342 MZ76E240 240G 4369 MZ76E480 480G 4369
	Sandisk SD500 128G 4342 SD500 240G 4369 SD500 480G 4369
	Seagate ST500 128G 4342 ST500 240G 4369 ST500 480G 4369
	Silicon Power SP110 128G 4342 SP110 240G 4369 SP110 480G 4369
	TEKISM TK110 128G 4342 TK110 240G 4369 TK110 480G 4369

PN61 PAGE 1


[pdf] Safety Datasheet

Vista Procedure QTC ASUS UE MINI BOOMBOX Line out Logitech Z906 EDIFIER S5 1MKII R151T
TRANSWIN T C1 HD720P CAMERA BLUELOVER T3200 C270 HD Microsoft PN61 Devices report
model dlcdnets asus pub Desktop MiniPC |||
PART C. Hardware Periphery Compatibility 1. Hard Drives 1.1. SATA SSD Type
SATA 6G SSD ADATA AMD ANACONDA APACER CORSAIR Crucial FUJITSU Intel
Kingston LITEON TOSHIBA OCZ PLEXTOR SAMSUNG Sandisk Seagate Silicon
Power TEKISM Model IS32B-16G ASU800SS-128G-3963 ASX950SS-240G-4256
SU900-256G-4271 AS...
lang:tl score:12 filesize: 315.79 K page_count: 13 document date: 2018-11-01



[pdf] Catalog

2023 vol 6 H1 H4 0110 ED MR4 R1280T A R1380DB BR S1000MKII kg Edifier Hecate ch
○ mm W catalog princeton co jp static images 202401 |||
1 USB 2 1_2_ https://www.princeton.co.jp/support/naming_service.html Vol.6 2024 T
E L : 03-6670-6848900120013001700 FAX : 03-3865-5025 https://
www.princeton.co.jp/support/contacts www.princeton.co.jp TEL03-5733-1730 FAX03-
5733-1731 TEL06-6203-8511FAX06-6203-8513 TEL052-203...
lang:nl score:11 filesize: 21.49 M page_count: 24 document date: 2024-01-11

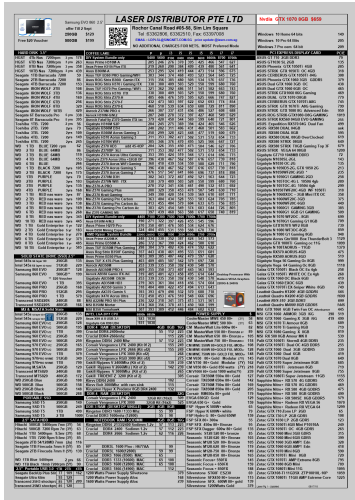

[pdf]

Laser Distributor Pte Ltd laser distributor pte ltd 4pro cdn c43ef |||
Samsung EVO 860 2.5 LASER DISTRIBUTOR PTE LTD Nvidia GTX 1070 8GB 659
offer Till 2 Sept 1 Rochor Canal Road #05-58, Sim Lim Square 250GB 129 Tel
:63362806, 63362510, Fax: 63397008 Windows 10 Home 64 bits 149 Free 20
Voucher 500GB 199 EMAIL : LDPLSL SINGNET.COM.SG price update laser.co...
lang:tl score:9 filesize: 1.6 M page_count: 6 document date: 2018-08-17