PrancyBt M99

PrancyBt M99 Trucker Bluetooth Headset User Manual

Model: M99

Introduction

Thank you for choosing the PrancyBt M99 Trucker Bluetooth Headset. This manual provides detailed instructions for setting up, operating, and maintaining your headset to ensure optimal performance and longevity. Please read this manual thoroughly before using the product.



Image: The PrancyBt M99 Trucker Bluetooth Headset, showcasing its ergonomic design and integrated microphone.

What's in the Box

Upon opening the package, please verify that all the following items are included:

- PrancyBt M99 Bluetooth Headset with Microphone
- USB-C Charging Cable
- User Manual (this document)

Setup Guide

1. Charging the Headset

Before first use, fully charge the headset. Connect the provided USB-C charging cable to the headset's charging port and the other end to a USB power source (e.g., computer USB port, wall adapter). The charging indicator light will show the charging status.

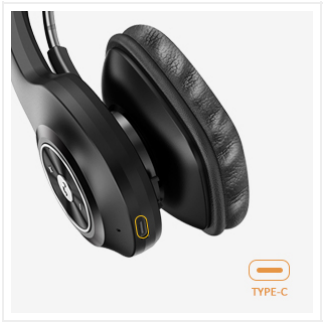


Image: Close-up of the headset's USB-C charging port, highlighted for easy identification.

Charging Time: Approximately 2-3 hours for a full charge.

2. Powering On/Off

To power on, press and hold the Multi-function Button until you hear a voice prompt or see the indicator light flash. To power off, press and hold the Multi-function Button again until the voice prompt indicates power off.

3. Bluetooth Pairing

1. Ensure the headset is powered off.
2. Press and hold the Multi-function Button for approximately 5-7 seconds until the indicator light flashes red and blue alternately, indicating pairing mode.
3. On your device (smartphone, laptop, tablet), enable Bluetooth and search for available devices.
4. Select "PrancyBt M99" from the list of found devices.
5. Once connected, the indicator light will turn solid blue or flash slowly, and you will hear a confirmation voice prompt.

4. Multipoint Connectivity

The PrancyBt M99 supports connecting to two Bluetooth devices simultaneously. This allows you to seamlessly switch audio between, for example, your phone and your laptop without re-pairing.



Image: A user demonstrating the seamless dual-device connection feature, using both a laptop and a smartphone with the headset.

To connect to a second device, first connect to the first device. Then, put the headset back into pairing mode and connect to the second device. The headset will remember both connections.

Operating Instructions

Call Management

- **Answer/End Call:** Press the Multi-function Button once.
- **Reject Call:** Press and hold the Multi-function Button for 2 seconds.
- **Redial Last Number:** Double-press the Multi-function Button.
- **Mute/Unmute Microphone:** Press the dedicated Mute Button on the microphone boom.



Image: A user wearing the headset, with a clear visual indicator pointing to the one-click mute button on the microphone boom.

Music Playback

- **Play/Pause:** Press the Multi-function Button once.
- **Next Track:** Press and hold the Volume Up button.
- **Previous Track:** Press and hold the Volume Down button.
- **Volume Up:** Press the Volume Up button.
- **Volume Down:** Press the Volume Down button.

Voice Assistant (Siri/Google Assistant)

Activate your device's voice assistant by triple-pressing the Multi-function Button. This allows for hands-free control of your phone's functions.

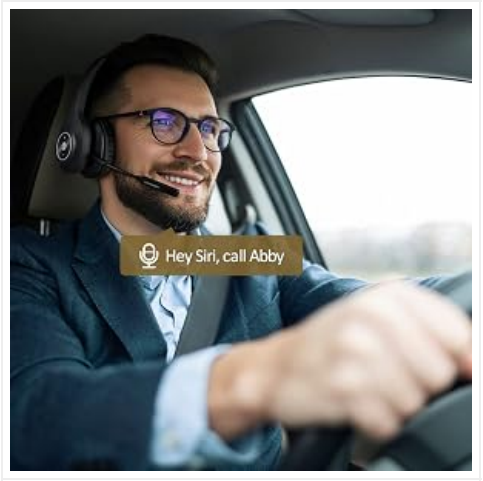


Image: A person driving, demonstrating the use of voice assistant (e.g., Siri) with the headset for hands-free commands.

Noise Cancellation

The headset features ENC dual microphones and CVC 8.0 noise cancellation technology, designed to block out up to 95% of background noise. This ensures clear communication even in noisy environments like a truck cabin or busy office.

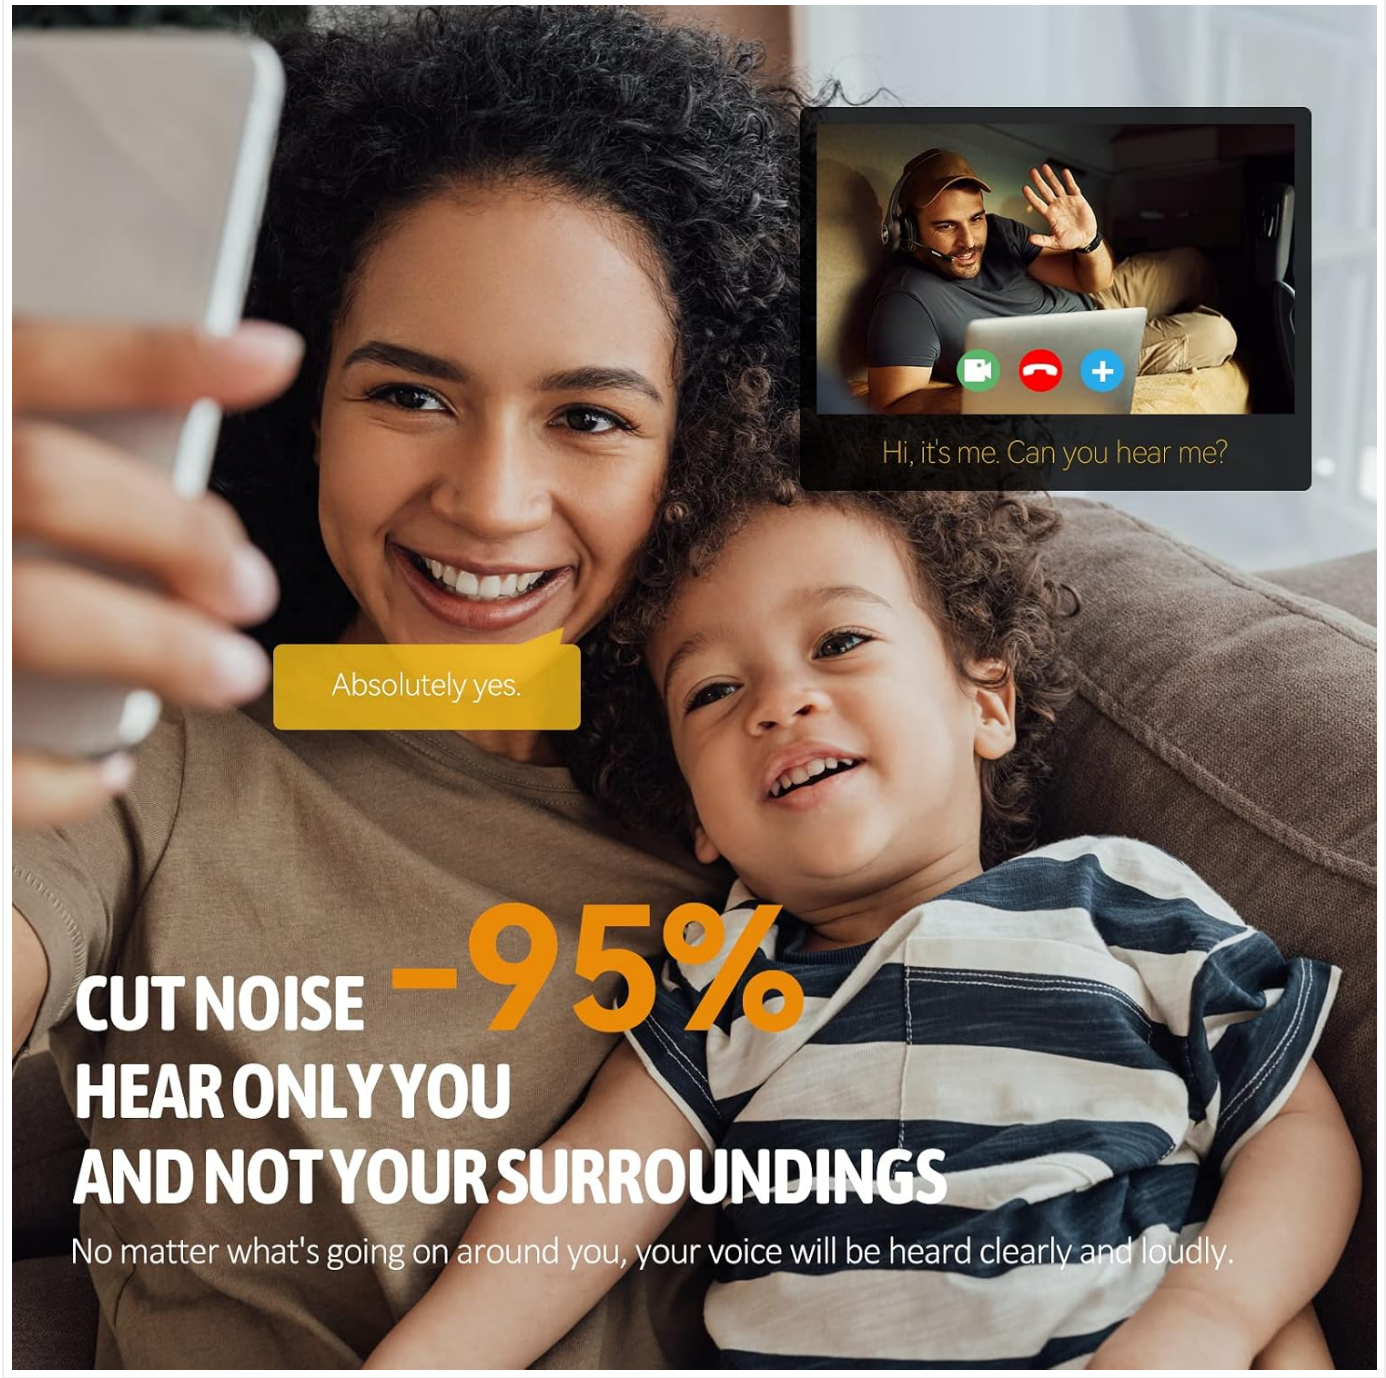


Image: A visual representation of the headset's 95% noise cancellation capability, showing a clear conversation despite surrounding noise.

Maintenance and Care

- **Cleaning:** Use a soft, dry cloth to clean the headset. Do not use abrasive cleaners or solvents.
- **Storage:** Store the headset in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. Charge the headset regularly, even if not in use for extended periods.
- **Microphone Adjustment:** The microphone boom is 300° rotatable. Adjust it gently to find the optimal position for clear voice capture.



Image: An illustration showing the 300-degree rotation capability of the headset's microphone boom.

Troubleshooting

Problem	Possible Cause	Solution
Headset won't turn on.	Low battery.	Charge the headset fully.
Cannot pair with device.	Headset not in pairing mode; Bluetooth off on device; device out of range.	Ensure headset is in pairing mode (flashing red/blue). Turn on Bluetooth on your device. Move device closer to headset (within 10 meters).
No sound or poor sound quality.	Volume too low; headset not selected as audio output; interference.	Increase volume on headset and device. Check device's audio settings to ensure headset is selected. Move away from other wireless devices.
Microphone not working.	Microphone muted; incorrect microphone selected on device.	Press the Mute Button to unmute. Check device's audio input settings. Ensure microphone is positioned correctly.
Intermittent connection.	Device too far; obstacles; low battery.	Move closer to the device. Reduce obstacles between headset and device. Charge the headset.

Product Specifications

Feature	Detail
Model Name	M99
Brand	PrancyBt
Connectivity Technology	Wireless (Bluetooth)
Bluetooth Version	5.1
Bluetooth Range	Up to 10 meters (33 feet)
Battery Life (Talk Time)	Up to 55 hours
Battery Life (Music Playback)	Up to 65 hours

Feature	Detail
Standby Time	Up to 90 days
Charging Time	Approximately 2-3 hours
Charging Port	USB-C
Noise Control	Active Noise Cancellation (ENC dual mics, CVC 8.0)
Microphone	300° Rotatable Boom Mic
Compatible Devices	Smartphones (iPhone, Android), Laptops, Desktops, Tablets (iPad), Computers
Material	Plastic, Protein Leather Earpads
Item Weight	55 Grams (1.94 ounces)
Control Method	Touch, Voice (Call Control)
Frequency Range	2.400 GHz to 2.4835 GHz

Warranty and Support

PrancyBt products are designed for reliability and performance. For warranty information and customer support, please refer to the contact details provided on the product packaging or the official PrancyBt website. Keep your purchase receipt for warranty claims.
As noted in customer reviews, PrancyBt offers responsive customer service. For any issues or inquiries, you may reach out to them directly.

© 2025 PrancyBt. All rights reserved.