



[Manuals.plus](#) /

> [KISSAIR](#) /

> KISSAIR 8,000 BTU Portable Air Conditioner (Model OL-A016FN05N3) User Manual

KISSAIR OL-A016FN05N3

KISSAIR 8,000 BTU Portable Air Conditioner User Manual

Model: OL-A016FN05N3

1. INTRODUCTION

Thank you for choosing the KISSAIR 8,000 BTU Portable Air Conditioner. This manual provides essential information for the safe and efficient operation, installation, and maintenance of your new appliance. Please read it thoroughly before use and keep it for future reference.



Image: KISSAIR 8,000 BTU Portable Air Conditioner shown with its exhaust hose, window kit, and remote control.

2. SAFETY INFORMATION

Always follow basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and injury to persons. This appliance is for indoor use only. Do not operate the unit with a damaged cord or plug. Ensure the unit is placed on a firm, level surface. Keep the air inlet and outlet free of obstructions. Never install the unit where it could be subject to direct sunlight, heat sources, or other products that produce heat.

3. PACKAGE CONTENTS

Verify that all items are present and undamaged:

- Portable Air Conditioner Unit
- User Manual
- Remote Control
- Exhaust Hose
- Hose Connector
- Window Kit Adapter
- Window Kit (adjustable panel)

- Water Pipe (for continuous drainage)



Image: A visual representation of all items included in the product package, such as the main unit, exhaust hose, window kit, remote control, and manuals.

4. PRODUCT FEATURES AND MODES

Your KISSAIR Portable Air Conditioner offers 4 versatile operating modes to ensure year-round comfort:

- **Cooling Mode:** Provides powerful cooling for spaces up to 350 square feet, with temperature settings from 61°F to 90°F.
- **Fan Mode:** Circulates air without cooling, ideal for ventilation.
- **Dehumidifying Mode:** Removes excess moisture from the air, improving comfort and preventing mold growth.
- **Sleep Mode:** Operates at a whisper-quiet 52 decibels, ensuring undisturbed rest.



Image: Visual representation of the four operating modes: Cool (61°F-95°F), Fan (2-Speed), Dehumidifier, and Sleep Mode (24H Timer/≤52 dB). The unit is designed for ease of movement with side handles and 360° swivel casters, allowing you to relocate it effortlessly.



Image: A person sleeping in a bedroom with the KISSAIR AC unit operating quietly, highlighting the less than 52dB noise level and 24-hour timer feature.

5. SETUP AND INSTALLATION

The KISSAIR Portable Air Conditioner comes with a comprehensive window installation kit designed to fit most horizontal or vertical windows. No special tools or drilling are required for basic setup.

5.1 Window Kit Installation

1. Connect the hose connector to one end of the exhaust hose.
2. Connect the window kit adapter to the other end of the exhaust hose.
3. Extend the adjustable window kit to the length of your window. Insert the window kit into the window opening.
4. Connect the exhaust hose assembly to the window kit adapter.
5. Attach the hose connector to the exhaust outlet of the AC unit.
6. Close your window to secure the kit in place.

Easy Installation

Both slide and hinged windows are applicable



Image: The portable AC unit installed with its exhaust hose in both a sliding window and a hinged window, demonstrating its adaptability.

Easy to Install – 2 Options

Follow the user manual to install the window exhaust kits, which are designed to fit most horizontal or vertical windows.

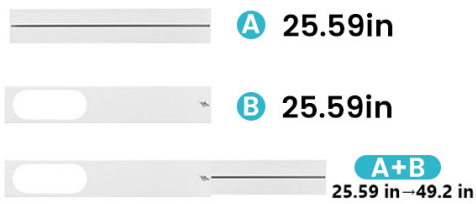


Image: Detailed diagrams illustrating two window installation options for the exhaust kit, suitable for horizontal and vertical windows, with measurements for adjustable panel lengths.

Video: KISSAIR Portable Air Conditioner setup demonstration, showing the assembly of the exhaust hose and window kit.

6. OPERATING INSTRUCTIONS

The unit can be operated via the control panel on top of the unit or using the included remote control.

6.1 Control Panel and Remote Control

The control panel features an LED display for temperature and mode indicators, along with touch buttons for Power, Mode, Speed, Temperature Up/Down, and Timer. The remote control offers the same functionalities for convenient operation from a distance.

Control Panel & Remote Control



Image: Close-up of the unit's control panel with LED display and touch buttons, alongside the remote control, indicating a range of up to 33 feet.

Dual Control Modes, Smart Flexibility

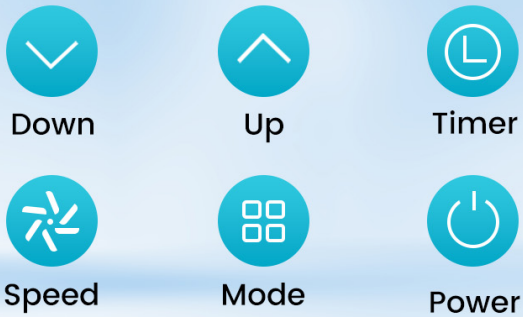


Image: Illustration of the dual control options (unit panel and remote) with icons for various functions like temperature adjustment, timer, speed, mode, and power.

6.2 Adjusting Settings

- **Power:** Press the Power button to turn the unit ON or OFF.
- **Mode:** Cycle through Cooling, Fan, Dehumidifying, and Sleep modes by pressing the Mode button.

- **Temperature:** Use the Up/Down arrows to set your desired temperature (61°F to 90°F).
- **Fan Speed:** Select High or Low fan speed.
- **Timer:** Set a 24-hour timer for automatic ON/OFF operation.
- **Louvers:** Manually adjust the horizontal louvers to direct airflow as desired.

7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your unit.

7.1 Filter Cleaning

The unit features a removable filter for easy cleaning. Regularly clean the filter to maintain air quality and cooling efficiency. To clean, gently pull out the filter from its slot, wash with mild detergent and water, then dry thoroughly before reinserting.



Image: A collage showcasing various user-friendly design elements, including the detachable filter for easy maintenance.

7.2 Water Drainage

In Dehumidifying mode or high humidity environments, the unit will collect water. The 'Water Full' indicator on the control panel will illuminate when the water reservoir is full, and the unit will stop operating. To drain, remove the drain plug at the bottom rear of the unit and allow water to flow into a suitable container. For continuous drainage, attach the provided water pipe to the drain outlet.

8. TROUBLESHOOTING

If the unit does not operate correctly, check the following common issues before contacting support:

- **Unit does not turn ON:** Ensure the power cord is securely plugged into a working electrical outlet. Check if the 'Water Full' indicator is on; if so, drain the water.
- **No cooling/weak cooling:** Check if the air filter is dirty and clean it if necessary. Ensure the exhaust hose is properly installed and not bent or blocked. Verify that windows and doors are closed to prevent warm air from entering the room.
- **Loud noise:** Ensure the unit is on a flat, stable surface. Check for any obstructions in the fan or air vents.

9. SPECIFICATIONS

Specification	Value
Brand	KISSAIR
Model Name	OL-A016FN05N3
Cooling Power	8,000 BTU
Coverage Area	Up to 350 sq. ft.
Operating Modes	Cool, Fan, Dehumidify, Sleep
Temperature Range	61°F to 90°F
Noise Level	52 Decibels

Item Weight	42.9 pounds
Product Dimensions	11.93 x 11.69 x 27.28 inches
Voltage	115V
Wattage	740 watts
Annual Energy Consumption	740 Kilowatt Hours Per Year

10. WARRANTY AND SUPPORT

For warranty information, technical support, or service inquiries, please refer to the contact details provided in the original product packaging or visit the KISSAIR official website. Keep your purchase receipt as proof of purchase.