

CREWORKS JX-010S

CREWORKS 1.8L Digital Ultrasonic Cleaning Machine User Manual

Brand: CREWORKS | Model: JX-010S

1. PRODUCT OVERVIEW

The CREWORKS 1.8L Digital Ultrasonic Cleaning Machine is designed for deep cleaning without harsh chemicals or radiation. It effectively removes rust, tarnish, cooked-on carbon, and other stains from various items such as jewelry, utensils, children's toys, glasses, and retainers. This compact sonic cleaner utilizes 60W of ultrasonic power to generate cavitation bubbles within its 0.5-gallon basin, ensuring thorough and professional cleaning of even small and intricate surfaces. Additionally, it features up to 100W of heating power for enhanced cleaning action. Constructed with 304 stainless steel for the inner basket and tank, this machine is built for durability and years of continual use. Non-skid rubber feet provide stability, while inset handles allow for easy portability. Two built-in fuses protect against power surges, ensuring greater longevity.



Image: The CREWORKS 1.8L Digital Ultrasonic Cleaning Machine, showcasing its compact stainless steel design and user-friendly digital interface.

2. WHAT'S IN THE BOX

- 1 x Sonic Cleaner
- 1 x Lid
- 1 x Mesh Basket
- 1 x Power Cord
- 1 x Instructions Manual

3. SETUP GUIDE

Before first use, ensure the unit is placed on a stable, flat surface away from direct heat or moisture. Connect the power cord

to a suitable electrical outlet. The unit is designed for easy setup and immediate use.

1. **Fill the Tank:** Open the lid and fill the stainless steel tank with water. For enhanced cleaning, a suitable cleanser can be added. Ensure the water level is between the MIN and MAX indicators.
2. **Place Items:** Carefully place the items to be cleaned into the included mesh basket. Lower the basket into the tank, ensuring items are fully submerged but not touching the bottom of the tank directly.
3. **Close the Lid:** Securely close the lid to minimize noise and prevent splashing during operation.



Image: Preparing items for cleaning by placing them into the mesh basket.

4. OPERATING INSTRUCTIONS

The intuitive digital control panel allows for precise adjustment of cleaning parameters.

1. **Power On:** Locate the power switch on the back of the unit and flip it to the 'ON' position. The digital display will illuminate.
2. **Set Temperature:** Use the 'TEMP' button and the up/down arrows to set the desired cleaning temperature. The temperature can be set between 20°C and 80°C (68°F and 176°F).

3. **Set Timer:** Use the 'TIME' button and the up/down arrows to set the cleaning duration. The timer can be set from 1 to 30 minutes.
4. **Start Cleaning:** Press the power button on the control panel to begin the ultrasonic cleaning cycle. The unit will emit a humming sound as it operates.
5. **Completion:** The unit will automatically stop once the set timer has elapsed. Carefully open the lid and remove the mesh basket with the cleaned items.

CONVENIENT & EFFICIENT

Easily adjust the time & temperature using the intuitive control panel



Temperature
Max. 140°F



Timer
0–30 min.

DIGITAL ULTRASONIC CLEANER



°C

SET

ACTUAL

ON



ON

MINUTES

SECONDS



TEMP



TIME

Image: Digital control panel for setting temperature and time.

HIGHLY THOROUGH

Clean Every Nook & Cranny with Powerful Cavitation

BEFORE

AFTER



60W

Ultrasonic Power



40 kHz

Ultrasonic Frequency



100W

Heating Power

Image: Visual demonstration of cleaning effectiveness.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your ultrasonic cleaner.

- **Empty and Clean Tank:** After each use, especially when using cleaning solutions, empty the tank and rinse it thoroughly with clean water. Wipe the interior and exterior with a soft, damp cloth.
- **Avoid Abrasives:** Do not use abrasive cleaners or scouring pads, as these can damage the stainless steel finish.
- **Storage:** Store the unit in a dry, cool place when not in use. Ensure the tank is completely dry before storage.
- **Fuse Check:** The unit is equipped with two built-in fuses for protection against power surges. If the unit fails to power on, check and replace the fuses if necessary (refer to a qualified technician if unsure).

6. TROUBLESHOOTING

If you encounter issues with your ultrasonic cleaner, try the following:

- **Unit Does Not Power On:** Ensure the power cord is securely plugged into both the unit and a working electrical outlet. Check the power switch on the back of the unit. Verify that the power outlet is functional.
- **No Ultrasonic Action (No Humming Sound):** Ensure the tank is filled with sufficient liquid. The unit requires liquid to transmit ultrasonic waves. Check if the timer is set and the start button has been pressed.
- **Poor Cleaning Results:** Ensure the water temperature is appropriate for the items being cleaned. Some items benefit from warmer water. Consider using a suitable ultrasonic cleaning solution instead of just water. Do not overload the basket; ensure items are not densely packed.
- **Overheating:** If the unit becomes excessively hot, unplug it immediately and allow it to cool down. Ensure proper ventilation around the unit.

7. SPECIFICATIONS

Feature	Detail
Brand	CREWORKS
Model Number	JX-010S
Product Dimensions	8.46 x 7.56 x 9.84 inches; 5.18 Pounds
Tank Volume	1.8L (0.5 Gallon)
Ultrasonic Power	60W
Heating Power	100W
Temperature Range	20°C to 80°C (68°F to 176°F)
Timer Range	1 to 30 minutes
Tank Material	304 Stainless Steel

8. WARRANTY AND SUPPORT

For specific warranty information and customer support, please refer to the documentation included with your product or visit the official CREWORKS brand store on Amazon. You can find more information and contact details at the [CREWORKS Store](#).

V20240827

[\[pdf\]](#) SAR Rating

MANUALE UTENTE DELLA PULITRICE A ULTRASUONI Zoe Gao manuale d uso del pulitore a ultrasuoni Uso corretto Usi sempre i prodotti CREWORKS solo come indicato nei manuali di accompagnamento La mancata osservanza delle istruzioni può provocare lesioni 91QQXCnxJ9L ref dp product quick view m media amazon images I |||



V20240827 MANUALE D USO DEL PULITORE A ULTRASUONI Legga attentamente prima dell uso Conservare per r ... 16,5 cm 17,5 cm Potenza di ingresso America del Nord / REGNO UNITO, UE E 220-240 V- 50 Hz AU **JX-010S** 1,9 qt. 0,5 galloni. 1,8 L 5,9 pollici 15 cm 5,3 pollici 3,9 pollici 6,9 pollici 13,5 cm... lang:it **score:33** filesize: 620.33 K page_count: 9 document date: 2024-11-18

[Manual de Usuario Limpiador Ultrasónico CREWORKS](#)

Manual de usuario completo para limpiadores ultrasónicos CREWORKS, que cubre operación, seguridad, especificaciones, lista de paquetes, diagramas, panel de control, operación, mantenimiento y solución de problemas.



lang:es **score:31** filesize: 520.81 K page_count: 14 document date: 2024-09-19

ULTRASCHALLREINIGUNGSGERÄT BENUTZERHANDBUCH



Lesen Sie das Handbuch vor der Benutzung sorgfältig durch und bewahren Sie es zum späteren Nachschlagen auf

[\[pdf\]](#)

ULTRASCHALLREINIGUNGSGE Ordnungsgemäße Verwendung Verwenden Sie das Produkt von CREWORKS immer nur gemäß den Anweisungen im beiliegenden Benutzerhandbuch A1iVWjyJgOL ref dp product quick view m media amazon images I |||

ULTRASCHALLREINIGUNGSGERT BENUTZERHANDBUCH Lesen Sie das Handbuch vor der Benutzung sorgfältig durch ... en Gegenstände NICHT direkt mit dem Tankboden in Berührung kommen. Technische Daten Modell JX-009S **JX-010S** JX-020S JX-031S JX-040S JX-060S JX-080S JX-100S Fassungsvermögen 1,2 L 1,8 L 2,8 L 5,9 L ...

lang:de **score:25** filesize: 1.18 M page_count: 8 document date: 2024-10-09



[\[pdf\]](#) SAR Rating

Manuale utente CREWORKS 1 2L Digital Ultrasonic Cleaner with Degas Mode and 7 Levels of Oscillation 60 W Tank 3 Modes 100 Heater Timer for Watches Glasses Home Use Amazon.it Industrial Scientific 91yRKLhFpgLm media amazon images | 91yRKLhFpgL ref dp product quick view ||| V20240827 Pulitore ad ultrasuoni Manuale dell'utente Legga attentamente prima dell'uso Conservare pe ... Lunghezza Larghezza JX-009S 1,2 qt. 0,3 galloni. 1,2 L 5,9 pollici 15 cm 5,3 pollici 13,5 cm **JX-010S** 1,9 qt. 0,5 galloni. 1,8 L 5,9 pollici 15 cm 5,3 pollici 13,5 cm Altezza 6,9 pollici ...
lang:it **score:25** filesize: 521.37 K page_count: 14 document date: 2024-09-19

08-000-0044-02

Ultrasonic Cleaner User Manual

Bilingual/Zweisprachig (EN/DE)



Read Carefully Before Use
Keep for Future Reference

[CREWORKS Ultrasonic Cleaner User Manual - Operation, Safety, and Specifications](#)

Comprehensive user manual for CREWORKS ultrasonic cleaners, covering operation, safety guidelines, specifications, maintenance, and disposal. Includes model details for JX series.
lang:en **score:20** filesize: 2.46 M page_count: 24 document date: 2025-09-23


Ultraschallreinigungsgerät Benutzerhandbuch



Lesen Sie das Handbuch vor der Benutzung sorgfältig durch
und bewahren Sie es zum späteren Nachschlagen auf

[\[pdf\]](#) User Manual


Ultraschallreinigungsgerät Optional Drücken Sie DEGAS um die Entgasung zu starten Die Anzeigelampe DGS leuchtet auf Hinweis wird automatisch nach 5 Minuten C1kS9glCD9Lm media amazon images | C1kS9glCD9L ref dp product quick view ||| Ultraschallreinigungsgert Benutzerhandbuch Lesen Sie das Handbuch vor der Benutzung sorgfältig durch ... enstnde NICHT direkt mit dem Tankboden in Berührung kommen. 2 Technische Daten 3 Modell JX-009S **JX-010S** Fassungsvermögen 1,2 L 1,8 L Tank Länge Breite 15 cm 13,5 cm 15 cm 13,5 cm Höhe 6,5 cm...
lang:de **score:19** filesize: 4.33 M page_count: 16 document date: 2024-09-13

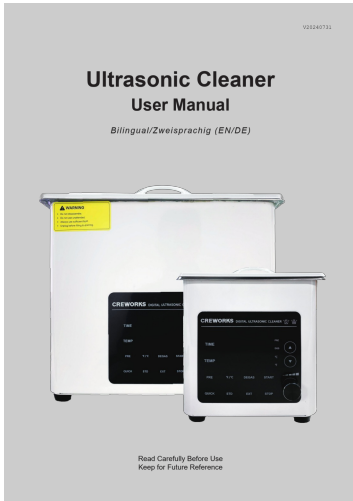

[CREWORKS Ultrasonic Cleaner User Manual - Operation, Safety, and Specifications](#)

Comprehensive user manual for the CREWORKS Ultrasonic Cleaner, covering safety instructions, specifications, operation procedures, maintenance, and troubleshooting for models JX-009S, JX-010S, JX-020S, and JX-031S.

lang:en score:18 filesize: 5.04 M page_count: 28 document date: 2024-07-31

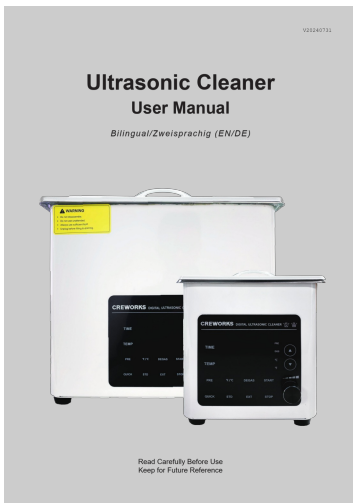

[\[pdf\] User Manual Instructions](#)

C1NmDWHzpLm media amazon images I C1NmDWHzpL |||

V20240731 Ultrasonic Cleaner User Manual Bilingual/Zweisprachig EN/DE Read Carefully Before Use Ke ... min. 100 W Max. Temp. 176F 80C Drain Valve Outer Diameter -- Net Weight 4.2 lb. 1.9 kg **JX-010S** 1.9 qt. 0.5 gal. 5.9 in. 5.3 in. 3.9 in. 6.9 in. 6.3 in. 8.3 in. 1.8 L 15 cm 13.5 cm 10 cm ...

lang:en score:18 filesize: 5.04 M page_count: 28 document date: 2024-07-31