

Kismile JC-18

Kismile 18L Beverage Refrigerator Cooler (Model JC-18) User Manual

Your guide to setup, operation, and maintenance

1. INTRODUCTION

This manual provides essential information for the safe and efficient operation of your Kismile 18L Beverage Refrigerator Cooler, Model JC-18. Please read all instructions carefully before use and retain this manual for future reference.

2. SAFETY INSTRUCTIONS

WARNING: ELECTRICAL REQUIREMENT - SHOCK HAZARD

- Ensure the unit is connected to a suitable power outlet (115 Volts, 15 Amps) with proper grounding. Do not use 2-prong adapters or cut off the third grounding prong.
- Avoid the use of extension cords. If an extension cord is necessary, use only a 3-wire extension cord that has a 3-blade grounding plug and a 3-slot outlet that will accept the plug. The marked rating of the extension cord must be equal to or greater than the electrical rating of the appliance.
- Do not install your Beverage Center in any location not properly insulated or heated (e.g., garage).
- Do not operate in ambient temperatures below 55°F Fahrenheit.
- Select a suitable location for the Beverage Center on a hard, even surface away from direct sunlight or heat sources (e.g., radiators, baseboard heaters, cooking appliances).
- Your Beverage Center is designed for freestanding installation only. It is not designed for built-in application.
- This unit is for indoor use only.
- Please ensure prompt discharge when the water in the drip tray reaches full.

3. PARTS AND FEATURES

Familiarize yourself with the components of your Kismile Beverage Refrigerator Cooler.

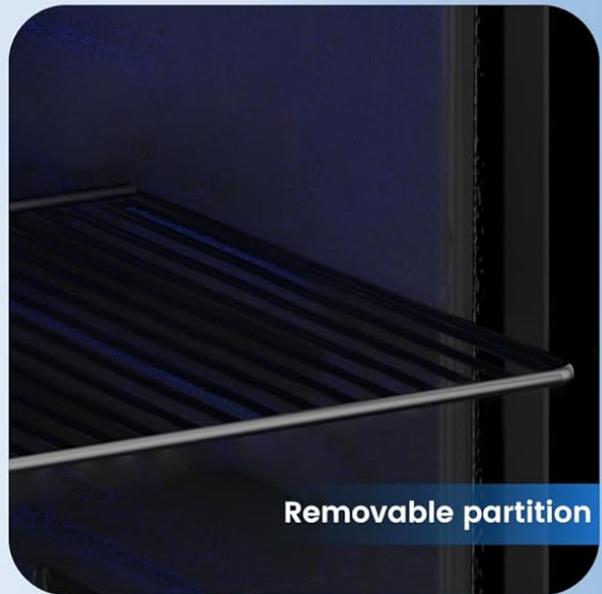


Figure 3.1: Kismile 18L Beverage Refrigerator Cooler interior showing capacity for various beverages.

- **Wire Shelf:** A removable metal shelf for organizing beverages.
- **Glass Door:** A sleek, transparent door allowing visibility of contents without opening, featuring an air-tight seal for temperature retention.
- **Legs:** Provides stable support for the unit.
- **Drip Tray:** Located at the rear of the unit, collects condensation and requires periodic emptying.
- **Thermostat Control:** Digital electronic control panel for adjusting the internal temperature.
- **Quiet Compressor:** Advanced cooling system designed for low noise and vibration-free operation.
- **LED Interior Lighting:** Soft blue LED lights illuminate the interior, making it easy to view contents.



Headlamp with LED



Removable partition

DETAILS SHOW



Super tight glass seal



Excellent Compressor

Figure 3.2: Key features including LED light, removable shelf, glass seal, and compressor.

4. SETUP

4.1 Unpacking

1. Remove all packaging materials, including the foam base and adhesive tape holding the beverage center accessories inside and outside.

2. Inspect and remove any remaining packing, tape, or protective materials before powering on the Beverage Center.

4.2 Placement and Air Circulation

To ensure that your Beverage Center works at maximum efficiency, it is designed for good air circulation. Install it in a location where there is proper air circulation and electrical connections.

- The following are recommended clearances around the beverage center:
 - Sides: 2" (50mm)
 - Top: 2" (50mm)
 - Back: 2" (50mm)
- Do not overfill your Beverage Center for proper cooling.

Note: If your Beverage Center has been tilted for any reason, wait 24 hours before plugging it in.

4.3 Initial Power-On

After placing the unit, plug it into a grounded electrical outlet. Allow the unit to cool for a minimum of two hours before loading beverages.

Your browser does not support the video tag.

Video 4.1: Official video demonstrating the Kismile 18L Beverage Refrigerator Cooler's features and use in a home setting.

5. OPERATING INSTRUCTIONS

5.1 Temperature Control

The Kismile 18L Beverage Refrigerator Cooler features a digital electronic temperature control system. The working temperature range is 40°F to 61°F (4°C to 16°C).

Mini Beverage Refrigerator

18L Capacity



6 Cans (355ml)
4 Bottles (750ml)



24 Cans (358ml)



Figure 5.1: Smart touch control panel for temperature adjustment.

- Use the **Up Arrow** button to increase the temperature.
- Use the **Down Arrow** button to decrease the temperature.
- The display will show the set temperature. The actual internal temperature may vary slightly depending on ambient conditions and how often the door is opened.

5.2 Loading Beverages

The unit has an 18L capacity, comfortably holding up to 24 standard-sized drink cans. The wire shelf is removable to accommodate taller bottles.



Figure 5.2: Recommended temperature ranges for various beverages.

- When first loading the beverage center to full capacity, allow it to cool to the desired temperature before adding all beverages.
- To remove or replace a full-width slide-out shelf, gently lift the shelf up and slide forward until the shelf has been completely removed. To replace the shelf, gently slide the shelf back into position.
- For optimal cooling, avoid blocking the internal air circulation vents.

5.3 LED Interior Light

The unit is equipped with a soft blue LED interior light. To turn the LED light on or off, long press the **Down Arrow** button for 3 seconds.

6. MAINTENANCE

6.1 Cleaning

- Always unplug the unit before cleaning.

- Clean the interior and exterior surfaces with a soft cloth and mild detergent. Avoid abrasive cleaners or solvents.
- The removable wire shelf can be washed with soap and water.

6.2 Drip Tray

The drip tray is located at the rear of the unit and collects condensation. Regularly check the drip tray and empty it when full to prevent overflow.

7. TROUBLESHOOTING

If you experience issues with your Kismile Beverage Refrigerator Cooler, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Unit does not operate	No power, unit unplugged, circuit breaker tripped.	Check power connection, reset circuit breaker.
Unit is not cold enough	Temperature setting too high, door not closed properly, excessive door openings, poor air circulation.	Adjust temperature, ensure door is sealed, reduce door openings, ensure proper clearances.
Excessive noise	Unit not level, objects touching the unit, normal compressor operation.	Adjust leveling feet, ensure no contact with other objects. Note that compressor makes operational sounds.
Condensation inside	High humidity, frequent door openings, drip tray full.	Ensure door is sealed, reduce door openings, empty drip tray.

8. SPECIFICATIONS

- **Brand:** Kismile
- **Model:** JC-18
- **Capacity:** 0.6 Cubic Feet (18 Liters)
- **Dimensions (D x W x H):** 14.88 x 11.02 x 16.73 inches
- **Item Weight:** 25 pounds
- **Temperature Range:** 40°F - 61°F (4°C - 16°C)
- **Voltage:** 115 Volts
- **Annual Energy Consumption:** 199 Kilowatt Hours
- **Installation Type:** Countertop
- **Defrost System:** Manual

- **Number of Doors:** 1
- **Special Features:** Compact, Low Noise, Portable, LED Light, Glass Door

Compact Beverage Cooler

The beverage fridge is compact,
takes up very little space and perfect use of space



Figure 8.1: Product dimensions for the Kismile 18L Beverage Refrigerator Cooler.

9. WARRANTY AND SUPPORT

For warranty information or customer support, please refer to the documentation included with your product or contact Kismile Direct customer service. Ensure you have your model number (JC-18) and purchase details

available.

© 2026 Kismile. All rights reserved.