

manuals.plus /

› [PPLEE](#) /

› [PPLEE 5-in-1 White Noise Machine User Manual](#)

PPLEE CR1002M

PPLEE 5-in-1 White Noise Machine User Manual

Model: CR1002M

INTRODUCTION

Thank you for choosing the PPLEE 5-in-1 White Noise Machine. This versatile device combines a white noise machine with 42 soothing sounds, a high-fidelity Bluetooth speaker, a dual digital alarm clock, a multi-color night light, and a convenient charging station. Designed to enhance your sleep quality, relaxation, and daily routine, this manual provides detailed instructions for setup, operation, and maintenance.



Figure 1: PPLEE 5-in-1 White Noise Machine Overview

WHAT'S IN THE BOX

- 1 x PPLEE Bluetooth Noise Machine Alarm Clock
- 1 x 5V 2A Power Adapter and Cord
- 1 x User Manual

SETUP GUIDE

1. Power Connection

Connect the provided 5V 2A power adapter to the DC jack on the back of the device and plug it into a standard

electrical outlet. The device will power on automatically.

2. Battery Installation (Memory Function)

For memory function and to retain time/alarm settings during power outages, install 1 CR2032 battery (not included) into the battery compartment on the bottom of the unit. This battery does not power the main functions of the device, only the memory backup.

3. Setting the Time

1. Press and hold the 'TIME SET' button (usually labeled 'HOUR' or 'MIN' with a clock icon) until the hour display flashes.
2. Use the 'HOUR' and 'MIN' buttons to adjust the time.
3. Press 'TIME SET' again to confirm and exit time setting mode.
4. To switch between 12-hour and 24-hour format, press the '12/24H' button.

OPERATING INSTRUCTIONS

Sound Machine Operation

The device offers 42 natural soothing sounds across four categories: white noise, fan sounds, lullabies, and nature sounds.

- **Selecting Sounds:** Press the 'SOUND' button (often represented by a music note or sound wave icon) to cycle through the available sound categories and individual sounds.
- **Volume Adjustment:** Use the 'VOL+' and 'VOL-' buttons to adjust the volume across 16 levels.
- **Sleep Timer:** Press the 'TIMER' button repeatedly to set an automatic shut-off timer for 15, 30, 60, 90, 120, 180, or 480 minutes. The display will show the selected time. To cancel the timer, press the 'TIMER' button until 'OFF' or no timer duration is displayed.

42 Soothing Sounds with Timer



Fan Sounds



White Noise



Lullabies Sounds



Natural Sounds



Figure 2: Sound Selection and Timer Functions

Bluetooth Speaker Operation

Connect your smartphone or tablet wirelessly to play your favorite audio.

- **Pairing:** Press the 'MODE' button until the Bluetooth icon appears on the display and starts flashing. On your device, enable Bluetooth and select 'CR1002M' (or similar) from the list of available devices. The icon will

become solid when paired.

- **Playing Audio:** Once paired, play audio from your connected device. Use the 'PREV', 'PLAY/PAUSE', and 'NEXT' buttons on the machine to control playback, or control directly from your device.

High Fidelity Bluetooth Speaker

Repeat "Mode" button until it's in Bluetooth mode



Figure 3: Bluetooth Connectivity

Alarm Clock Operation

The device features dual alarms with customizable sounds and snooze functionality.

- **Setting Alarms:** Press and hold 'ALARM 1' or 'ALARM 2' button until the alarm time flashes. Use 'HOUR' and 'MIN' buttons to set the desired alarm time. Press the alarm button again to confirm.
- **Selecting Alarm Sound:** After setting the time, press the alarm button again to select from 9 different alarm sounds.
- **Activating/Deactivating Alarm:** Press the 'ALARM 1' or 'ALARM 2' button briefly to toggle the alarm on or off. An alarm icon will appear on the display when active.
- **Snooze Function:** When the alarm sounds, press the large 'SNOOZE' button on top to temporarily silence it for 9 minutes.

Dual Alarm With 9 Natural Alarm Sounds



9 Wake-up
Sounds



0-16 levels
adjustable volume



5 Adjustable
Brightness

Figure 4: Dual Alarm Clock Settings

Night Light Operation

The integrated night light offers 7 colors and adjustable brightness.

- **Changing Colors:** Press the 'LIGHT' button (often represented by a light bulb icon) to cycle through the 7 solid colors and a gradient color mode.

- **Adjusting Brightness:** Press and hold the 'LIGHT' button to adjust the brightness level (5 levels available).



Figure 5: 7-Color Night Light with Brightness Control

Charging Functionality

The device includes a Type-C charging port for the unit itself and dual USB-A ports for charging external devices.

- **Device Charging:** The unit is powered via its Type-C port using the provided adapter.
- **External Device Charging:** Connect your smartphone, tablet, or other USB-powered devices to the dual USB-A ports on the back of the unit to charge them.

Type-C Charging & USB Phone Charger



Type-c port can charge the noise machine,
USB port to charge your phone, iPad, or other devices

Figure 6: Charging Ports for External Devices

Memory Function

The memory function ensures that your time and alarm settings are retained even if the main power is interrupted, thanks to the installed CR2032 battery.

Plug-In Machine with Memory Battery Backup



Figure 7: Memory Function with Battery Backup

- **Cleaning:** Wipe the device with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- **Storage:** Store the device in a cool, dry place when not in use for extended periods.
- **Battery Replacement:** Replace the CR2032 battery annually or if memory function fails.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on.	Power adapter not connected or faulty outlet.	Ensure adapter is securely plugged into device and a working outlet.
No sound or low volume.	Volume too low or incorrect sound selected.	Increase volume using 'VOL+' button. Cycle through sounds to ensure one is playing.
Bluetooth not connecting.	Device not in pairing mode or too far from source.	Ensure device is in Bluetooth pairing mode (flashing icon). Move source closer. Try re-pairing.
Alarm does not sound.	Alarm not activated or volume too low.	Check if alarm icon is displayed. Increase alarm volume. Verify alarm time is set correctly.
Time/settings reset after power outage.	CR2032 battery is dead or not installed.	Install or replace the CR2032 battery.

SPECIFICATIONS

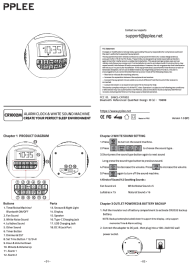
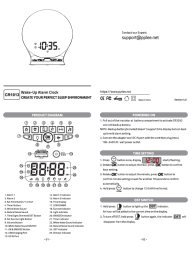
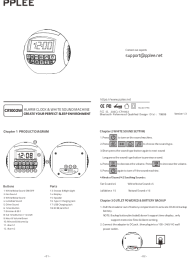
Feature	Detail
Product Dimensions	5.32 x 5.95 x 6.1 inches
Item Weight	1.39 pounds
Model Number	CR1002M
Color	White
Power Source	AC Powered (with CR2032 battery backup for memory)
Music Tracks	42 (White Noise, Fan, Lullabies, Nature Sounds)
Night Light Colors	7 Colors + Gradient
Volume Levels	16
Brightness Levels	5
Timers	15, 30, 60, 90, 120, 180, 480 minutes

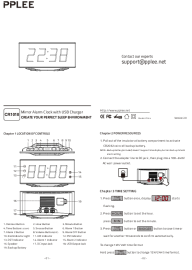
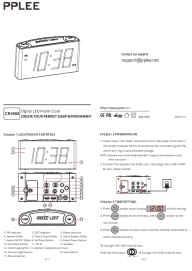
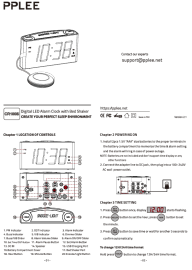
Feature	Detail
Alarm Sounds	9
Charging Ports	Dual USB-A

WARRANTY AND SUPPORT

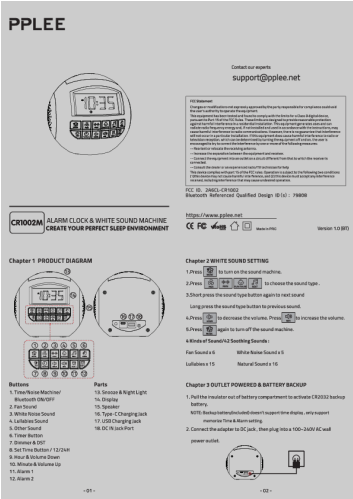
PPLEE products are designed for reliability and performance. For warranty information or technical support, please refer to the contact details provided with your purchase or visit the official PPLEE website. A digital version of this user manual is also available for download at <https://manuals.plus/m/f23b430e063d58de8cd25ce8d0ed17a6ff4bc5a117e3aca8867779d575e1b4e3>.

Related Documents - CR1002M

	<p>PPLEE CR1002M Alarm Clock & White Sound Machine User Manual</p> <p>User manual for the PPLEE CR1002M Alarm Clock & White Sound Machine. This guide details product features, setup, operation, and troubleshooting for creating a perfect sleep environment.</p>
	<p>PPLEE CR1013 Wake-Up Alarm Clock User Manual</p> <p>Comprehensive user manual for the PPLEE CR1013 Wake-Up Alarm Clock, detailing setup, alarm settings, sunrise simulation, night light, white noise functions, and USB charging.</p>
	<p>PPLEE CR1002W Alarm Clock & White Sound Machine User Manual</p> <p>User manual for the PPLEE CR1002W Alarm Clock & White Sound Machine, providing detailed instructions on its features, setup, and operation, including sound settings, alarms, time setting, and night light functions.</p>

	<p>PPLEE CR1018 Mirror Alarm Clock with USB Charger - User Manual</p> <p>Comprehensive user manual for the PPLEE CR1018 Mirror Alarm Clock with USB Charger. Learn how to set time, alarms, adjust brightness, use USB charging, and understand its features. Create your perfect sleep environment.</p>
	<p>PPLEE CR1008 Digital LED Alarm Clock User Manual</p> <p>Comprehensive user manual for the PPLEE CR1008 Digital LED Alarm Clock. This guide details setup, time and alarm setting, night light features, USB charging capabilities, DST adjustments, and warranty information provided by PPLEE and Yisong E-commerce Co.,Ltd.</p>
	<p>PPLEE CR1008i Digital LED Alarm Clock with Bed Shaker User Manual</p> <p>User manual for the PPLEE CR1008i Digital LED Alarm Clock with Bed Shaker, covering setup, operation, features, and warranty information.</p>

Documents - PPLEE – CR1002M



[PPLEE CR1002M Alarm Clock & White Sound Machine User Manual](#)

User manual for the PPLEE CR1002M Alarm Clock & White Sound Machine. This guide details product features, setup, operation, and troubleshooting for creating a perfect sleep environment.

lang: **score:15** filesize: 1.81 M page_count: 2 document date: 2022-12-20