



[Manuals.plus](#) /

› [Beaquicy](#) /

› [Beaquicy 330031 Range Burner Receptacle Kit Instruction Manual](#)

Beaquicy 330031

Beaquicy 330031 Range Burner Receptacle Kit Instruction Manual

Replacement for Whirlpool, Kenmore, and other Range/Stove Models

1. INTRODUCTION

This manual provides instructions for the installation and use of the Beaquicy 330031 Range Burner Receptacle Kit. This kit is designed to replace faulty burner receptacles in various electric ranges and cooktops, restoring proper heating function to your appliance. The kit includes components necessary for replacing up to four burner receptacles.



Image 1.1: Overview of the Beaquicy 330031 Range Burner Receptacle 4-Pack Kit.

2. PRODUCT COMPONENTS

Each 330031 Range Burner Receptacle Kit includes the following components:

- 4 x Plastic Receptacle Blocks
- 8 x High-Temperature Wire Leads
- 8 x Ceramic Wire Nuts
- 8 x Heat Shrink Insulators
- 8 x Metal Brackets (two different types are provided to match existing configurations)

PRODUCT DETAILS

4 Packs 330031 Surface Burner Kit included
8 x High temperature wire leads
8 x Heat shrink insulator
8 x Ceramic wire nuts
4 x Receptacle block
8 x Metal Bracket



1 No harmful chemicals



2 Made of durable materials



3 Fit like the original

Image 2.1: Detailed view of the components included in one 330031 kit.

3. COMPATIBILITY

The 330031 Range Burner Surface Element Receptacle is compatible with various range models from brands such as Admiral, Frigidaire, GE, Kenmore, Maytag, Roper, Tappan, and Whirlpool. It replaces part numbers including 3374, AP3075808, PS340571, EAP340571, PD00002360, and 814399.

Before ordering or installing, verify compatibility with your appliance's model number and the existing part. Refer to the images below for a list of compatible models.

COMPATIBLE MODELS-WHIRLPOOL /ROPER/ FRIGIDAIRE/TAPPAN

WHIRLPOOL	1346^0A	1355^0A	1525^3A	1765^0A	1885^3A	2101^2E	2126^0A						
	2141^1E	2204^2A	2224^1A	2233^1A	2244W2A	2265^0A	2275^0A						
	2323^0A	2336^0A	2347^0A	2354^3A	2374^2A	2382^2A	2406^3A						
	2413^0A	2424^1A	2453^9A	2492^0A	2733^0A	2872^0A	4RF315PXDWO						
	B4007B1	C3157^0	CEX200VLO	CEX210VWO	CEX310VLO	CEX630VWO	D5257^2						
	D7507^0	D9757^6	F5007W1	F5057^0	F5107W0	F5257^0	F5358^0						
	F5607^0	F5757^0	F5807^0	F7107W1	F7607W0	F8557^0	F9107^0						
	F9257^0	FEC330BLO	FEP210ENO	FEP310BLO	KECG260SAL1	KECM860TBCO	KECS100SAL3						
	KECS1040WH	KECS160SWHO	KECX260SWH2	KEDS100VAL1	KEDS200YBLO	KEES702SWBO	N3157^0						
	N9157^0	RC8100XAHO	RC8200XBH2	RC8300XKH	RC8400XABO	RC8536XTBO	RC8800XLH						
	RC8900XABO	RC8920XAHO	RC8950XRH7	RCK888	RCK986	RE953PXKTO	RE960PKKWO						
	RF0100XKWO	RF014PXRWO	RF3000XPWO	RF3010XENO	RF3020XDNO	RF303BXPWO	RF305PXDZO						
	RF306BXPWO	RF3100XPWO	RF3120XPWO	RF313PXPTO	RF3140XPNO	RF315PCYNO	RF3210XPWO						
	RF330PXYW1	RF336PXPWO	RF345PXPWO	RF350BXBWO	RF3600XPWO	RF363PXVT3	RF365BXPNO						
	RF367PXDWO	RF370PXDNO	RF375PXYW3	RF3850XVNO	RF390PXPWO	RF395PXXW2	RF398PXPWO						
	RFE3000W1	RGE8800H	RHE396PP	RHE6760P	RHM973PP0	RHM975PW	RJE320BW1						
	RJE330PWO	RJE345PWO	RJE390PW	RM955PXKWO	RM973BXPT1	RM978BXPWO	RM980PXYNO						
	RS3025XBNO	RS310PXEB1	RS313PXTT0	RS363BXTT0	RS373PXW3	RS385PCBNO	RS576PXL0						
	RS600BXK0	RS6100XKWO	RS660BXK0	RS6750XV1	RS675PXK0	RS676PXL0	RS8100XAW0						
	S7257^0	S9507W0	SEC350XW0	TER20WODWO	TER46WOWN2	TER50WODWO							
	ROPER	1346*0A	1347W0A	1355*0A	1355W3A	1395*0A	1395W3A	1456*0A					
		1456X1A	1525*1A	1765*0A	1885*0A	1885W3A	2101*0E	2101W2E					
		2126*0A	2144W0F	2176W0A	2204*0A	2216*00	2224*0A	2233*0A					
		2244*2A	2265*0A	2276*0A	2323W0A	2336W0A	2347W0A	2354W3A					
		2366W0A	2374W0A	2384W3A	2406*0A	2414W2A	2424*0A	2426*2A					
		2426W0A	2456X0A	2492*1A	2492L0A	2496*0A	2496*1	2496*2A					
		2496X0	2570B10	2733*0A	2765W0A	2843W0A	2872*0A	2893W0A					
FRIGIDAIRE	4811	4853	4881	4408D	4409A	4418B	4428B	4438B	4448B	4468E	4478B	4509A	4813A
	4819A		484360B		484440D		484447D		484560B		484567B		484640A
	4853A		4869A		4879A		4889A		4891A		4893-80B		4899A
	CFEF210CS7		CFEF2405LWD		CFEF3007LWC		CFEF3011TWA		CFEF3012PBE		CFEF3012TWB		CFEF3016LGB
	CFEF3016LWA		CFEF3016TSA		CFEF3016TWA		CFEF3046LSD		CWEF3007TWA		FFEF3000MWB		FFEF3003NWD
	FFEF3003RBB		FFEF3005MQB		FFEF3009PWB		FFEF3010LWC		FFEF3010TWA		FFEF3016LBB		
TAPPAN	13-2620-00-01		13-2620-23-01		13-2626-00-10		13-2626-08-10		13-2626-23-10				
	13-2626-57-10		13-2626-66-10		13-3028-00-02		13-3028-08-02		13-3028-23-02				
	13-3620-00-01		13-3620-23-01		13-3628-00-02								

Image 3.1: Compatible models for Whirlpool, Roper, and Tappan ranges.

COMPATIBLE MODELS-MAYTAG /KENMORE/ GE/ADMIRAL

MAYTAG	1058AH-W	1151WJ-30	15GA-1-GG	15GK-10	15GN-1-GG	15HA-10
	35HA-10XS-ON	35HA-2CLX-EC	35HA-2CX-ON	35HA-92DX-ON	35HA-92W-94	35HB-2CX-ON
	35HK-92LX-ON	35HN-10-NJ	35HN-10XS-MS	35HN-2CLX-ON	35HN-92KW-EV	35HN-92LX-ON
	35HN-92W-94	35HN-92XS-MS	35HY-2CLX-EC	35HY-2CW-DN	38HA-2CX-ON	38HN-42TXW
	45EG-3CLW	6551WRA	655AH-CVW	8610PS	87LS-1G	958AH-CZW
	968AF-C	A1500PRA	A8720PW	ACH100E	ACR100SS	ACR100W
	AEU-516	AKDE5E	AKES3060E	AKR2000K	AKR3001E	AKR3001LL
	AKR3001SS	AKR3001WW	AKR30E	AKR30K	AKR30WW	ARC700E
	ARR-20	ARR3100L	ARR3100W	ARR3601LL	ARR3601WW	ARR-401
	ARR610	ARR6200W	ARR6202L	ARR6220W	ARR623L	ARR624W
	ARR625L	ARR626W	ARR629L	ARR632E	ARR6400L	ARR6400W
	ARRS6550E	ARS635W	ARS636E	ASR303	B35HN-92W-EV	B38HN-42TVW-EV
	B38JA-2CXW-ON	BNEA3H9TZ	BNEW3H8TVEV	CAKDE5E	CARC700E	CARR589L
	CARR629W	CARR630L	CARR632E	CBE22AA0	CBE26DB0	CBE26FC0
	CC12HRE1	CC13E	CC13W	CC1EF	CC1WF	CCE406L
	CCU-514	CE1500PRA	CEA6C6CW	CEU-516	CEW3C6CV	CLE700
	CNE200	CSR6203W	D-150	DCI-512	EBE22AA	EBE22AAOCEH
	EBE26CBO	ED1-56A19	ED9-52A411R	ED9-71A539R	EG956A429	EG972W549
	EH4-33A9	EHA112	EHF30002W	EHN3892L	EHS2672W	EHS342
	EHS342-OF	EHT312	EHT3302W	EJA397	EJN3892W	EKD9-51A439
	ESD342	EST3102K	EST3992L	FDU-248-2D	FDU-248-2WW	FDU2492B
	FDU258	FET100	FET1201K	FET1322B	FET1402B	FET1402K
	FEU208	GAE26TC	GBE22GP	GCSE600	HCU-514	LCI-522
	LCLE700	N1500PRA	NEA2H0	NEHA86-1	NEW2H0	NEW3G1
	NEW3J8EV	S1151L-30	S35HA-92X-19	SBE22AA0	ZRRSC8050E	
	KENMORE	101936634	101967630	1033658710	1034407911	1034688610
1039187212		1039347810	1039348112	1039357242	1039357310	1039378110
1039647910		1039727440	1039857340	1039858010	1039877310	1039887914
1194698680		1196488010	1196508210	1199018710	1199028410	1199048210
1199068010		1199078410	1199088210	1199728310	3636204190	3639321191
3639324590		3639330193	3639354190	3644634090	6284338210	22311 (1988)
GE	22388L0	22388W0	24488L0	24488W0	24588B0	24588L0
	24588W0	24688B0	24688L0	24688W0		
ADMIRAL	1068FCZ	1068F-CZ	1151AL-30	1151WL-30		

Image 3.2: Compatible models for Maytag, Kenmore, GE, and Admiral ranges.

4. INSTALLATION INSTRUCTIONS

Safety Warning: Always disconnect power to your range or cooktop by unplugging it or turning off the circuit breaker before attempting any repairs or installation.

Tools required for installation typically include a wire stripper, a flat-head screwdriver, and a Phillips-head screwdriver. A heat gun or lighter may be used for the heat shrink insulators.

Preparation:

1. Ensure the appliance is completely disconnected from power.
2. Carefully remove the surface burner element from the cooktop.
3. Inspect the old terminal block and element for any signs of corrosion, arcing, or discoloration.
4. Clean the stove area around the burner opening to prevent future issues.

Step-by-Step Installation:



PULLING OUT THE OLD KNOB VERTICALLY



1

Turn the shell down into the clasp.



2

Build the receptacle block and attach it to your wiring harness.



3

Placing the heat shrink tubes over each of your wires.



4

After shrinking the receptacle, install it on the cooktop.

Image 4.1: Example of removing an old knob, often a preliminary step for accessing burner components.

4 Steps

To complete the installation

Unplug your burner or turn off the circuit breaker before installing 330031 range burner receptacle kit.

The replacement parts are made of durable and high quality materials and well tested by the manufacturer, the product quality is fully guaranteed for your safety.

Image 4.2: Visual guide for the four main installation steps.

1. **Step 1: Remove Old Receptacle.** Turn the shell of the old receptacle down into its clasp to detach it from the

cooktop. Disconnect the old wires.

2. **Step 2: Connect New Receptacle.** Attach the new receptacle block to your wiring harness using the provided high-temperature wire leads and ceramic wire nuts. Ensure connections are secure.
3. **Step 3: Apply Heat Shrink.** Place the heat shrink tubes over each of your wire connections. Apply heat with a heat gun or lighter until the tubes shrink tightly around the connections, providing insulation.
4. **Step 4: Install Receptacle.** After securing and insulating the wiring, install the new receptacle onto the cooktop using the appropriate metal bracket. Ensure it is firmly seated.

After installation, carefully re-install the burner element and restore power to the appliance. Test the burner for proper function.

5. TROUBLESHOOTING

If your range burner is not heating at all, or not heating properly, it is likely an issue with the terminal block (receptacle). The 330031 kit is designed to address these common symptoms:

- No heat from the burner element.
- Uneven heating across the burner element.
- Lack of sufficient heat output.
- Corroded or arcing end connections on the old receptacle.

If you experience these issues, replacing the burner receptacle with the 330031 kit is a common solution.

FIX SYMPTOMS



Excellent Performance

330031 Stove Burner Receptacle Kit is equivalent quality to the OEM Parts.

330031 Range Burner Socket Kit is made of durable high quality material and is well tested by the manufacturer. When your component doesn't heat up at all, or if it doesn't heat up properly, it's probably a problem with the terminal block, then you need to replace this part.



There's no heat



Uneven heating



Lack of calories



Image 5.1: Visual representation of symptoms indicating a faulty burner receptacle.

6. SPECIFICATIONS

Feature	Detail
Part Number	330031
Manufacturer	Beaquicy
Item Weight	10.4 ounces
Product Dimensions	7.3 x 7.3 x 0.8 inches (packaging)
Included Components	4 x plastic socket block, 8 x metal bracket, 8 x high temperature wire, 8 x wire connector, 8 x heat shrink insulator



PRODUCT SIZE

IMPORTANT NOTE: Please check the size of the product you need carefully before placing the order to avoid the wrong purchase caused by the size error.

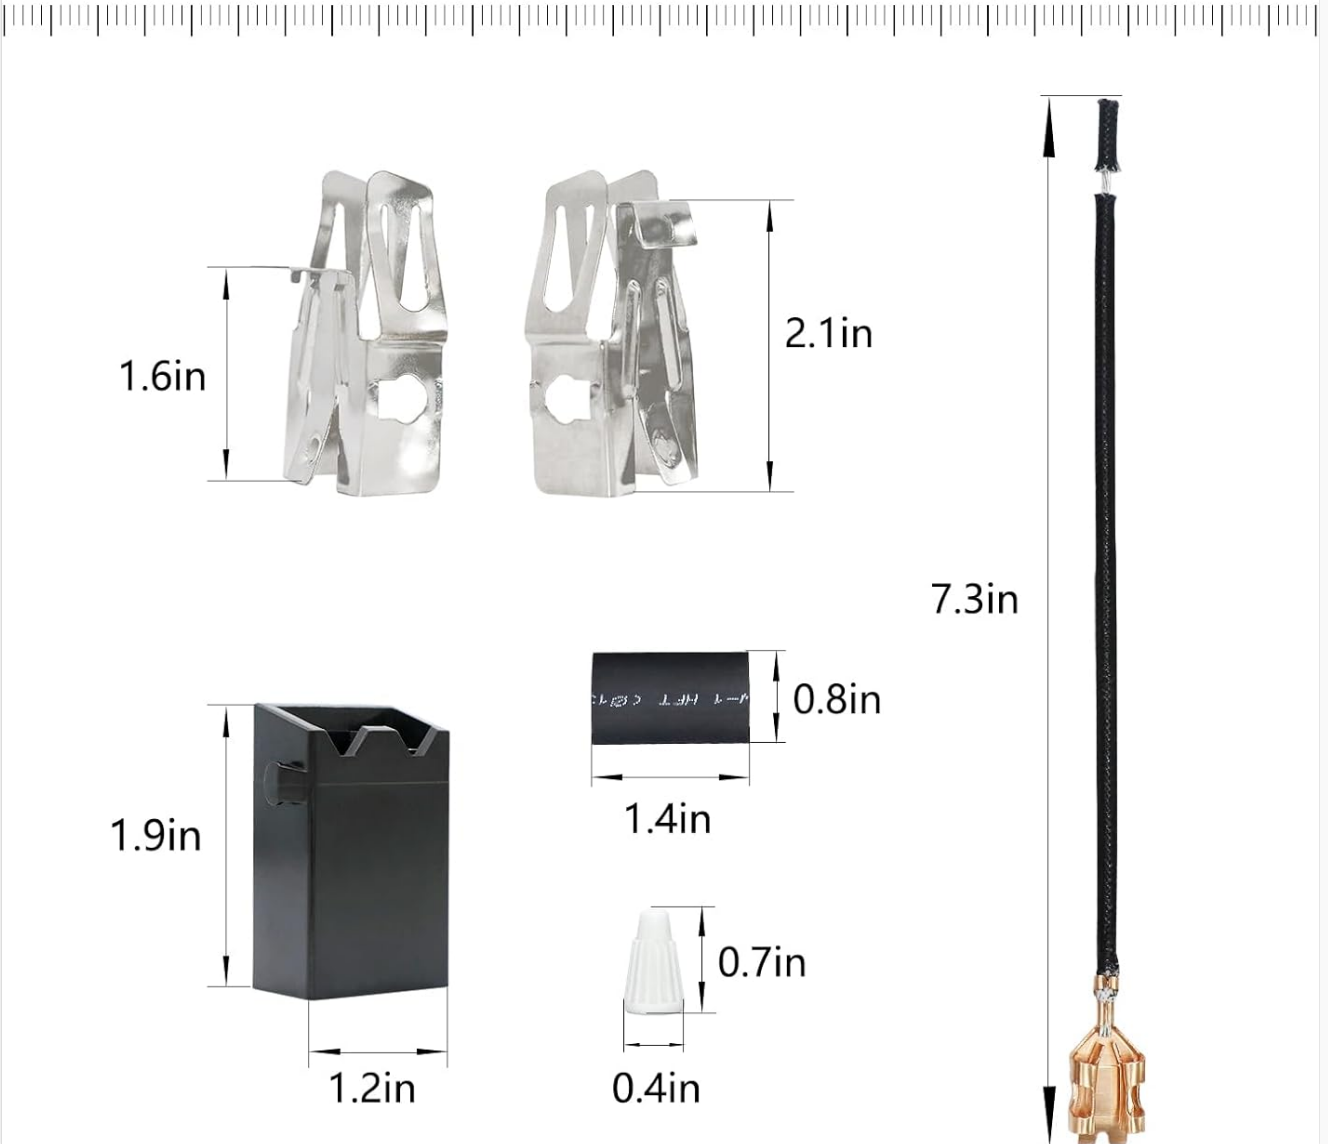


Image 6.1: Detailed dimensions of the kit components.

7. WARRANTY AND SUPPORT

The Beaquicy 330031 Range Burner Receptacle Kit includes a 365-day return and exchange policy. For any quality issues encountered during the warranty period, please contact customer service for assistance. Customer satisfaction is a priority.

