

CANMEIJIA CMJ-DD-8L-02

CANMEIJIA C-8-Light Gold Sputnik Chandelier Instruction Manual

Model: CMJ-DD-8L-02

1. PRODUCT OVERVIEW

The CANMEIJIA C-8-Light Gold Sputnik Chandelier is a modern ceiling light fixture designed to enhance the aesthetic of various indoor spaces. Featuring a minimalist design with eight adjustable arms, this fixture accommodates E26 medium base bulbs (not included) and offers flexibility in lighting arrangement.

Key Features:

- **Minimalist Design:** Eight linear arms arranged in a Sputnik style, providing a modern and open aesthetic.
- **Adjustable Arms:** Light fixture arms can be rotated 360 degrees horizontally, allowing for customized lighting angles.
- **E26 Standard Sockets:** Requires 8 x E26 medium base bulbs (Max 60W each, bulbs not included). Compatible with dimmable bulbs for adjustable ambiance.
- **Durable Construction:** Made of high-quality metal with a well-rubbed anti-rusty finish for longevity.
- **Wide Application:** Suitable for various rooms including bedrooms, dining rooms, living rooms, hallways, and entryways.

WIDE APPLICATION



Living Room



Bedroom



Kitchen



Dinning Room



Hallway



Image: The CANMEIJIA C-8-Light Gold Sputnik Chandelier installed in a living room, bedroom, dining room, kitchen, and hallway, demonstrating its versatile application in different home environments.



Image: Detailed view of the chandelier's components, highlighting the quality metal primer, 180-degree rotating solid joints, gold montage, and E26 base sockets.

2. SAFETY INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. Disconnect power at the circuit breaker or fuse box before installation or servicing. Improper installation can result in electric shock or fire.

- Read all instructions carefully before beginning installation.
- Ensure the electrical supply is disconnected before handling the fixture.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code (NEC).
- If you are unsure about wiring, consult a qualified electrician.
- Do not exceed the maximum wattage of 60W per bulb.
- Use only E26 medium base bulbs.

3. WHAT'S IN THE BOX

Your CANMEIJIA C-8-Light Gold Sputnik Chandelier package includes the following components:

- Chandelier frame with 8 arms
- Mounting plate
- Hardware pack (screws, wire nuts, washers)
- Instruction manual

Note: Light bulbs are NOT included and must be purchased separately.

4. SETUP AND INSTALLATION

Follow these steps for safe and proper installation of your chandelier. It is recommended to have two people for installation.

Installation Steps:

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Remove the old fixture if applicable.
2. **Separate Mounting Plate:** Unscrew the two screw nuts to separate the mounting plate from the fixture.
3. **Assemble Arms:** Carefully thread the wires through the arms and secure them to the main body. The arms can be adjusted to your desired configuration.
4. **Connect Wiring:** Connect the fixture's wires to the junction box wires. Connect like-colored wires (black to black, white to white) using wire nuts. Connect the copper ground wire from the fixture to the ground wire from the junction box.
5. **Mount Fixture:** Secure the mounting plate to the ceiling junction box. Carefully push the fixture onto the mounting plate, aligning the screws, and secure it with the screw nuts.
6. **Install Bulbs:** Screw the E26 medium base light bulbs (not included) into each socket.
7. **Restore Power:** Turn the power back on at the circuit breaker.

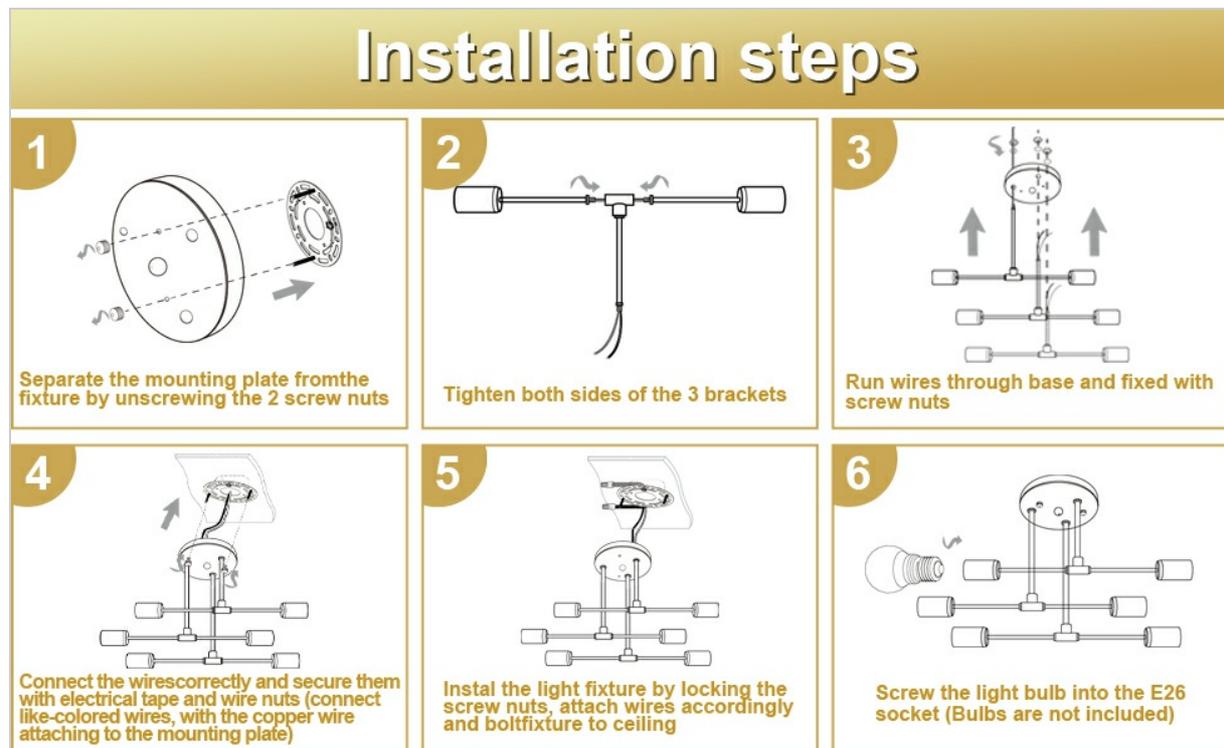


Image: Step-by-step visual guide for installing the chandelier, from separating the mounting plate to screwing in the light bulbs.



Image: A person easily screwing a light bulb into one of the chandelier's E26 sockets, demonstrating the final step of bulb installation.


Your browser does not support the video tag.

Video: An official seller video demonstrating the assembly and installation process of the 8-light Sputnik chandelier, showcasing its features and ease of setup.

5. OPERATING INSTRUCTIONS

Once installed and powered, your CANMEIJIA Sputnik Chandelier is ready for use.

- **Power On/Off:** Use your wall switch to turn the light fixture on or off.
- **Bulb Selection:** Choose E26 medium base bulbs (Max 60W each) that suit your desired brightness and color temperature (e.g., 2700K Warm White, 4000K Natural White, 5000K Daylight).
- **Dimmable Feature:** If using dimmable bulbs and a compatible dimmer switch (not included), you can adjust the light intensity to create different atmospheres.
- **Adjusting Arms:** The arms can be manually rotated 360 degrees to direct light as needed. Ensure power is off when making significant adjustments to avoid accidental contact with electrical components.

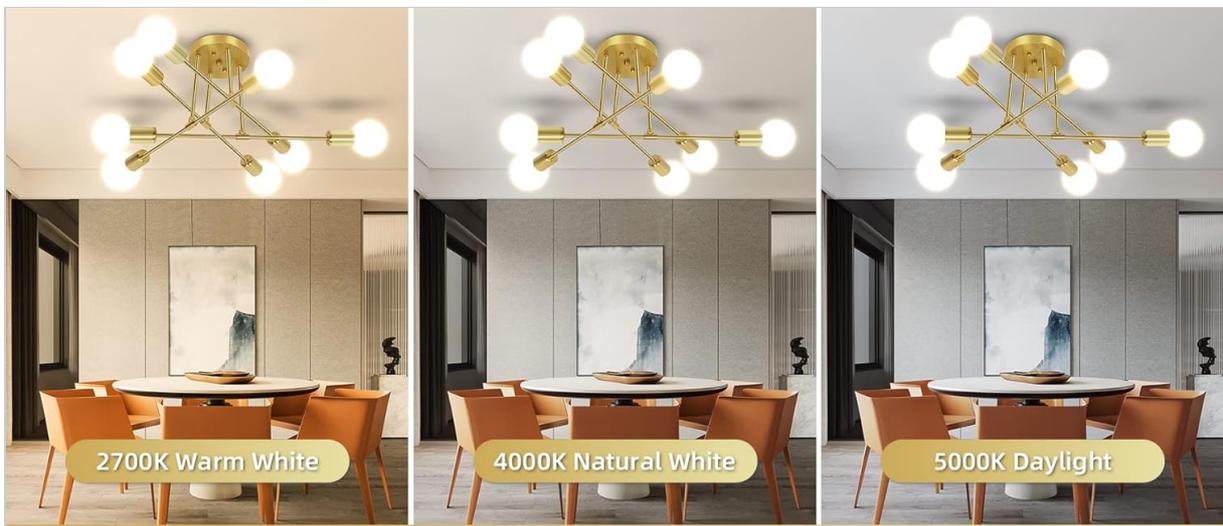

TURN ON/OFF THE LIGHTS

CREAT DIFFERENT ATMOSPHERE IN YOUR HOME



Image: The chandelier illuminated with 2700K Warm White, 4000K Natural White, and 5000K Daylight bulbs, illustrating how different bulb types can create varied room atmospheres.

6. MAINTENANCE

Regular maintenance helps ensure the longevity and optimal performance of your chandelier.

- **Cleaning:** Turn off power before cleaning. Use a soft, dry cloth to wipe the fixture. Avoid abrasive cleaners or solvents that may damage the finish.
- **Bulb Replacement:** Always turn off power before replacing bulbs. Allow bulbs to cool completely before touching.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

7. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Light does not turn on	<ol style="list-style-type: none"> 1. Power is off 2. Loose wiring 3. Faulty bulb 	<ol style="list-style-type: none"> 1. Check circuit breaker/wall switch 2. Verify all wire connections are secure (ensure power is off) 3. Replace bulb with a new one
Flickering lights	<ol style="list-style-type: none"> 1. Loose bulb 2. Incompatible dimmer switch/bulbs 3. Loose wiring 	<ol style="list-style-type: none"> 1. Tighten bulbs 2. Ensure dimmer and bulbs are compatible 3. Check wiring connections (ensure power is off)
Fixture is unstable	Loose mounting hardware	Tighten mounting screws and nuts securely

8. SPECIFICATIONS

Attribute	Detail
Brand	CANMEIJIA
Model Name	chandelier
Item Model Number	CMJ-DD-8L-02
Color	Gold
Material	Iron
Style	Modern
Light Fixture Form	Chandelier
Product Dimensions	5.11"L x 5.11"W x 9.8"H
Item Weight	2.42 Pounds
Power Source	Corded Electric
Installation Type	Semi Flush Mount
Special Feature	Dimmable
Light Source Type	Screw-type (E26)
Number of Light Sources	8
Voltage	120 Volts
Wattage	480 watts (Max total)
Bulb Base	E26
Assembly Required	Yes

PRODUCT DIMENSIONS



E26 BASE RECOMMENDED BULBS

(BULBS NOT INCLUDED)



CANMEIJIA

- 💡 Base Type: Standard E26 Socket
- ⚡ Working Voltage: AC85-265V,50/60Hz
- 📏 Dimensions: 25.51 x 9.44 x 5.9 inches

✔ Dimmable ✔ Non-Dimmable

Image: A diagram illustrating the product dimensions (25.51 inches width, 9.44 inches height, 5.9 inches canopy diameter) and recommended E26 base bulbs for the CANMEIJIA chandelier.

9. WARRANTY AND SUPPORT

The CANMEIJIA C-8-Light Gold Sputnik Chandelier comes with a Limited Warranty. Please refer to the product packaging or contact customer support for specific warranty details and duration.

Customer Support:

For any questions, technical assistance, or warranty claims, please contact CANMEIJIA customer service through the retailer's platform or visit the official CANMEIJIA store online.

We are committed to providing high-quality products and support to ensure your satisfaction.