

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [CANMEIJIA](#) /

› [CANMEIJIA Wall Sconce CMJ-BD-001 Instruction Manual](#)

CANMEIJIA CMJ-BD-001

CANMEIJIA Wall Sconce Instruction Manual

Model: CMJ-BD-001 | Brand: CANMEIJIA

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your CANMEIJIA Wall Sconce. Please read this manual thoroughly before installation and retain it for future reference. This modern wall sconce is designed to provide ambient lighting in various indoor settings such as bedrooms, living rooms, bathrooms, kitchens, hallways, and corridors. It features a matte black finish, a clear glass shade, and an E26 standard socket.



Image 1.1: CANMEIJIA Wall Sconce, showcasing its modern design with a clear glass shade and matte black finish.

2. SAFETY INFORMATION

- **WARNING:** To avoid the risk of electric shock, always disconnect power at the main circuit breaker or fuse box before beginning installation or performing any maintenance.
- All electrical connections must be in accordance with local and National Electrical Code (NEC) standards. If you are unfamiliar with proper electrical wiring connections, consult a qualified electrician.
- Ensure the mounting surface is structurally sound and can support the weight of the fixture.
- Do not exceed the maximum wattage specified for the bulb (Max 60W for E26 socket).
- Handle glass components with care to prevent breakage.
- This fixture is intended for indoor use only.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Lamp Body (with E26 socket)

- Clear Glass Lampshade
- Mounting Plate / Crossbar
- Mounting Hardware (screws, wire nuts, washers)
- Locking Ring



Image 3.1: Exploded view of the wall sconce components, showing the lamp body, glass lampshade, mounting plate, and tool kit.

4. PRODUCT FEATURES

- **Modern Design:** Matte black finish with a clear glass shade for a contemporary aesthetic.
- **Universal Application:** Suitable for various indoor spaces including bedrooms, bathrooms, kitchens, and hallways.
- **Easy Installation:** Designed for straightforward mounting with included hardware. Can be mounted with the shade facing upwards or downwards.
- **E26 Standard Socket:** Compatible with E26 medium base bulbs (Max 60W, bulbs not included).
- **Dimmable:** Fully dimmable when used with a compatible dimmer bulb and dimmer switch (not included).

- **Durable Construction:** Made with iron and a matte black finish to resist rust and ensure longevity.



Image 4.1: Visual representation of key features, including the universal mounting plate, modern glass shade, E26 bulb base, and anti-rust matte black finish.

5. SPECIFICATIONS

Attribute	Value
Brand	CANMEIJIA
Model Number	CMJ-BD-001
Color	Black Clear
Material	Iron, Glass
Style	Modern
Light Fixture Form	Sconce

Product Dimensions	5.9"L x 9.44"W x 7.87"H (approximate)
Item Weight	1.7 Pounds (0.77 Kilograms)
Specific Uses	Indoor use only
Power Source	AC/DC
Installation Type	Wall Mount
Special Feature	Dimmable (with compatible bulb/switch)
Light Source Type	LED or Halogen (Bulb not included)
Finish Type	Matte Black
Shade Material	Glass
Number of Light Sources	1
Voltage	120 Volts
Wattage	Max 60 watts
Bulb Base	E26
Brightness	Up to 800 lumens (bulb dependent)

PRODUCT DIMENSIONS



E26 BASE

MAX 60W

(Bulbs are not included)



Image 5.1: Product dimensions for planning installation space.

6. INSTALLATION INSTRUCTIONS

Before You Begin: Ensure power is turned off at the circuit breaker. Gather necessary tools (screwdriver, wire strippers, electrical tape, safety glasses).

- 1. Prepare the Mounting Plate:** Separate the mounting plate from the fixture by unscrewing the two screw nuts. Attach the mounting plate to your junction box using the provided screws. Ensure it is securely fastened.
- 2. Wire Connections:** Connect the fixture's wires to your household wiring. Connect the black wire (live) from the fixture to the black wire from the junction box using a wire nut. Connect the white wire (neutral) from the fixture to the white wire from the junction box using a wire nut. Connect the ground wire (bare copper or green) from the fixture to the ground wire from the junction box and to the mounting plate's ground screw. Ensure all connections are secure.
- 3. Mount the Fixture:** Carefully align the fixture's base with the screws on the mounting plate. Secure the fixture to the mounting plate using the two screw nuts.
- 4. Install the Glass Lampshade:** Gently place the clear glass lampshade over the bulb socket. Secure it in place with the locking ring by screwing it onto the socket.
- 5. Install the Bulb:** Screw an E26 medium base bulb (Max 60W, not included) into the socket.

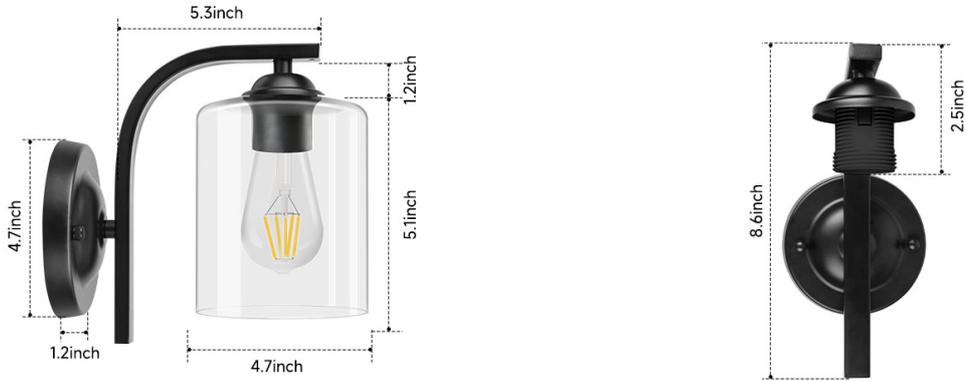


Image 6.1: Detailed installation method diagrams.

Video 6.2: Official product video demonstrating the wall light fixture with clear glass shade, including assembly and installation overview.

7. OPERATING INSTRUCTIONS

Once installed and a compatible E26 bulb is in place, restore power at the circuit breaker. Operate the light fixture using your wall switch. If a dimmable bulb and compatible dimmer switch are used, you can adjust the light intensity to your preference.



Note: Measurements are taken manually and may have slight variations

Image 7.1: Illustration of dimmable functionality and color temperature options with compatible bulbs.

8. MAINTENANCE

- **Cleaning:** To clean the fixture, turn off the power and allow it to cool. Wipe the metal parts with a soft, dry cloth. For the glass shade, use a mild glass cleaner and a soft cloth. Avoid abrasive cleaners or solvents that may damage the finish.
- **Bulb Replacement:** Ensure power is off before replacing the bulb. Allow the old bulb to cool completely. Unscrew the locking ring, remove the glass shade, then carefully unscrew the old bulb and replace it with a new E26 medium base bulb (Max 60W). Reattach the glass shade and locking ring.

9. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	<ol style="list-style-type: none"> 1. Power is off 2. Loose wire connection 3. Faulty bulb 	<ol style="list-style-type: none"> 1. Check circuit breaker/wall switch 2. Verify all wire connections are secure (power off first) 3. Replace bulb with a new one
Light flickers	<ol style="list-style-type: none"> 1. Loose bulb 2. Incompatible dimmer switch/bulb 3. Loose wire connection 	<ol style="list-style-type: none"> 1. Tighten bulb 2. Ensure dimmer and bulb are compatible 3. Check wire connections (power off first)
Glass shade is loose	Locking ring not tightened	Gently tighten the locking ring

10. WARRANTY AND SUPPORT

For warranty information or technical support, please contact CANMEIJIA customer service. Keep your purchase receipt as proof of purchase. Contact details can typically be found on the product packaging or the manufacturer's official website.

