

[Manuals.plus](#) /

› [FEELSO](#) /

› FEELSO Kitchen Faucet FL2 Instruction Manual

FEELSO FL2

FEELSO Kitchen Faucet with Pull Down Sprayer

Model: FL2 - Brushed Nickel Finish

INTRODUCTION

Thank you for choosing the FEELSO Kitchen Faucet with Pull Down Sprayer. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new faucet. Please read this manual thoroughly before installation and keep it for future reference.

SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or repair work.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- If you are unsure about any part of the installation process, it is recommended to consult a qualified plumber.
- Ensure all connections are secure to prevent leaks. Do not overtighten.
- This faucet is designed for domestic kitchen use. Do not use it for purposes other than its intended use.

PACKAGE CONTENTS

Carefully unpack your new faucet and ensure all parts are present. If any parts are missing or damaged, please contact customer support.

- Kitchen Faucet Assembly
- Deck Plate (for 3-hole installation)
- Black Plastic Plug
- Mini Screwdriver
- Hot and Cold Water Supply Hoses (3/8" connections)
- Mounting Hardware
- Instruction Manual

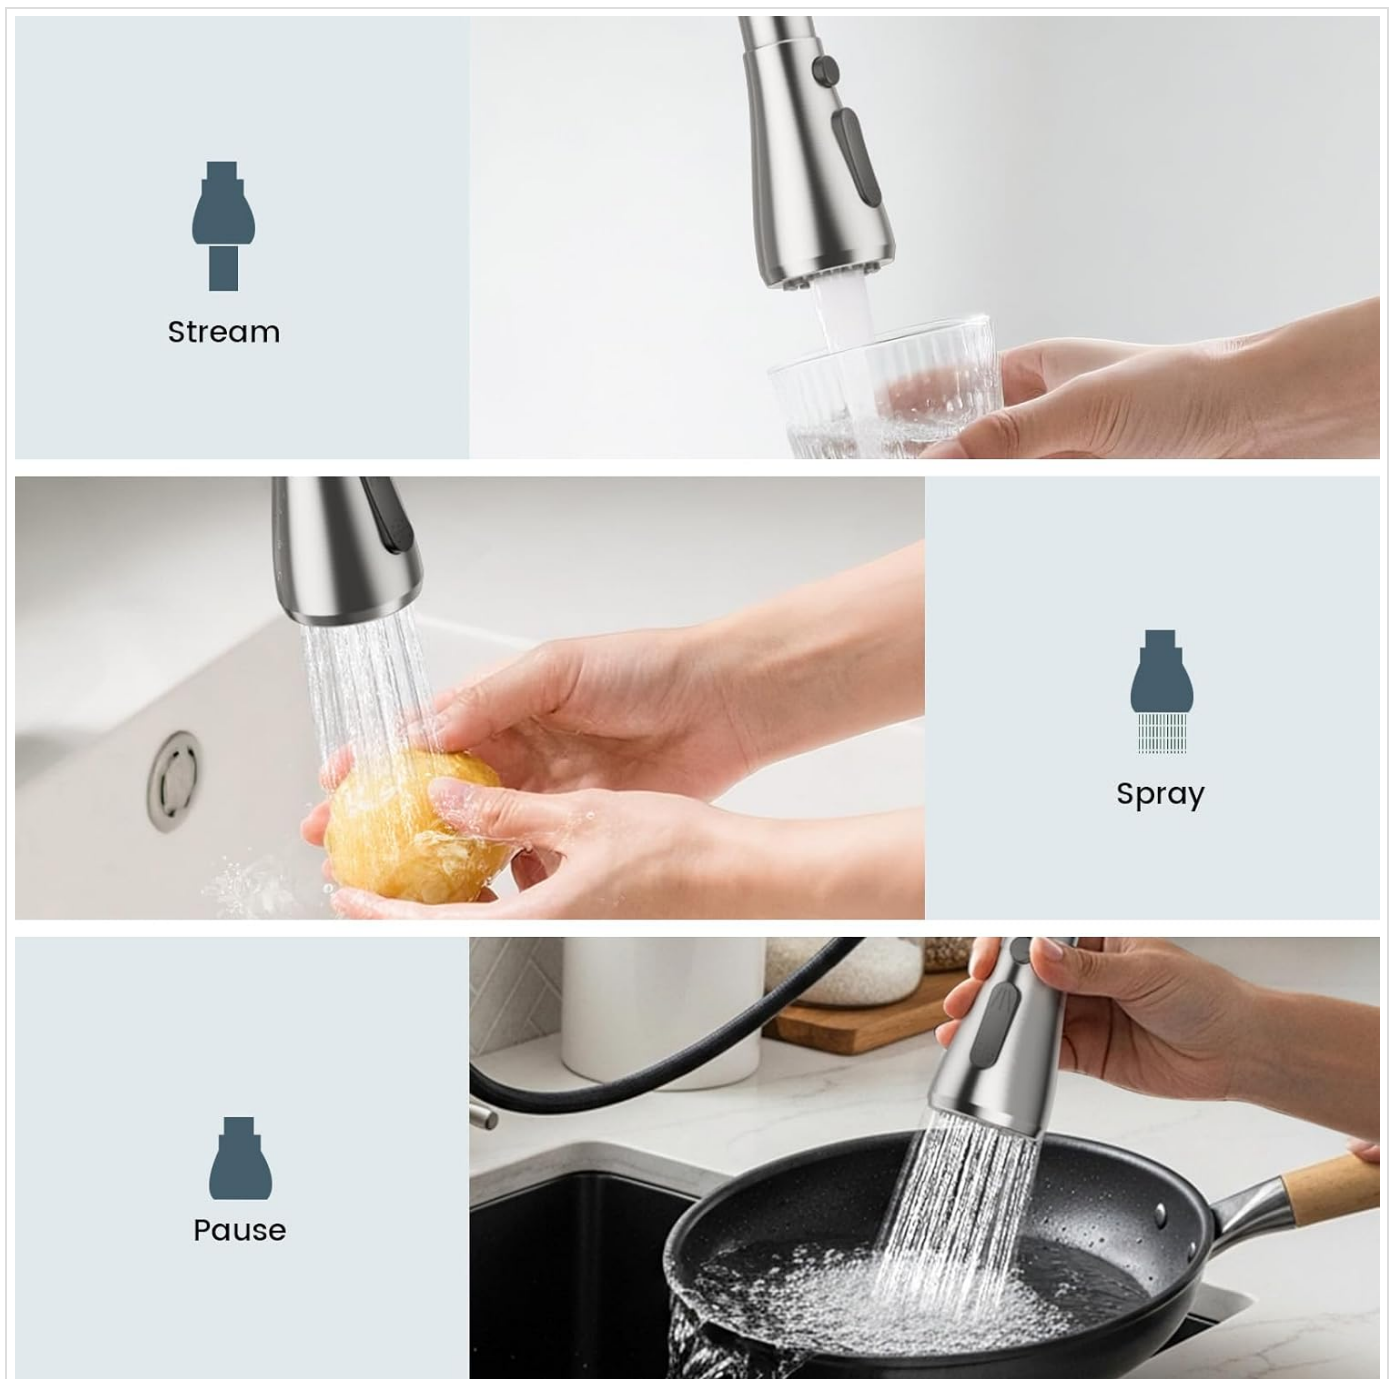


Image: All components included in the FEELSO Kitchen Faucet package.

SETUP AND INSTALLATION

The FEELSO Kitchen Faucet is designed for easy DIY installation, typically completed within 15 minutes. Follow these steps for a smooth setup:

1. **Prepare the Sink:** Ensure the sink area is clean and dry. If replacing an old faucet, remove it and clean the mounting surface.
2. **Mount the Faucet:** Insert the faucet body into the desired hole(s) on your sink or countertop. Use the included deck plate if your sink has three holes.
3. **Secure the Mounting Nut:** From underneath the sink, hand-tighten the mounting nut onto the faucet shank. Use a small adjustable wrench to secure it firmly, but do not overtighten.
4. **Attach Pull-Down Hose:** Connect the pull-down sprayer hose to the quick-connect fitting on the underside of the faucet. Ensure it clicks securely into place.


5. **Clasp the Hose Weight:** Attach the hose weight to the pull-down hose at the indicated position (usually about 6-8 inches from the bottom of the sprayer head when fully retracted) to ensure smooth retraction.
6. **Connect Water Supply Hoses:** Connect the hot and cold water supply hoses to your angle stops. The hoses are typically marked for hot (red) and cold (blue) water. Tighten connections with a wrench, ensuring no leaks.
7. **Test for Leaks:** Slowly turn on the main water supply and check all connections for leaks. Run the faucet for a few minutes to flush out any debris and check for proper operation.




Image: Visual guide for the quick and easy installation process.

FLEXIBLE INSTALLATION OPTIONS

Holes For Installation

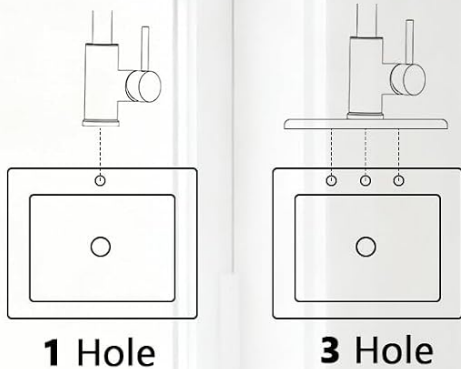

Supply Hose Size

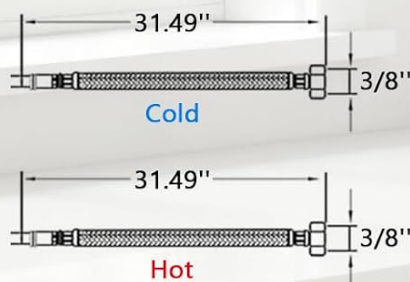

Mounting Hole
Diameter: **1.26-1.38"**

Max Thickness of
Countertop: **2"**

Image: Installation options and key dimensions for the faucet.

OPERATING INSTRUCTIONS

Your FEELSO Kitchen Faucet offers versatile functionality for various kitchen tasks:

- **Water Flow Activation:** Lift the single lever handle to turn on the water flow.
- **Temperature Control:** Move the lever handle left for hot water and right for cold water. Adjust the lever position to achieve your desired water temperature.
- **Pull-Down Sprayer:** Gently pull the sprayer head from the spout to extend the hose. The 20-inch hose provides extended reach for cleaning and filling.
- **Spray Mode Selection:** The sprayer head features buttons to switch between three distinct spray modes:
 - **Stream Mode:** Provides a steady, aerated flow for general washing.
 - **Spray Mode:** Delivers a powerful, wide spray for rinsing dishes and cleaning the sink.
 - **Pause Mode:** Temporarily stops water flow without turning off the main faucet, useful for moving the sprayer

between tasks.

- **Retracting the Sprayer:** Once finished, guide the sprayer head back into the spout. The hose weight will assist in smooth retraction.
- **360° Swivel Spout:** The faucet spout can swivel 360 degrees, allowing for flexible use across single or double sinks.



Image: The three spray modes: Stream, Spray, and Pause, for versatile use.

PULL-DOWN FAUCETS

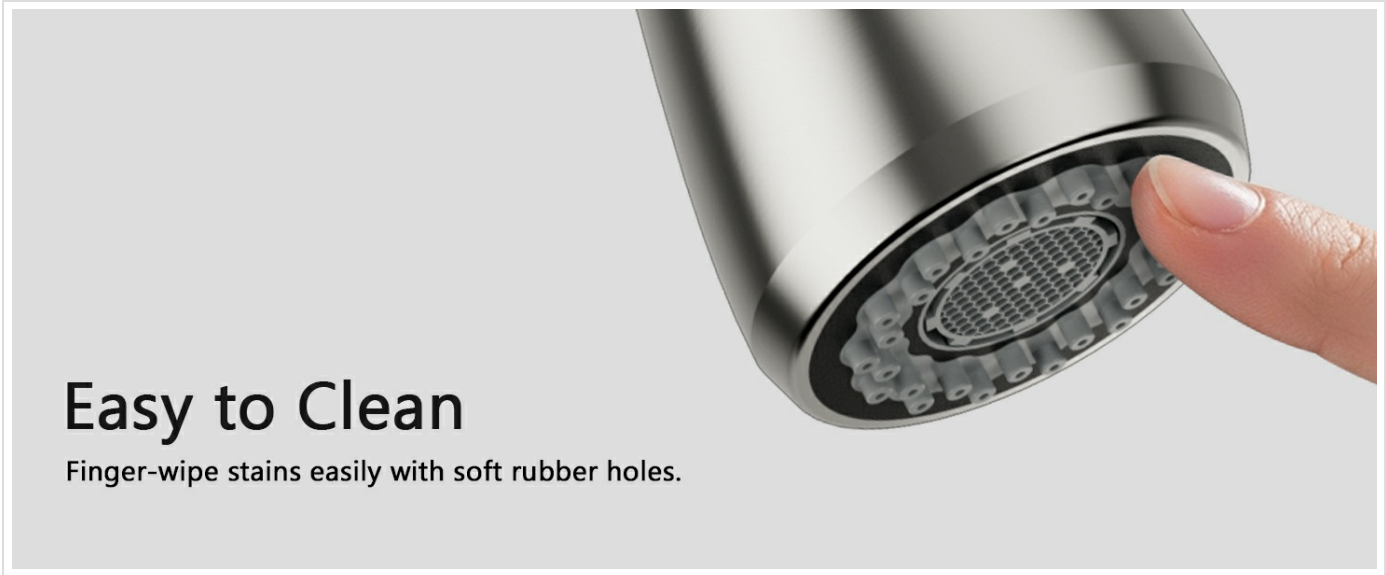


Image: The pull-down sprayer extended, demonstrating its 20-inch reach.

MAINTENANCE

Proper maintenance will ensure the longevity and optimal performance of your FEELSO Kitchen Faucet:

- **Cleaning the Finish:** Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the brushed nickel finish.
- **Cleaning Silicone Nozzles:** The sprayer head features easy-clean silicone nozzles. If mineral deposits build up, gently rub the nozzles with your finger or a soft brush to dislodge them. This helps maintain consistent spray performance.
- **Checking for Leaks:** Periodically inspect all connections under the sink for any signs of leaks. Tighten connections if necessary, but do not overtighten.
- **Cartridge Longevity:** The faucet is equipped with a durable drip-free ceramic cartridge, tested for over 500,000 cycles. No regular maintenance is required for the cartridge itself, but if persistent dripping occurs, it may need replacement.



Easy to Clean

Finger-wipe stains easily with soft rubber holes.

Image: Easy-clean silicone nozzles allow for simple removal of mineral buildup.

TROUBLESHOOTING

If you encounter any issues with your faucet, refer to the following common solutions:

Problem	Possible Cause	Solution
Low Water Flow	Aerator clogged with debris; partially closed shut-off valve; kinked supply line.	Clean or replace aerator; ensure shut-off valves are fully open; check supply lines for kinks.
Faucet Drips or Leaks	Loose connections; worn-out cartridge.	Check and tighten all connections; if dripping persists, the ceramic cartridge may need replacement (contact support).
Sprayer Does Not Retract Fully	Hose weight improperly positioned or obstructed; hose kinked.	Adjust the position of the hose weight; ensure the hose is free from obstructions or kinks under the sink.
Water Temperature Not Adjusting	Hot or cold water supply valve closed; issues with the mixing cartridge.	Ensure both hot and cold water supply valves are fully open. If the problem persists, contact customer support.

SPECIFICATIONS

Detailed specifications for your FEELSO Kitchen Faucet Model FL2:

- **Brand:** FEELSO
- **Model Name:** FL2
- **Material:** SUS304 Stainless Steel
- **Finish Type:** Brushed Nickel
- **Mounting Type:** Deck Mount (1 or 3 holes)
- **Number of Handles:** 1 (Lever Handle)
- **Spout Design:** High Arch Gooseneck Pull Down - 360° Swivel

- **Spout Height:** 10.43 inches
- **Spout Reach:** 8.66 inches
- **Overall Height:** Approximately 16.38 inches
- **Flow Rate:** 1.6 gpm
- **Hose Length (Pull-Down Sprayer):** 20 inches
- **Cartridge:** Drip-free Ceramic Cartridge (500,000+ cycles tested)
- **Certifications:** CEC listed, Lead-Free (NSF/ANSI/CAN 372)
- **Recommended Uses:** Kitchen, RV, Bar, Farmhouse, Camper, Laundry



Image: Detailed product dimensions and supply hose specifications.

Drip-Free Ceramic Cartridge

feelso's ceramic valve technology features a durable disc design, rated for 50000 cycles.



Image: Internal view of the drip-free ceramic cartridge, highlighting its durability.

WARRANTY AND SUPPORT

FEELSO stands behind the quality of its products. Your FEELSO Kitchen Faucet is covered by a:

- **Two-Year Free Replacement Policy:** For any manufacturing defects or functional issues within two years of purchase.
- **Lifetime Technical Support:** Our team is available to assist you with any technical questions or concerns you may have throughout the product's lifespan.

For warranty claims, technical assistance, or any other inquiries, please contact us directly:

Email: sales05@feelsolife.com



Image: Emphasizing the high-quality materials and construction.

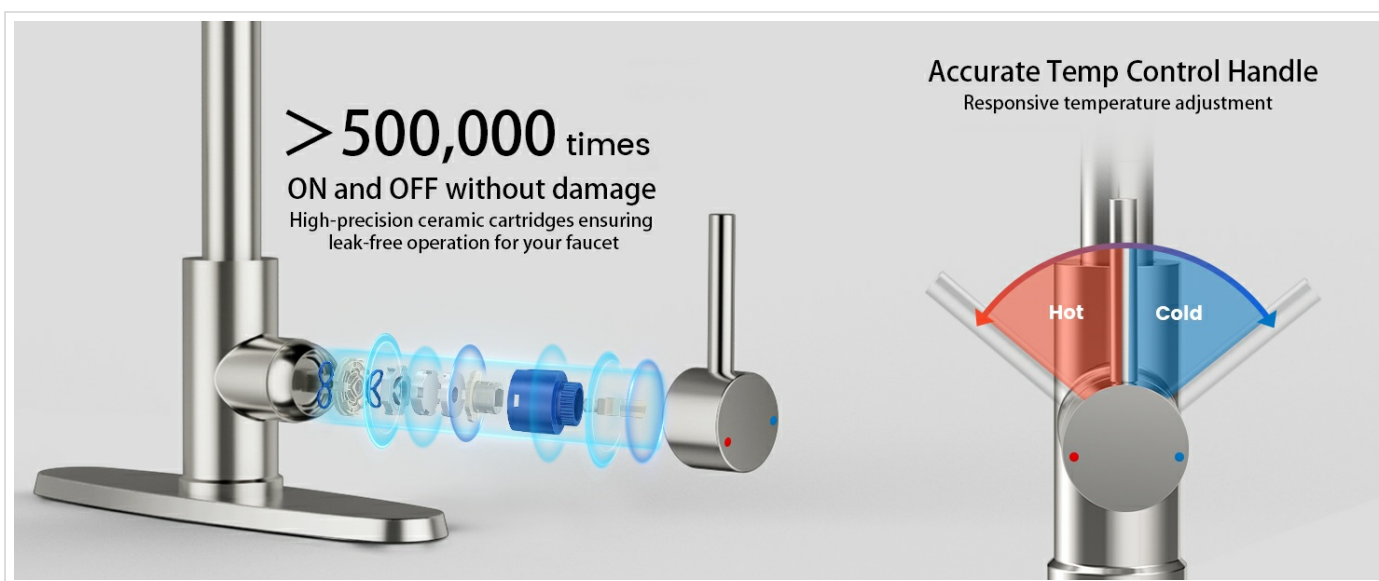


Image: Illustrating the leak-free design for reliable performance.

© 2026 FEELSO. All rights reserved.

FEELSO — Better Water, Better Living.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0FCS7NZ35>

More documents and user manuals: <https://manuals.plus/>