

[Manuals.plus](#) /

› [CP PLUS](#) /

› CP PLUS 3MP 4G Smart Bullet Camera CP-V32G User Manual

CP PLUS CP-V32G

CP PLUS 3MP 4G Smart Bullet Camera CP-V32G User Manual

Model: CP-V32G | Brand: CP PLUS

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your CP PLUS 3MP 4G Smart Bullet Camera, model CP-V32G. This outdoor surveillance camera offers 3MP resolution, 4G SIM card support, two-way audio, full-color night vision, and advanced detection features to secure your property.



Image: CP PLUS 3MP 4G Smart Bullet Camera CP-V32G, highlighting its 4G surveillance capabilities.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- CP PLUS 3MP 4G Smart Bullet Camera (CP-V32G)
- Power Adapter
- Mounting Stand
- Installation Screws and Wall Plugs
- User Manual (this document)

3. PRODUCT OVERVIEW

The CP-V32G camera is designed for robust outdoor surveillance, featuring high-resolution imaging and versatile connectivity.

3.1 Camera Components



Image: Front view of the CP-V32G camera, showing the lens and IR LEDs.

- **Lens:** 3MP high-resolution lens for clear video capture.
- **IR LEDs:** Infrared LEDs for night vision.
- **Antennas:** Dual antennas for stable 4G and Wi-Fi connectivity.

- **Microphone:** For audio input during two-way talk.
- **Speaker:** For audio output during two-way talk.
- **SIM Card Slot:** Supports 4G SIM cards for cellular connectivity.
- **RJ45 Port:** Ethernet port for wired network connection.
- **SD Card Slot:** Supports up to 256GB for local storage.
- **Reset Button:** For factory reset (refer to troubleshooting).

3.2 Key Features

- **3MP Resolution (1296p):** Provides clear and detailed video footage.
- **4G SIM Card Support:** Enables surveillance in locations without Wi-Fi, using a standard 4G SIM.
- **RJ45 Port:** Offers an alternative for wired internet connection.
- **Two-Way Talk:** Communicate with visitors or deter intruders using the built-in microphone and speaker.
- **Full-Color Night Vision:** Captures colored video even in low-light conditions.
- **Motion Detection Alerts:** Receive real-time notifications on your mobile device upon detecting movement.
- **Human Body Detection:** Intelligent detection to distinguish human figures from other moving objects, reducing false alarms.
- **Privacy Mode:** Temporarily block camera view and recording for specific areas to ensure privacy.
- **IP66 Weather Resistance:** Designed to withstand outdoor elements like rain and dust.
- **SD Card Storage:** Supports up to 256GB for continuous or event-based recording.



Image: High-definition video surveillance experience with 3MP full HD video.

4. SETUP INSTRUCTIONS

4.1 Physical Installation

1. **Choose a Location:** Select an outdoor location that provides the desired viewing angle and is within reach of a power

source. Ensure good 4G signal strength if using a SIM card.

2. **Mount the Stand:** Use the provided screws and wall plugs to securely mount the camera stand to a wall or suitable surface.
3. **Attach the Camera:** Securely attach the CP-V32G camera to the mounted stand. Adjust the angle for optimal coverage.

4.2 SIM Card and SD Card Insertion

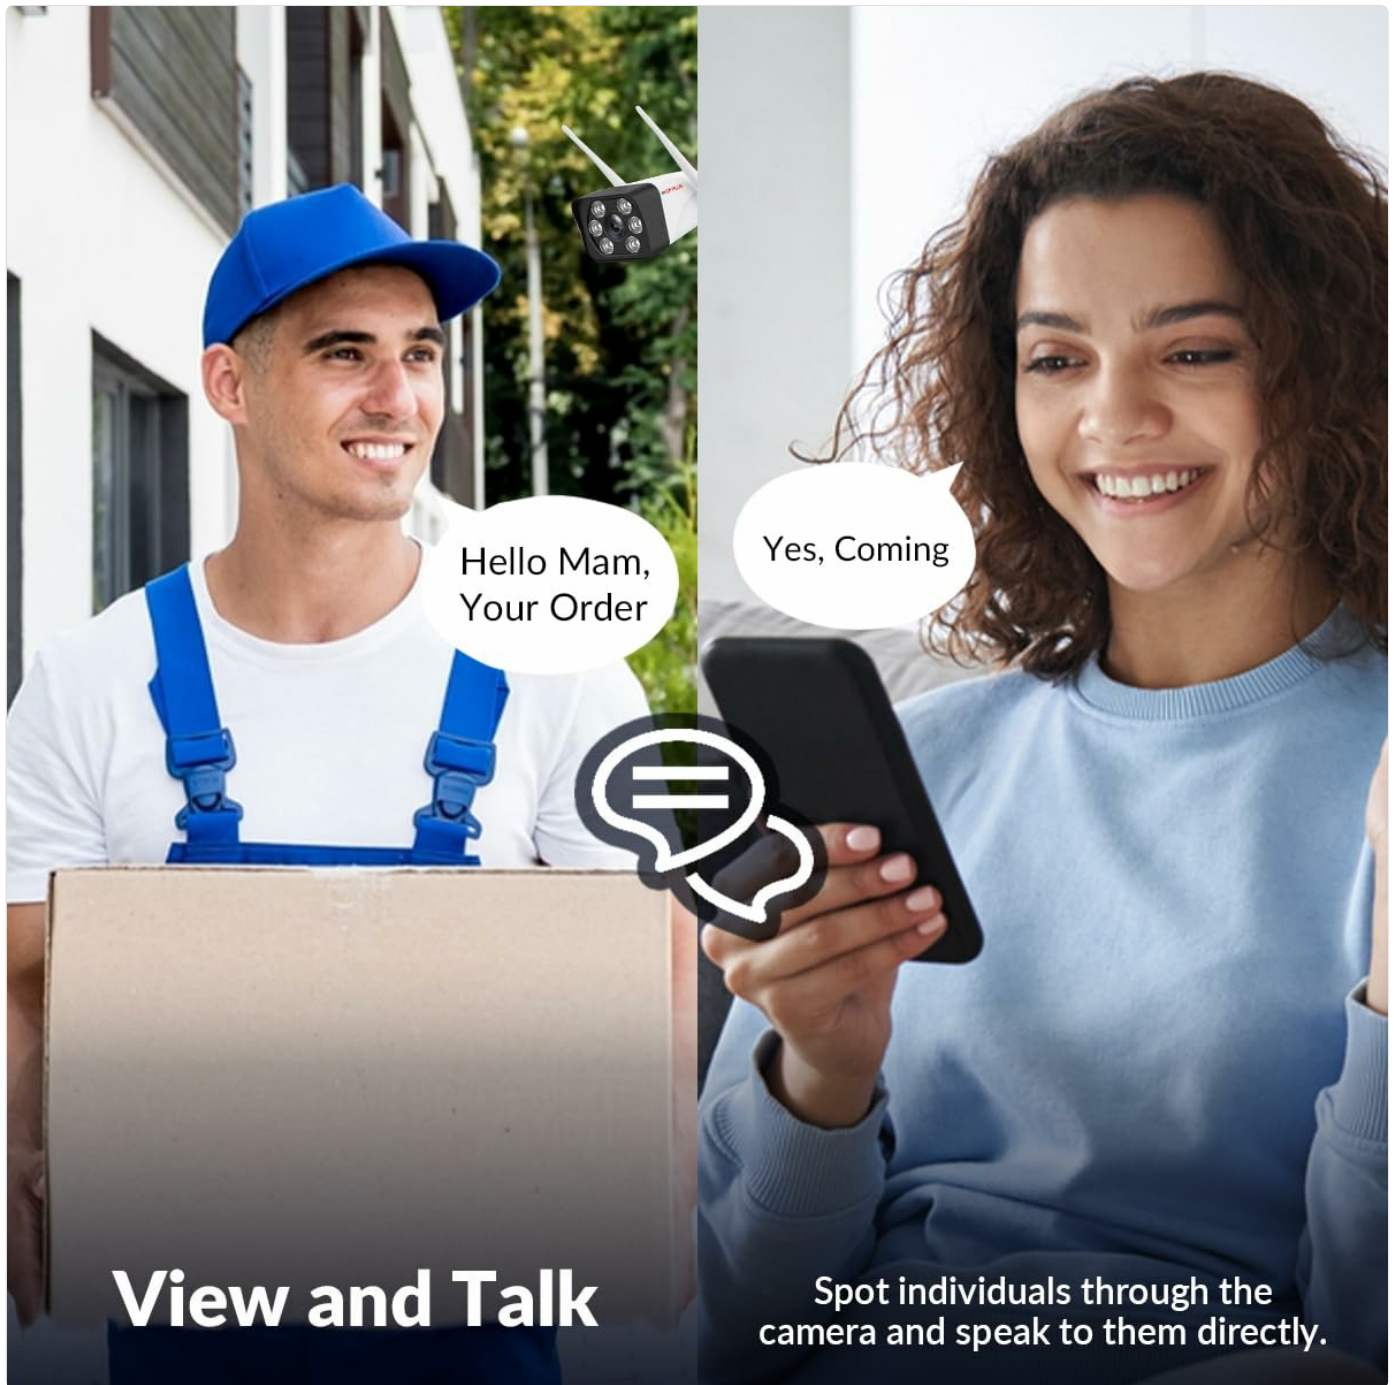


Image: The camera connected via 4G, showing a SIM card icon.

1. **Insert 4G SIM Card:** Locate the SIM card slot on the camera. Insert an activated 4G SIM card into the slot, ensuring correct orientation.
2. **Insert SD Card (Optional):** If local storage is desired, insert a formatted Micro SD card (up to 256GB) into the designated SD card slot.

4.3 Power Connection

Connect the provided power adapter to the camera's power input port and then plug it into a power outlet. The camera will power on and initiate its startup sequence.

4.4 App Integration (Ezykam+)

To access and control your camera, download and configure the Ezykam+ application on your smartphone.

1. Step 1: Download App

Download the Ezykam+ app from the App Store (iOS) or Google Play Store (Android) and register your account.

2. Step 2: Add Device

Open the Ezykam+ app. On the home page, tap the "+" icon to add a new device. Select the model number of your camera (CP-V32G) from the list.

3. Step 3: Network Configuration

Follow the in-app prompts to configure the network. If using 4G, ensure the SIM card is active. If using the RJ45 port, connect an Ethernet cable. The app may guide you to add Wi-Fi network details if applicable for initial setup or alternative connectivity.

4. Step 4: Scan QR Code

Scan the QR code displayed on your device (or provided in the manual/packaging) using the camera. You will hear a voice prompt "Heard the beep" once successful. Wait for a steady blue indicator light, signifying successful configuration.

5. OPERATING INSTRUCTIONS

5.1 Live View and Playback

Open the Ezykam+ app and select your camera from the device list to view the live feed. You can also access recorded footage from the SD card via the app's playback function.

5.2 Two-Way Talk

In the live view interface, tap the microphone icon to initiate two-way communication. Speak into your phone's microphone to transmit audio through the camera's speaker. Release the icon to listen.



Image: Demonstrating two-way talk functionality, allowing interaction with individuals near the camera.

5.3 Motion Detection and Human Body Detection

The camera can detect movement and human shapes, sending alerts to your phone.

- **Enable/Disable:** Navigate to the camera settings in the Ezykam+ app to enable or disable motion detection and human body detection.
- **Sensitivity:** Adjust the detection sensitivity to minimize false alarms.
- **Alerts:** Ensure app notifications are enabled on your smartphone to receive real-time alerts.

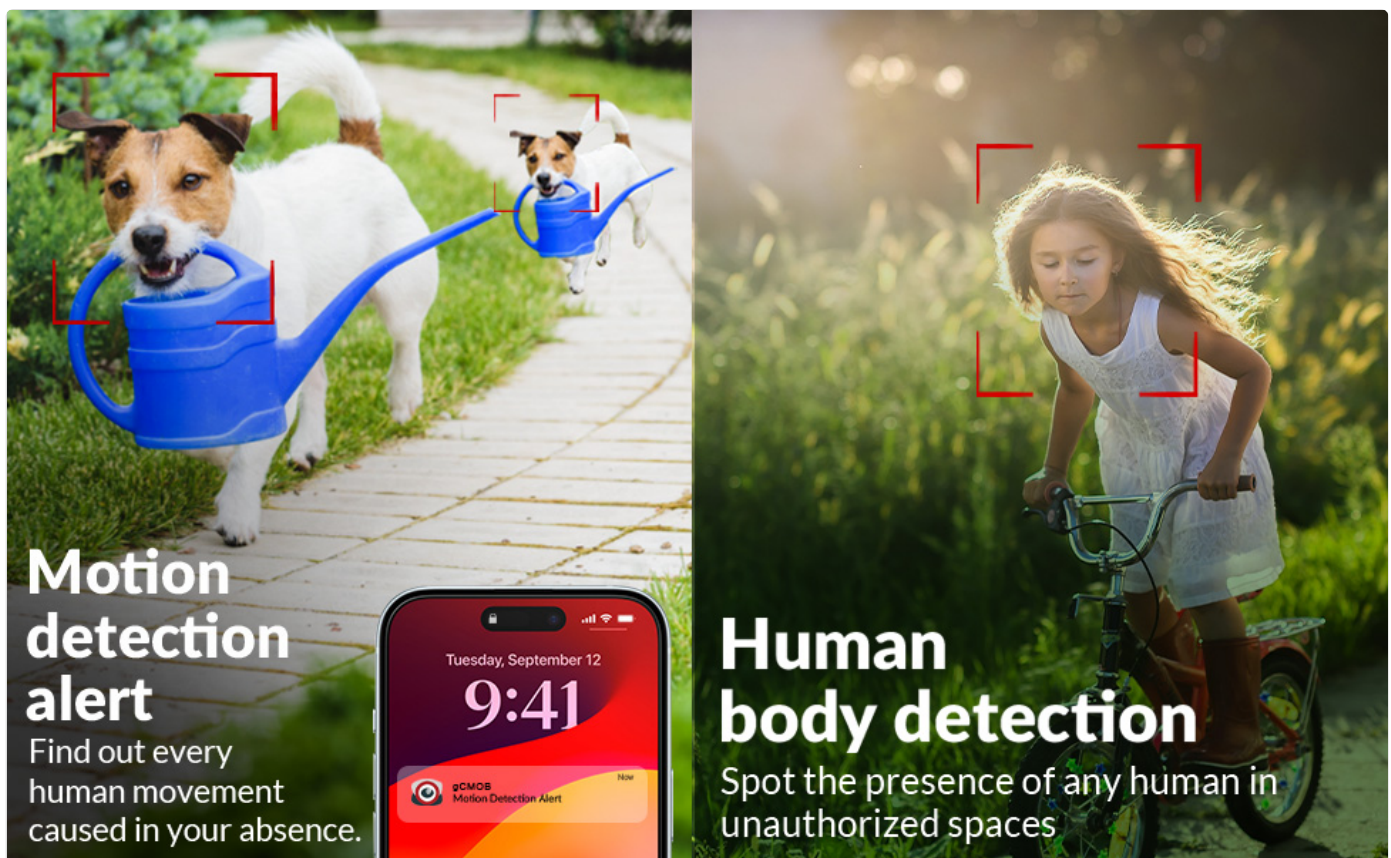


Image: Visual representation of motion detection alerts and human body detection capabilities.

5.4 Full-Color Night Vision

The camera automatically switches to night vision in low light. You can configure it for full-color night vision in the app settings.

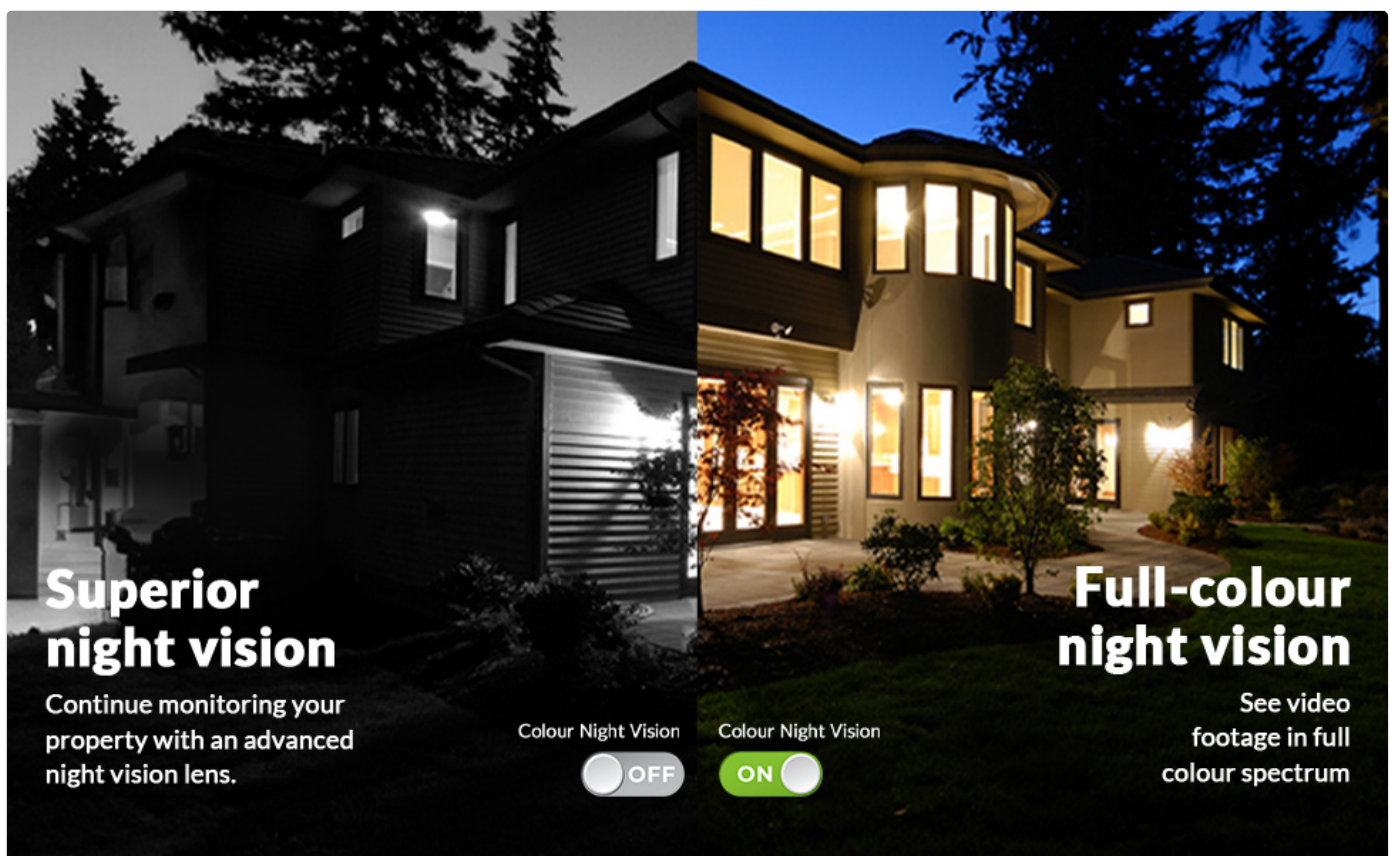


Image: Demonstrating the camera's full-color night vision capability in dark conditions.

5.5 Privacy Mode

Activate Privacy Mode through the Ezykam+ app to temporarily disable video recording and live view for specific areas or times, ensuring personal privacy.



Image: An integrated privacy mode for ensuring complete privacy.

6. MAINTENANCE

- **Cleaning:** Regularly clean the camera lens with a soft, dry cloth to ensure clear image quality. Avoid abrasive cleaners.
- **Firmware Updates:** Check the Ezykam+ app periodically for available firmware updates. Keeping the firmware updated ensures optimal performance and access to new features.
- **Connection Check:** Periodically inspect all cable connections (power, RJ45 if used) for wear or damage.
- **SD Card Management:** If using an SD card, regularly back up important footage and consider formatting the card periodically to maintain performance.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera not powering on.	No power supply; faulty adapter; loose connection.	Ensure the power adapter is securely connected to the camera and a working power outlet. Test the outlet with another device.
No video feed in the app.	No network connection (4G/Wi-Fi/RJ45); camera offline; app issue.	Check 4G SIM card activation and signal strength. If using Wi-Fi/RJ45, verify network connectivity. Restart the camera and the app. Ensure the camera is added correctly in the app.
Motion/Human detection alerts not received.	Detection settings disabled; app notifications off; network issues.	Verify motion and human detection settings are enabled in the Ezykam+ app. Check your phone's notification settings for the app. Ensure stable network connection.
Video footage appears blurry.	Dirty lens; condensation; network bandwidth.	Clean the camera lens with a soft, dry cloth. Ensure there is no condensation inside the lens. Check network speed for live streaming quality.
Outdoor views appear "whitewashed".	Outdated firmware.	Update the camera's firmware through the Ezykam+ app to the latest version.
Cannot connect to the camera after reset.	Improper reset; incorrect re-configuration.	Perform a factory reset by pressing and holding the reset button for approximately 10 seconds until you hear a prompt. Then, re-add the camera to the Ezykam+ app as a new device.

8. SPECIFICATIONS

Feature	Detail
Model Name	CP-V32G
Effective Still Resolution	3 MP
Video Capture Resolution	1296p
Connectivity Technology	Wireless (4G SIM, Wi-Fi), Wired (RJ45)
Indoor/Outdoor Usage	Outdoor
Waterproof Rating	IP66
Special Features	2 Way Audio, Built-In Light, HD Resolution, Motion Sensor, Night Vision, Human Body Detection, Privacy Mode
Night Vision Range	20 Metres
Night Vision Type	Full Color Night Vision
Storage	SD Card (up to 256 GB)
Power Source	AC Adapter (12 Volts, 15 Watts)
Viewing Angle	104 Degrees
Mount Type	Wall mount (Embedded)
Enclosure Material	Plastic

Feature	Detail
Item Dimensions	20 x 17 x 10 Centimeters
Item Weight	350 Grams
Manufacturer	Aditya Infotech, CP Plus

9. WARRANTY AND SUPPORT

9.1 Manufacturer Warranty

The CP PLUS 3MP 4G Smart Bullet Camera (CP-V32G) comes with a **24-month manufacturer warranty** from the date of purchase. Please retain your proof of purchase for warranty claims. The warranty covers manufacturing defects but does not cover damage caused by misuse, accidents, unauthorized modifications, or improper installation.

9.2 Technical Support

For technical assistance, troubleshooting, or any product-related queries, please contact CP PLUS customer support:

- **Phone Support:** +91-8800952952 | +91-120-4555666
- **Email Support:** customer_care@cpplusworld.com
- **Manufacturer Address:** Aditya Infotech, Block A, A-12, Amaltash Marg, Block A, Sector 4, Noida, Uttar Pradesh 201302

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

