Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Dupad story G60S Pro

Dupad story G60S Pro Bluetooth Voice Remote with Keyboard User Manual

Model: G60S Pro

Introduction

Thank you for choosing the Dupad story G60S Pro Bluetooth Voice Remote with Keyboard. This multi-functional remote control is designed to enhance your experience with various devices, offering dual-mode connectivity (2.4G wireless and Bluetooth 5.0), a full QWERTY keyboard, air mouse functionality, voice input, and IR learning capabilities. Please read this manual carefully to ensure proper use and optimal performance of your device.



The G60S Pro remote is a versatile voice air mouse designed for Android TV boxes and Shield TV, offering both 2.4G and Bluetooth 5.0 connectivity.

Package Contents

Please check the package contents upon opening to ensure all items are present:

- 1 x G60S Pro Remote Control
- 1 x USB Receiver
- 1 x USB Charging Cable
- 1 x User Instruction Manual



The G60S Pro remote control shown with its included USB receiver, highlighting its dual-sided design.

Product Features

- **Dual-mode Connectivity:** Supports both 2.4G wireless and Bluetooth 5.0 for broad compatibility.
- **Voice Input:** Built-in high-fidelity microphone for voice search and commands (Google Assistant compatible in 2.4G mode).
- **Full QWERTY Keyboard:** Ergonomic keyboard on the reverse side for easy text input.
- **Air Mouse Function:** 6-axis gyroscope allows for precise cursor control by moving the remote in the air.
- **Backlit Design:** LED backlight for convenient operation in low-light environments.
- **Touchpad:** Multi-touch enabled touchpad for intuitive navigation and gesture control.
- **IR Learning:** Power button supports infrared programming to control other devices.
- **Rechargeable Battery:** Built-in Li-ion battery for long-lasting use.



The G60S Pro features a full QWERTY keyboard on its reverse side, designed for comfortable and efficient typing.

Setup Guide

1. Charging the Remote

Before first use, fully charge the remote control using the provided USB charging cable. Connect the small end of the

USB cable to the remote's charging port and the other end to a standard USB power source (e.g., computer USB port, USB wall adapter).

2. Connecting via 2.4G Wireless (USB Receiver)

1. Insert the USB receiver into an available USB port on your device (e.g., Android TV Box, PC, Projector).
2. The remote control should automatically connect to the receiver. The indicator light on the remote will confirm connection.
3. The 2.4G mode supports Google Voice Assistant functionality.

3. Connecting via Bluetooth 5.0

1. Ensure your device's Bluetooth is enabled.
2. On the G60S Pro remote, press and hold the**OK** button and the **Return** button simultaneously until the indicator light flashes rapidly, indicating pairing mode.
3. On your device, search for Bluetooth devices and select "G60S PRO" from the list to pair.
4. Once paired, the indicator light on the remote will stop flashing.
5. Note: Bluetooth mode does not support Google Voice Assistant.



The G60S Pro remote offers flexible connectivity with both Bluetooth 5.0 and 2.4G wireless modes.

Operating Instructions

Button Layout (Front Side)



Detailed diagram illustrating the functions of each button on the front side of the G60S Pro remote control.

- **Power Button:** Turns the device on/off. Also used for IR learning.
- **Mouse On/Off:** Toggles the air mouse function.
- **Backspace:** Deletes characters.
- **Menu:** Opens context menus.
- **Navigation Keys (Up/Down/Left/Right):** For directional control.
- **OK:** Confirms selections, acts as Mouse Left click.
- **Home:** Returns to the home screen.
- **Return/Mouse Right:** Goes back, acts as Mouse Right click.
- **Volume -** / **Volume +:** Adjusts volume.

- **Play/Pause:** Controls media playback.
- **Previous** / **Next:** Skips tracks.
- **Open Google Voice Assistant:** Activates voice input (2.4G mode only).
- **Backlight Button:** Press and hold to turn on/off the backlight.

Using the Air Mouse (Gyroscope)

With the air mouse function enabled, you can control the cursor on your screen by moving the remote in the air. The built-in 6-axis gyroscope senses your movements for precise navigation.

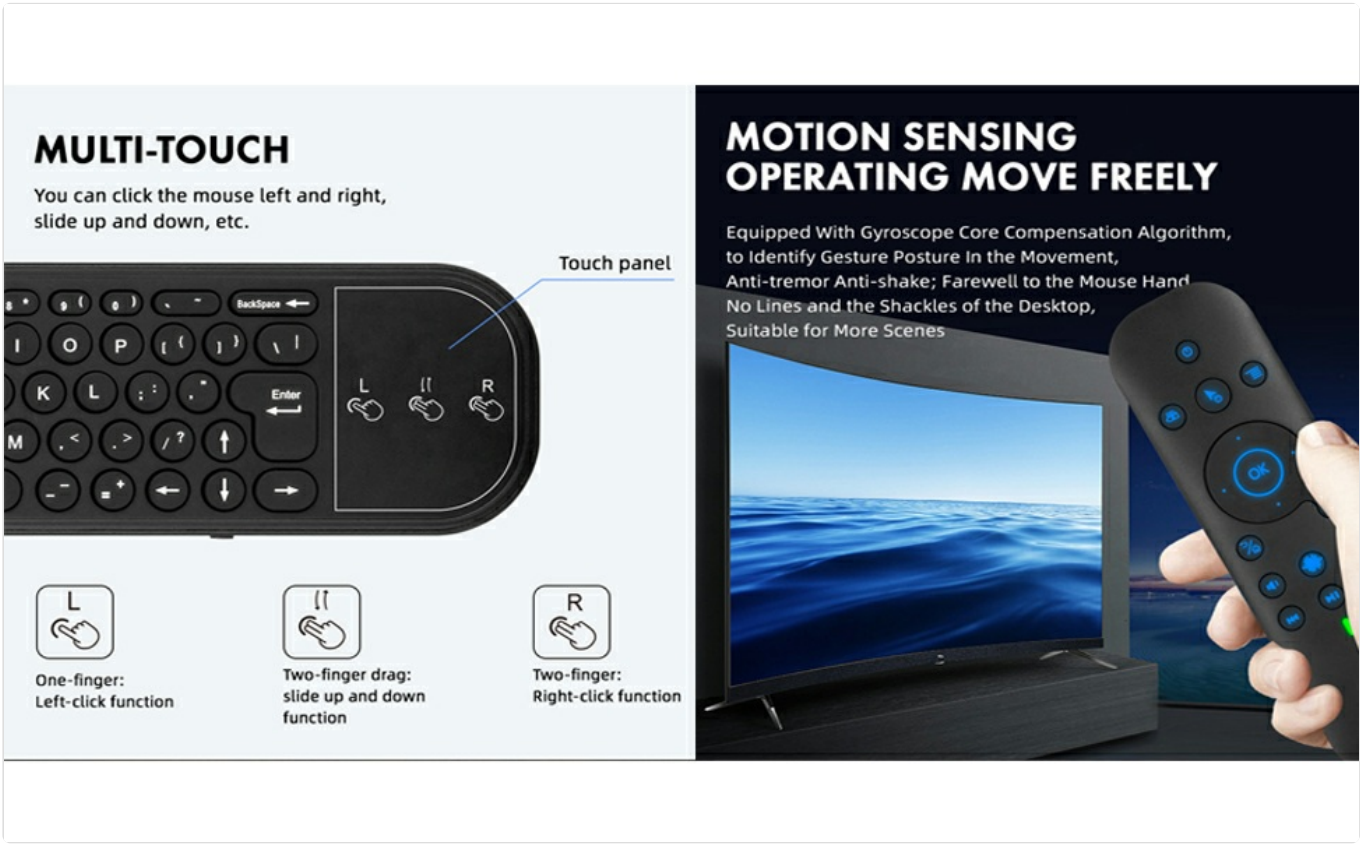

The remote supports multi-touch gestures on its touchpad and allows for free movement control using its motion sensing gyroscope.

Using the Keyboard and Touchpad (Back Side)

Flip the remote to access the full QWERTY keyboard and touchpad. The touchpad supports multi-touch gestures:

- **One-finger tap:** Left-click function.
- **Two-finger tap:** Right-click function.
- **Two-finger drag:** Slide up and down function (scrolling).

Voice Input

Press the dedicated voice button on the front of the remote. Speak clearly into the built-in microphone to use voice search or commands. This feature works with the built-in voice input search box or apps like Google Assistant when connected via 2.4G wireless mode.

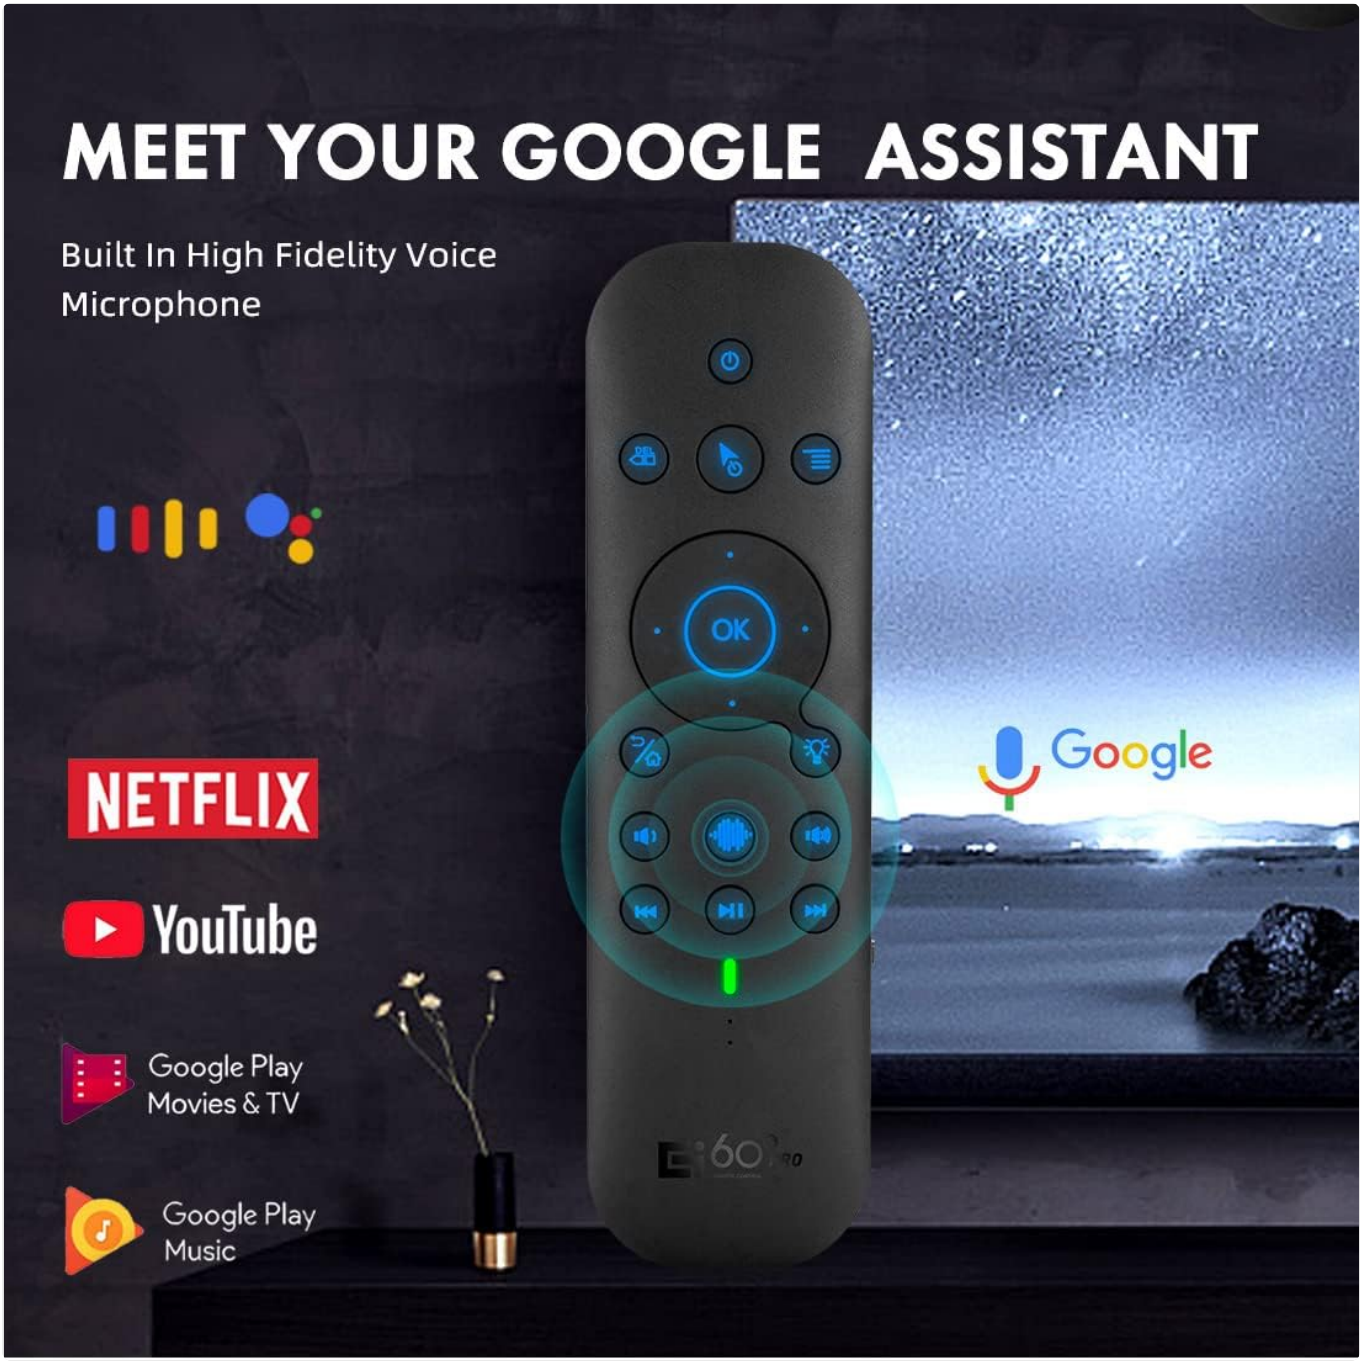

The G60S Pro remote integrates with Google Assistant, allowing voice control for various applications.

Backlight Control

To activate or deactivate the backlight, press and hold the backlight button (light bulb icon) on the front of the remote. The laser-engraved characters will illuminate for visibility in dark environments.



The G60S Pro remote features a backlight function, illuminating the laser-engraved characters for easy use in dark settings.

IR Learning Function

The power button on the G60S Pro remote can learn infrared signals from your existing IR remote control (e.g., TV remote). This allows you to control your TV's power with the G60S Pro.

1. Position the G60S Pro remote and your original IR remote head-to-head on a flat surface, approximately 1 inch apart.
2. Press and hold the **Power** button on the G60S Pro for 3 seconds. The green indicator light will flash slowly, indicating it has entered IR programming mode.
3. Press the **Power** button on your original IR remote. The green indicator light on the G60S Pro will go out after flashing, indicating that the IR programming is complete.



A visual guide demonstrating the simple two-step process for programming the power button using infrared learning.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the remote. Avoid using liquid cleaners or abrasive materials.
- **Battery Care:** The G60S Pro uses a built-in rechargeable Li-ion battery. Recharge the remote when the battery indicator is low. Avoid extreme temperatures and prolonged exposure to direct sunlight.
- **Storage:** Store the remote in a cool, dry place when not in use for extended periods.

Troubleshooting

- **Remote not responding:** Ensure the remote is charged. Check if the USB receiver is properly inserted or if Bluetooth is paired correctly. Try re-pairing the remote.
- **Air mouse not working:** Ensure the mouse function is toggled ON. Recalibrate if necessary by turning the remote off and on, or by re-pairing.
- **Voice input not working:** Verify you are in 2.4G wireless mode for Google Assistant compatibility. Ensure the

microphone is not obstructed.

- **IR learning failed:** Ensure the remotes are 1 inch apart and pointed directly at each other. Repeat the steps carefully. Some IR signals may not be compatible.
- **Keyboard not typing:** Ensure the remote is flipped to the keyboard side and the backlight is on (if applicable). Check connectivity.
- **Connectivity issues with Steam Deck:** Users have reported intermittent Bluetooth connectivity with Steam Deck. If experiencing issues, try using the USB dongle or repeatedly attempting to connect in desktop mode. Adjusting mouse speed settings on the device might also help.

Specifications

Transmission Method	2.4G wireless and BT5.0
Sensors	6 Axis Gyroscope
Number of Keys	80
Range	>10m
Battery Type	Li-ion Battery (included)
Material	ABS Plastic and Silicone
Item Weight	3.17 ounces (90g)
Product Dimensions	7.01 x 1.97 x 0.63 inches (178 x 50 x 16 mm)
Compatible Devices	Nvidia Shield, PC, Projector, Android TV Box, HTPC



Physical dimensions of the G60S Pro remote control.



The G60S Pro remote is compatible with a wide range of devices, including TV boxes, PCs, projectors, smart TVs, and more.

Warranty and Support

Dupad story offers an unconditional 30-day money-back guarantee and lifetime after-sales service for the G60S Pro remote control. If you encounter any issues or are not satisfied with your purchase, please do not hesitate to contact Dupad story customer support. Your satisfaction is our priority.
For support, please refer to the contact information provided with your purchase or visit the official Dupad story store page on Amazon: Dupad story Store

© 2025 Dupad story. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BWWLJJ6B

More documents and user manuals: **https://manuals.plus/**