



Manuals.plus /

› AMZASA /

› AMZASA AS9018-10BK Modern Farmhouse 10-Light Chandelier Instruction Manual

AMZASA AS9018-10BK

AMZASA AS9018-10BK Modern Farmhouse 10-Light Chandelier Instruction Manual

Model: AS9018-10BK

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your AMZASA AS9018-10BK Modern Farmhouse 10-Light Chandelier. Please read all instructions carefully before beginning installation and retain this manual for future reference.

The AMZASA AS9018-10BK is a modern farmhouse-style chandelier featuring a linear metal frame with ten extending arms, each designed to hold an E12 candle-style bulb. Its design is suitable for various interior spaces, including dining rooms, living rooms, kitchens, and foyers.



Image 1.1: Overview of the AMZASA AS9018-10BK Chandelier.

2. IMPORTANT SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always turn off the main power supply at the circuit breaker before installation, removal, or servicing.

- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections.
- This fixture is intended for indoor use only.
- Ensure the mounting surface can support the weight of the fixture.
- Do not connect this fixture to an ungrounded electrical system.
- Use only E12 base bulbs as specified. Do not exceed the maximum wattage indicated on the fixture.
- The fixture is UL Listed, ensuring compliance with safety standards.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or broken, contact customer support.

- Chandelier Body (pre-wired central hub with arms)
- Ceiling Canopy
- Mounting Bracket
- Chain (47.3 inches / 120 cm)
- Adjustable Rods (2 x 11.8 inches / 30 cm each)
- Quick Installation Instructions
- Installation Hardware (screws, wire nuts, ground wire)

4. SPECIFICATIONS

Model Number	AS9018-10BK
Brand	AMZASA
Material	Iron
Bulb Type	E12 Candelabra Base (10 bulbs required, not included)
Power Source	Corded Electric
Fixture Dimensions (Lamp Only)	Diameter 26.8 inches (68.1 cm) x Height 17.3 inches (43.9 cm)
Total Height (Ceiling to Bottom)	Adjustable, up to 76.8 inches (195.1 cm)
Chain Length	47.3 inches (120 cm)
Adjustable Rods	2 x 11.8 inches (30 cm)
UL Listed	Yes

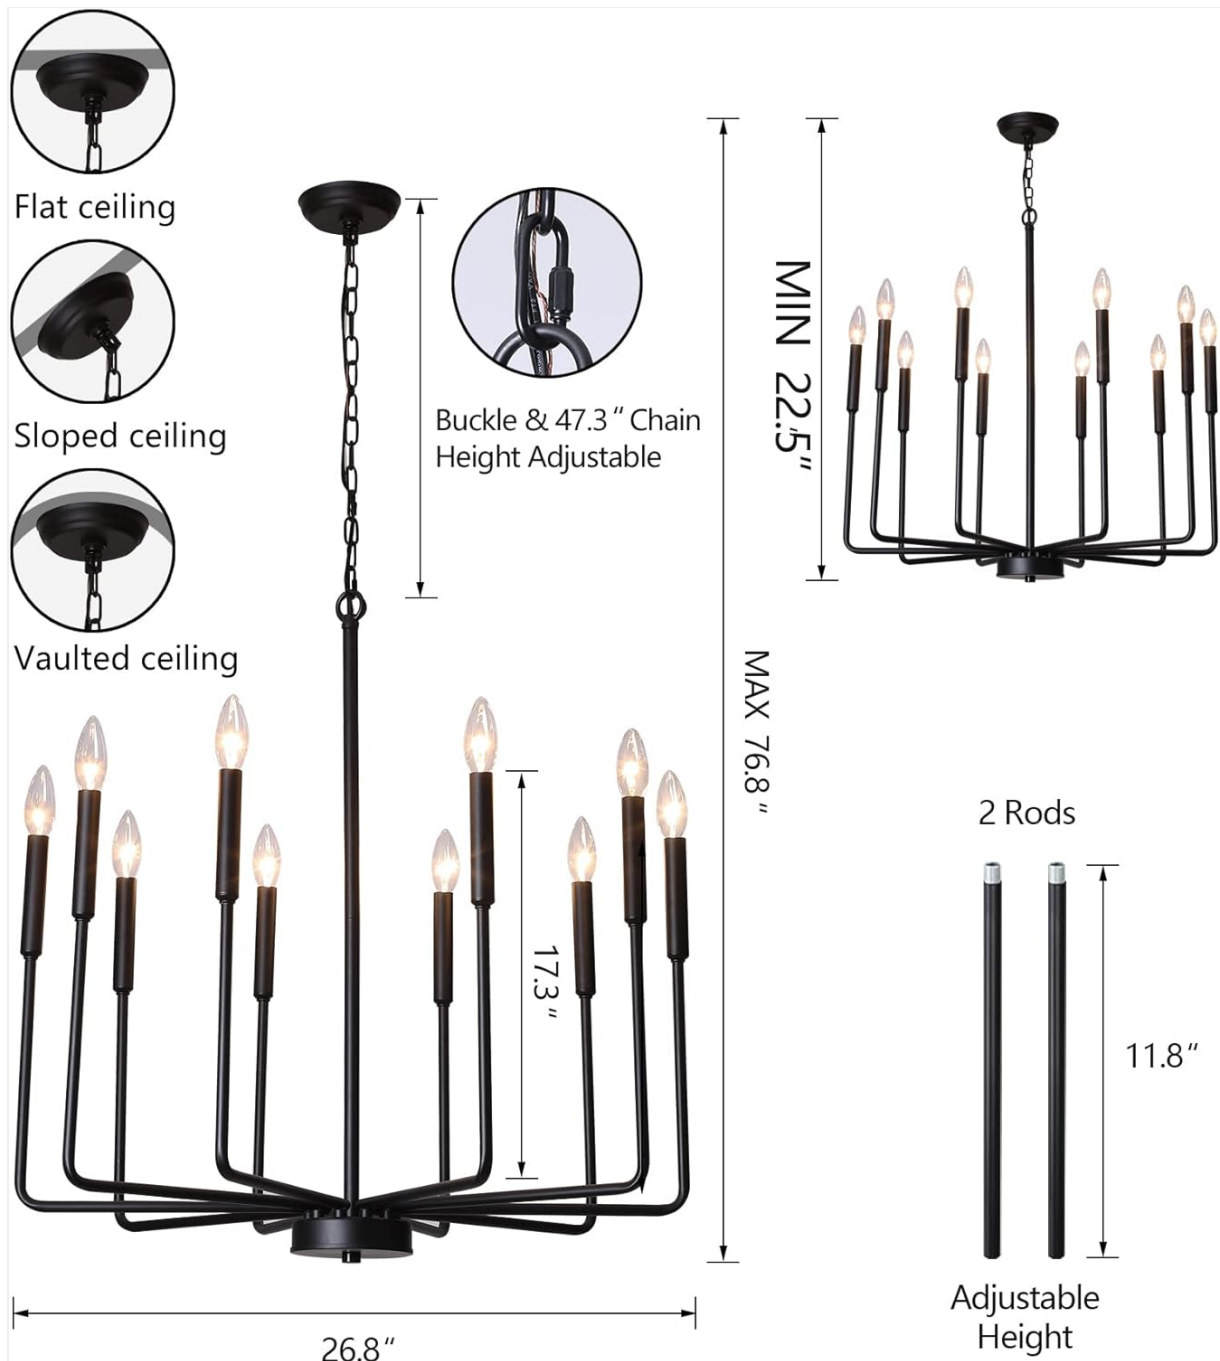


Image 4.1: Detailed dimensions and adjustable height components.

5. INSTALLATION

Tools Required (Not Included): Screwdriver, wire strippers, electrical tape, ladder, safety glasses.

5.1 Pre-Installation

1. **Turn off power:** Locate the circuit breaker that supplies power to the light fixture outlet box and turn it off.
2. **Unpack:** Carefully remove all contents from the packaging.
3. **Inspect:** Check all components for any damage.

5.2 Assembly and Mounting

1. **Attach Mounting Bracket:** Secure the mounting bracket to your ceiling junction box using the provided screws. Ensure it is firmly attached.
2. **Adjust Hanging Height:** Determine the desired hanging height. The fixture includes a 47.3-inch chain and two 11.8-inch rods for adjustment. You can use the chain, the rods, or a combination to achieve the desired

length. Connect the chosen components to the chandelier body and the ceiling canopy.

3. **Wiring:** Carefully connect the fixture's wires to the household electrical wires. Match the wires according to standard electrical codes (typically black to black, white to white, and ground to ground). Use the provided wire nuts to secure connections and wrap with electrical tape for added safety.
4. **Mount Canopy:** Carefully lift the chandelier and tuck the wires into the junction box. Secure the ceiling canopy to the mounting bracket using the canopy screws. Ensure the canopy sits flush against the ceiling.
5. **Install Bulbs:** Screw ten E12 base bulbs (not included) into the sockets. Do not overtighten.



Image 5.1: Key components for installation, including the adjustable ceiling plate and E12 bulb base.

6. OPERATION

After successful installation, restore power at the circuit breaker. The chandelier is now ready for use.

- **Bulb Compatibility:** This fixture requires 10 E12 candelabra base bulbs. It is compatible with dimmable and non-dimmable E12 LED, energy-saving, candle, halogen, or incandescent bulbs.
- **Dimming Functionality:** If you wish to use a dimming feature, ensure you install dimmable E12 bulbs and

connect the fixture to a compatible dimmer switch (not included).



Image 6.1: Chandelier with lights off and on, illustrating compatible E12 bulb types.

7. MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your chandelier.

- **Cleaning:** Always turn off power before cleaning. Use a soft, dry cloth to wipe down the fixture. Avoid using abrasive cleaners, solvents, or polishes as they may damage the finish.
- **Bulb Replacement:** Ensure power is off before replacing bulbs. Allow old bulbs to cool completely before removal.

8. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power, loose wiring, faulty bulb.	Check circuit breaker. Ensure all wire connections are secure. Replace bulbs.
Lights flicker.	Loose bulb, incompatible dimmer, unstable power.	Tighten bulbs. Ensure dimmer is compatible with LED bulbs if used. Consult an electrician for power issues.
Fixture is unstable.	Improper mounting.	Ensure mounting bracket is securely fastened to the junction box and canopy screws are tight.

If the problem persists after attempting these solutions, please contact AMZASA customer support.

9. WARRANTY AND SUPPORT

AMZASA provides a **3-year product warranty** for this light fixture. This warranty covers defects in materials and workmanship under normal use.

For any questions regarding installation, operation, or warranty claims, please contact AMZASA customer service.

Our online service is available 24 hours to assist you.

Contact Information: Please refer to the product packaging or the official AMZASA website for the most current customer support contact details.