

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Faber](#) /

› [Faber Hood Trendy 90cm BLDC Autoclean Slant Shape Chimney User Manual](#)

## Faber TRENDY IN BLDC HCSCFL BK 90

# Faber Hood Trendy 90cm BLDC Autoclean Slant Shape Chimney User Manual

Model: TRENDY IN BLDC HCSCFL BK 90

## 1. INTRODUCTION

This manual provides essential information for the safe and efficient operation, installation, and maintenance of your Faber Hood Trendy 90cm BLDC Autoclean Slant Shape Chimney. Please read this manual thoroughly before using the appliance and retain it for future reference.

Image 1.1: Front view of the Faber Hood Trendy 90cm Chimney.

Image 1.2: Illustration of the chimney's effectiveness in maintaining kitchen air quality.

## 2. SAFETY INFORMATION

Always adhere to the following safety guidelines to prevent injury or damage to the appliance:

- Ensure the electrical supply matches the voltage specified on the appliance rating plate.
- Do not allow children to operate the appliance without supervision.
- Regularly clean the appliance to prevent grease buildup, which can be a fire hazard.
- Do not flambé under the range hood.
- Ensure adequate ventilation in the room when the range hood is used simultaneously with gas or other fuel-burning appliances.
- Disconnect the appliance from the power supply before any cleaning or maintenance.

## 3. PRODUCT OVERVIEW

The Faber Hood Trendy 90cm Chimney is a wall-mounted, slant-shaped kitchen appliance designed for efficient smoke and odor extraction. It features advanced controls and a powerful BLDC motor.

## Key Features:

- **Type:** Vertical/Slant Shape, Wall Mounted
- **Size:** 90 cm (suitable for 4-6 burner stoves)
- **Filter Type:** Filterless design for reduced maintenance
- **Suction Power:** 1500 m<sup>3</sup>/hr
- **Control Type:** Touch Control, Gesture Control, and Motion Sensor
- **Number of Speeds:** 9
- **Noise Level:** 58dB
- **Motor:** BLDC Motor 130W for efficient and quiet operation
- **Special Features:** Autoclean function, Built-In Oil Collector, 1 LED Lamp

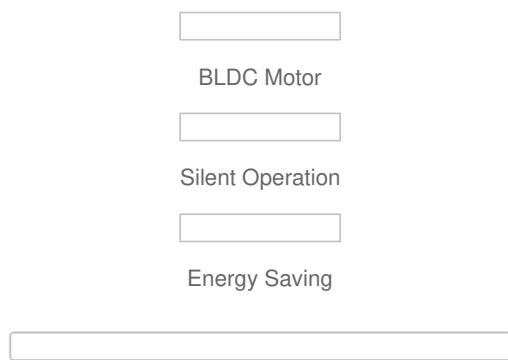


Image 3.1: The BLDC motor ensures quiet and powerful performance.



Image 3.2: Internal view highlighting the BLDC motor for efficient suction.



Image 3.3: The appliance features a black glass finish.

## 4. INSTALLATION (SETUP)

The Faber Hood Trendy chimney is designed for wall-mounted installation. Professional installation is highly recommended to ensure proper functioning and safety.

### 4.1 Pre-Installation Checks

- Verify that the wall structure can support the weight of the chimney.
- Ensure a suitable electrical outlet is available near the installation area.
- Confirm the chimney size (90cm) is appropriate for your cooking range.

### 4.2 Mounting and Ducting

The chimney can be installed with or without a duct, depending on your kitchen setup. For ducted installation, a standard size duct pipe is required to vent air outside. For ductless operation, a charcoal filter (to be purchased separately) is necessary to recirculate filtered air back into the kitchen.

For installation services, please contact Faber customer support at 1800-209-3484.

## 5. OPERATING INSTRUCTIONS

Your Faber Hood Trendy chimney offers multiple control options for ease of use.

### 5.1 Control Panel

The chimney features a touch control panel, gesture control, and a motion sensor.



Image 5.1: Overview of touch and gesture control functionalities.



Gesture Control

### 5.2 Power On/Off and Speed Adjustment

- **Touch Control:** Use the designated touch buttons on the panel to power on/off the chimney and adjust between the 9 available speed settings.
- **Gesture Control:** Wave your hand in front of the motion sensor to power on/off the chimney or change fan speeds. Refer to the specific gesture patterns detailed in the quick start guide.
- **Motion Sensor:** The motion sensor can detect presence and activate certain functions automatically.

### 5.3 Enhanced Airflow

To maximize suction efficiency, lift the front flap of the chimney. This action increases the capture area for smoke and odors.

## 6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your chimney.

### 6.1 Autoclean Function

The chimney is equipped with an autoclean feature that simplifies internal cleaning. Activate this function periodically as per the instructions in the quick start guide to melt and collect grease into the oil collector.



Image 6.1: The auto-clean feature and built-in oil collector aid in maintaining cleanliness.



Auto-Clean

### 6.2 Oil Collector

The built-in oil collector gathers the grease and oil removed during cooking and the autoclean cycle. Regularly empty and clean the oil collector to prevent overflow and maintain hygiene.

Image 6.2: Location of the oil collector for easy access and cleaning.

### 6.3 Exterior Cleaning

- Wipe the exterior surfaces with a soft cloth dampened with mild detergent.
- Avoid abrasive cleaners or scouring pads, as they can damage the finish.
- Ensure the appliance is completely dry before resuming operation.



Filterless Design

## 7. TROUBLESHOOTING

Refer to the following table for common issues and their potential solutions.

Problem	Possible Cause	Solution
Chimney not turning on	No power supply; loose connection; control panel issue.	Check power plug and circuit breaker. Ensure connections are secure. Contact service if control panel is unresponsive.
Low suction power	Oil collector full; flap not fully open; ducting obstruction (if applicable).	Empty and clean the oil collector. Ensure the front flap is fully open. Check ducting for blockages.
Unusual noise during operation	Loose components; motor issue; foreign object.	Ensure all parts are securely fastened. If noise persists, contact customer support.
Autoclean not functioning	Incorrect activation; electrical fault.	Refer to the quick start guide for correct autoclean activation steps. If issue persists, contact service.

If the problem persists after attempting these solutions, please contact Faber customer support.

## 8. SPECIFICATIONS

Detailed technical specifications for the Faber Hood Trendy 90cm Chimney.

Image 8.1: Product dimensions (LxWxH: 90 x 41.5 x 48.5 Centimetres).

Specification	Value

Specification	Value
Model Number	330.0738.744
Air Flow Capacity	1500 Cubic Meters Per Hour
Material	Stainless Steel
Noise Level	58 Decibels
Mounting Type	Wall Mount
Included Components	Chimney
Controls Type	Touch, Gesture
Voltage	230 Volts
Number of Speeds	9
Item Weight	16.4 kg
Light Source Type	LED
Wattage	180 Watts
Filter Type	Filterless
Ventilation Type	Ducted/Vented
Vent Hood Design	Wall Mounted Canopy Hood
Annual Energy Consumption	290 Kilowatts
Product Dimensions (LxWxH)	90 x 41.5 x 48.5 Centimetres
Colour	Black
Finish Type	Powder Coated
Country of Origin	India

## 9. WARRANTY AND CUSTOMER SUPPORT

Faber provides comprehensive warranty coverage and dedicated customer support for your chimney.

### 9.1 Warranty Information

- **Comprehensive Product Warranty: 2 Years**
- **Motor Warranty: 12 Years**

The warranty covers manufacturing defects and specified components. Please refer to the warranty card included with your product for detailed terms and conditions.



Image 9.1: Information regarding extended warranty options.

## 9.2 Customer Support

For installation, service requests, or any product-related queries, please contact:

- **Faber Customer Care:** 1800-209-3484
- **Manufacturer:** Franke Faber India Pvt. Ltd.
- **Address:** 1086/1/2, SANASWADI, TAL - SHIRUR, PUNE - 412208, MAHARASHTRA, INDIA

---