

[Manuals.plus](#) /

› [Boxlood](#) /

› Boxlood E14 Smart Candle Bulb Dimmable RGB Cool White & Warm White User Manual

Boxlood E14 (SLZC3705-A)

Boxlood E14 Smart Candle Bulb User Manual

Model: SLZC3705-A

1. INTRODUCTION

Welcome to your Boxlood E14 Smart Candle Bulb. This manual provides comprehensive instructions for setup, operation, and troubleshooting to ensure optimal performance of your smart lighting system. Enjoy the convenience of smart lighting with customizable colors, brightness, and voice control.

2. IMPORTANT SAFETY INFORMATION

- For indoor use only.
- Do not disassemble the bulb.
- Ensure power is off before installation or removal to prevent electric shock.
- Only compatible with 2.4GHz Wi-Fi networks. 5GHz networks are not supported.
- Not suitable for totally enclosed luminaires, as this may shorten bulb lifespan.
- Keep out of reach of children.

3. PRODUCT FEATURES

The Boxlood E14 Smart Candle Bulb offers a range of advanced features for a personalized lighting experience:

- **Warm White to Cool White & Multi-Color:** Adjust color temperature from 2700K (warm white) to 6500K (cool white) and choose from 16 million RGB colors.
- **Dimmable Brightness:** Seamlessly adjust brightness from 1% to 100%.
- **Voice Control:** Compatible with Amazon Alexa and Google Home for hands-free operation.
- **Remote Control:** Control your bulbs from anywhere using the Smart Life app via Wi-Fi or mobile data.

- **Scene Modes:** Access 8 pre-set scene modes or customize your own for different moods and activities.
- **Group Control:** Create groups to control multiple bulbs simultaneously with a single command.
- **Schedule Setting:** Automate on/off times to fit your daily routine.

3.8cm

11.7cm



Boxlood



Dimmable



16 Million Colors



Schedule Setting



Group Control



APP Control



WiFi Connection(2.4Ghz)



Works with Amazon Alexa

This image illustrates the key features of the Boxlood E14 Smart Candle Bulb, such as dimmability, 16 million color options, scheduling, group control, app control, 2.4GHz Wi-Fi connectivity, and compatibility with Amazon Alexa.

4. TECHNICAL SPECIFICATIONS

Brand	Boxlood
Model	E14 Smart Candle Bulb (SLZC3705-A)
Cap Type	E14
Wattage	5W

Luminous Flux	450 Lumen
Colour Temperature	2700K-6500K (Warm White to Cool White)
Voltage	240 Volts
Connectivity	2.4GHz Wi-Fi
Special Features	Dimmable, RGB, Voice Control, App Control
Item Weight	190 g
Package Dimensions	13.1 x 8.5 x 8.5 cm

5. SETUP GUIDE

5.1 Before You Begin

- Ensure your Wi-Fi network is 2.4GHz. 5GHz networks are not supported.
- Download the "Smart Life" app from the App Store (iOS) or Google Play Store (Android).
- Register or log in to your Smart Life account.

5.2 Installation Steps

1. **Power Off:** Turn off the light fixture's power switch before installing the bulb.
2. **Install Bulb:** Screw the Boxlood E14 Smart Candle Bulb into the E14 socket.
3. **Power On & Pair Mode:** Power on the light fixture. The bulb should start blinking rapidly. If it does not blink rapidly, turn the light switch off and on three times (on-off-on-off-on) until it enters rapid blinking mode.
4. **Open App:** Open the Smart Life app on your smartphone. Tap "+" in the top right corner to add a device.
5. **Select Device Type:** Select "Lighting" > "Light Source (Wi-Fi)".
6. **Confirm Blinking:** Confirm the indicator light on the bulb is blinking rapidly. Enter your 2.4GHz Wi-Fi network password.
7. **Connect:** The app will begin connecting to the bulb. Once connected, you can rename the bulb for easy identification (e.g., "Living Room Light").



Bedtime
9:30pm

Sunrise
6:30am



Set Schedules

use the Smart Life app to schedule the lights to turn on and off around your daily routine

This diagram illustrates the connectivity flow: the smart bulb connects to the Smart Life app, which then integrates with voice assistants like Amazon Alexa and Google Home for enhanced control.

6. OPERATING YOUR SMART BULB

6.1 Smart Life App Control

Once connected, you can control your Boxlood E14 Smart Candle Bulb from anywhere using the Smart Life app:

- **Brightness Adjustment:** Use the brightness slider to adjust the light intensity from 1% to 100%.
- **Color Adjustment:** Select from a palette of 16 million colors using the color wheel.
- **Color Temperature:** Adjust the white light from warm (2700K) to cool (6500K) to suit your preference.
- **Scene Modes:** Choose from various pre-programmed scenes (e.g., Reading, Party, Leisure) or create and customize your

own.

- **Scheduling:** Set timers for the bulb to turn on/off automatically at specific times or based on sunrise/sunset.
- **Group Control:** Create groups of bulbs within the app to control multiple lights simultaneously.



Multi Colors for Choice
color saturation and brightness
are tunable

This image displays the Smart Life app interface, highlighting the color selection wheel and various color options available for the smart bulb, demonstrating how users can choose from a wide spectrum of colors.




Colour Temperature Adjustable
available from warm white to cool white

This image shows the Smart Life app's color temperature slider, allowing users to seamlessly adjust the light from warm white to cool white, catering to different ambiance needs.

6.2 Voice Control (Alexa & Google Home)

After linking your Smart Life account to Amazon Alexa or Google Home, you can use simple voice commands to control your bulbs:

- "Alexa, turn on [Bulb Name]."
- "Hey Google, set [Bulb Name] to blue."
- "Alexa, dim [Bulb Name] to 50%."
- "Hey Google, change [Bulb Name] to warm white."
- "Alexa, set [Bulb Name] to the Reading scene."

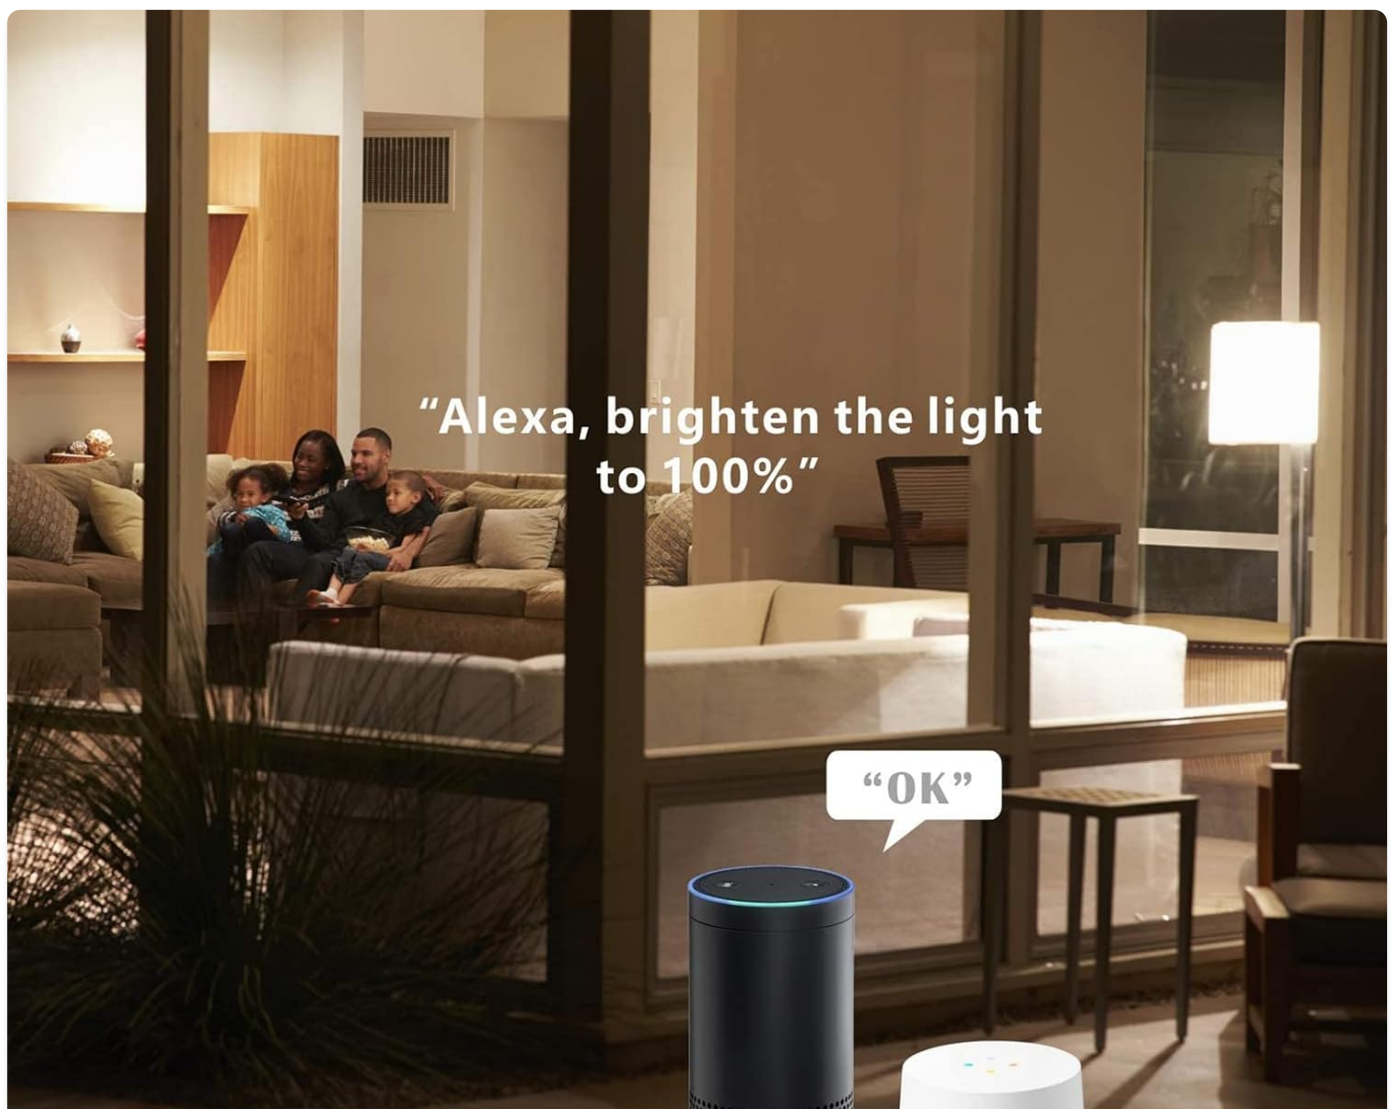

Voice Control



amazon alexa



Google Assistant



This image illustrates the convenience of voice control, showing Amazon Alexa and Google Home devices in a home setting, ready to respond to commands like "Alexa, brighten the light to 100%".

Your browser does not support the video tag.

This video demonstrates the Boxlood smart bulbs being controlled via Alexa voice commands, showcasing the ease of changing colors and brightness.

7. MAINTENANCE

The Boxlood E14 Smart Candle Bulb requires minimal maintenance to ensure longevity and optimal performance:

- Clean the bulb with a soft, dry cloth when necessary to remove dust.
- Do not use liquid cleaners, abrasive materials, or harsh chemicals, as these can damage the bulb's surface or internal

components.

- Ensure the bulb is cool and the power is off before cleaning.

8. TROUBLESHOOTING

Bulb not connecting to Wi-Fi:

Ensure your Wi-Fi network is 2.4GHz. Turn the bulb off and on three times to enter pairing mode (rapid blinking). Double-check your Wi-Fi password. Try moving the bulb closer to your Wi-Fi router during setup.

Bulb appears offline in the app:

Check your home Wi-Fi connection. Restart your Wi-Fi router. Ensure the bulb has continuous power and the light switch is not turned off. If the issue persists, try re-pairing the bulb.

Voice control not working:

Ensure your Smart Life account is linked correctly to your Alexa or Google Home app. Check the bulb's status in the Smart Life app to confirm it's online. Verify that the device name you are using in your voice command matches the name in the app.

Bulb not responding to commands:

Try turning the light switch off and on to reset the bulb. If issues persist, consider deleting the bulb from the Smart Life app and re-pairing it following the setup instructions.

9. WARRANTY AND SUPPORT

Boxlood E14 Smart Candle Bulbs come with a **2-YEAR SUPPORT** warranty, ensuring peace of mind regarding your purchase.

For any questions, technical assistance, or issues, please feel free to contact the Boxlood after-sale service team directly through your order on Amazon. We are committed to providing prompt and effective solutions to ensure your satisfaction.

For more information and other products, visit the official Boxlood Store: [Boxlood Store](#)

© 2024 Boxlood. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for

conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question