

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ZEBRONICS](#) /

› [ZEBRONICS S32A Curved Gaming Monitor User Manual](#)

## ZEBRONICS ZEB-S32A

# ZEBRONICS S32A Curved Gaming Monitor User Manual

Model: ZEB-S32A | Brand: ZEBRONICS

## 1. INTRODUCTION

This manual provides comprehensive instructions for the setup, operation, and maintenance of your ZEBRONICS S32A 1800R Curved Gaming Monitor. Please read this manual thoroughly before using the product to ensure proper functionality and to prevent damage.

## 2. PRODUCT OVERVIEW

### 2.1 Key Features

- WQHD (2560x1440) Resolution for high-quality visuals.
- 1800R Curved Screen for an immersive viewing experience.
- 180Hz Refresh Rate for smooth, lag-free gaming and video.
- 1ms MPRT Response Time for reduced motion blur.
- FreeSync Support for tear-free gameplay.
- HDR10 Support for enriched colors and contrast.
- Dual HDMI and Dual DisplayPort inputs for versatile connectivity.
- Built-in Speakers for integrated audio.
- Bezel-Less Design for a sleek appearance.
- Wall Mountable design for flexible installation.

### 2.2 Package Contents

Upon unpacking, ensure all the following items are present:

- ZEBRONICS S32A Monitor - 1 Unit
- Power Cable
- DisplayPort Cable (typically included, though not explicitly listed in "whats\_in\_the\_box", it's standard for

gaming monitors)

- User Manual (this document)
- Monitor Stand Components (Base and Neck)


## 2.3 Product Views and Components




Figure 1: Front view of the ZEBRONICS S32A Curved Gaming Monitor, showcasing its 32-inch curved display, 180Hz refresh rate, FreeSync support, and 1ms MPRT response time.



Figure 2: Side profile of the ZEBRONICS S32A monitor, highlighting its slim design and the curvature of the screen.

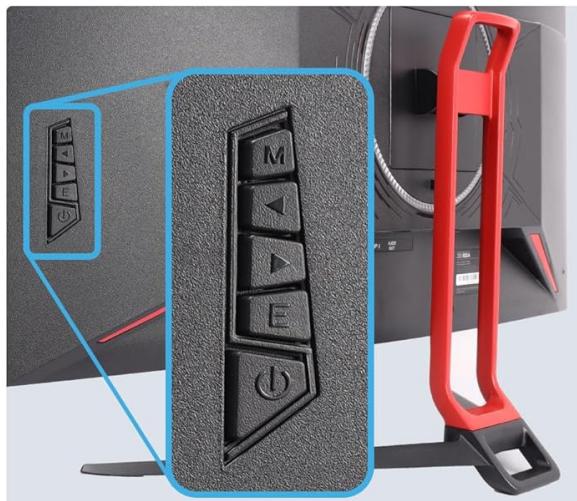

**Controls**

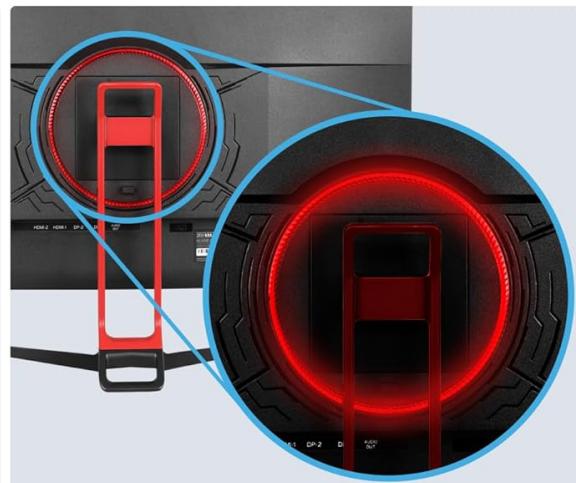


**Red LED Ring**



**Connectivity & Ports**

Figure 3: Detailed view of the monitor's rear, showing the control buttons (M, Up, Down, E, Power), the red LED ring accent, and the various connectivity ports including HDMI and DisplayPort inputs, and Audio Out.

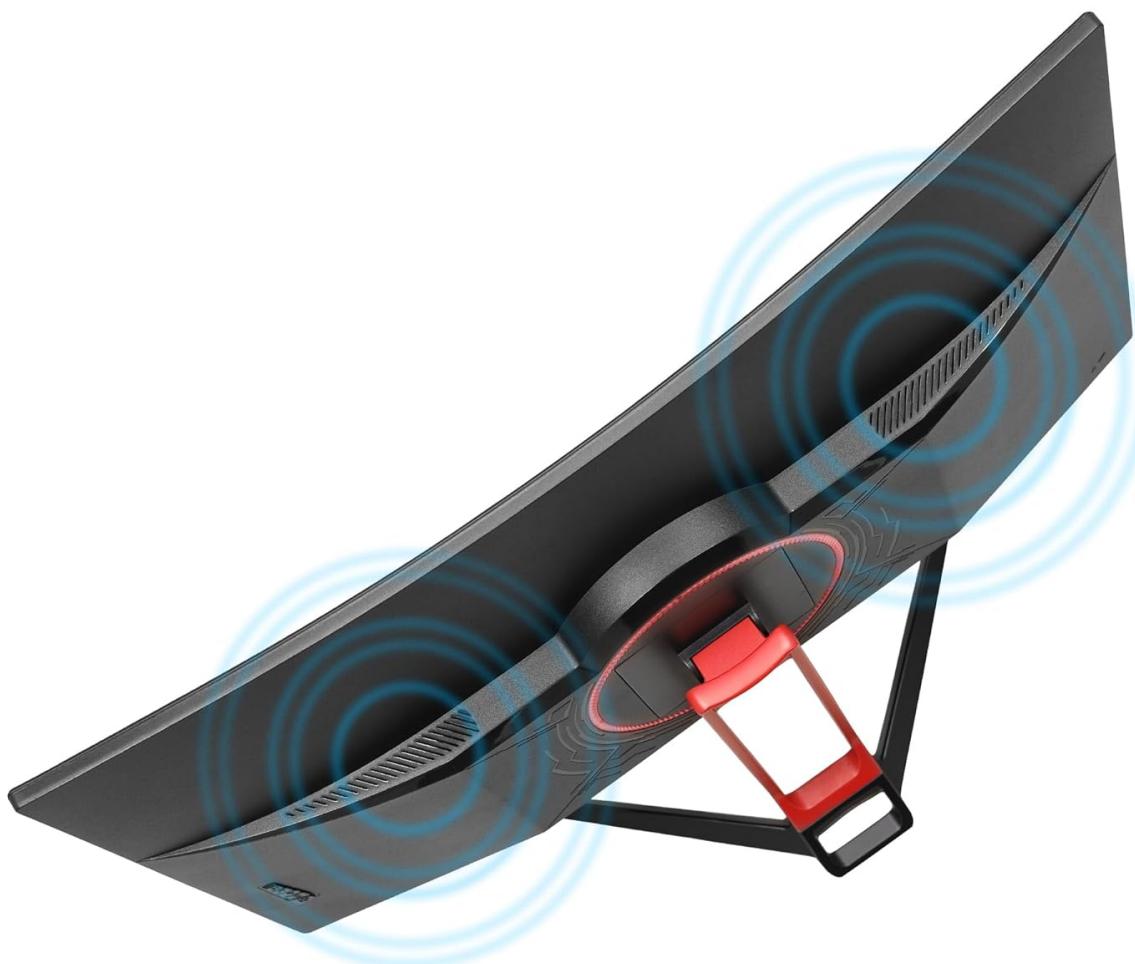

## Built-In Speakers


Figure 4: Rear view of the ZEBRONICS S32A monitor, illustrating the location of the built-in speakers, indicated by sound wave icons.



Figure 5: Visual representation of the monitor's display capabilities, including WQHD (2560x1440) resolution, 16:9 aspect ratio, support for 16.7 million display colors, and a maximum brightness of 280 nits.



**Wall Mountable**

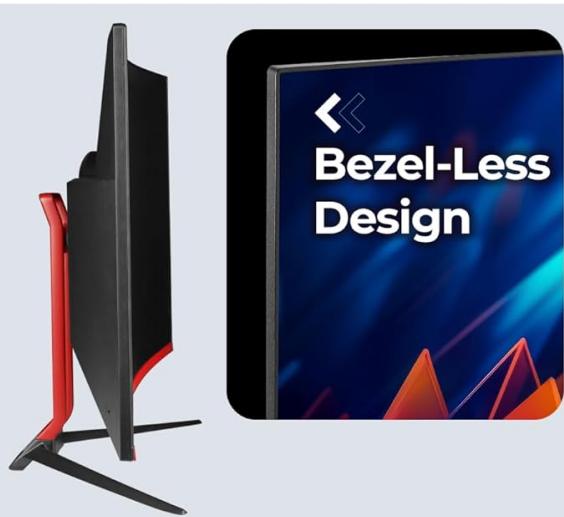

**Ultra Slim Design**



**Metal Stand**



**119% sRGB**

Figure 6: Overview of additional monitor features, including its wall-mountable design, ultra-slim profile, sturdy metal stand, and 119% sRGB color gamut coverage.

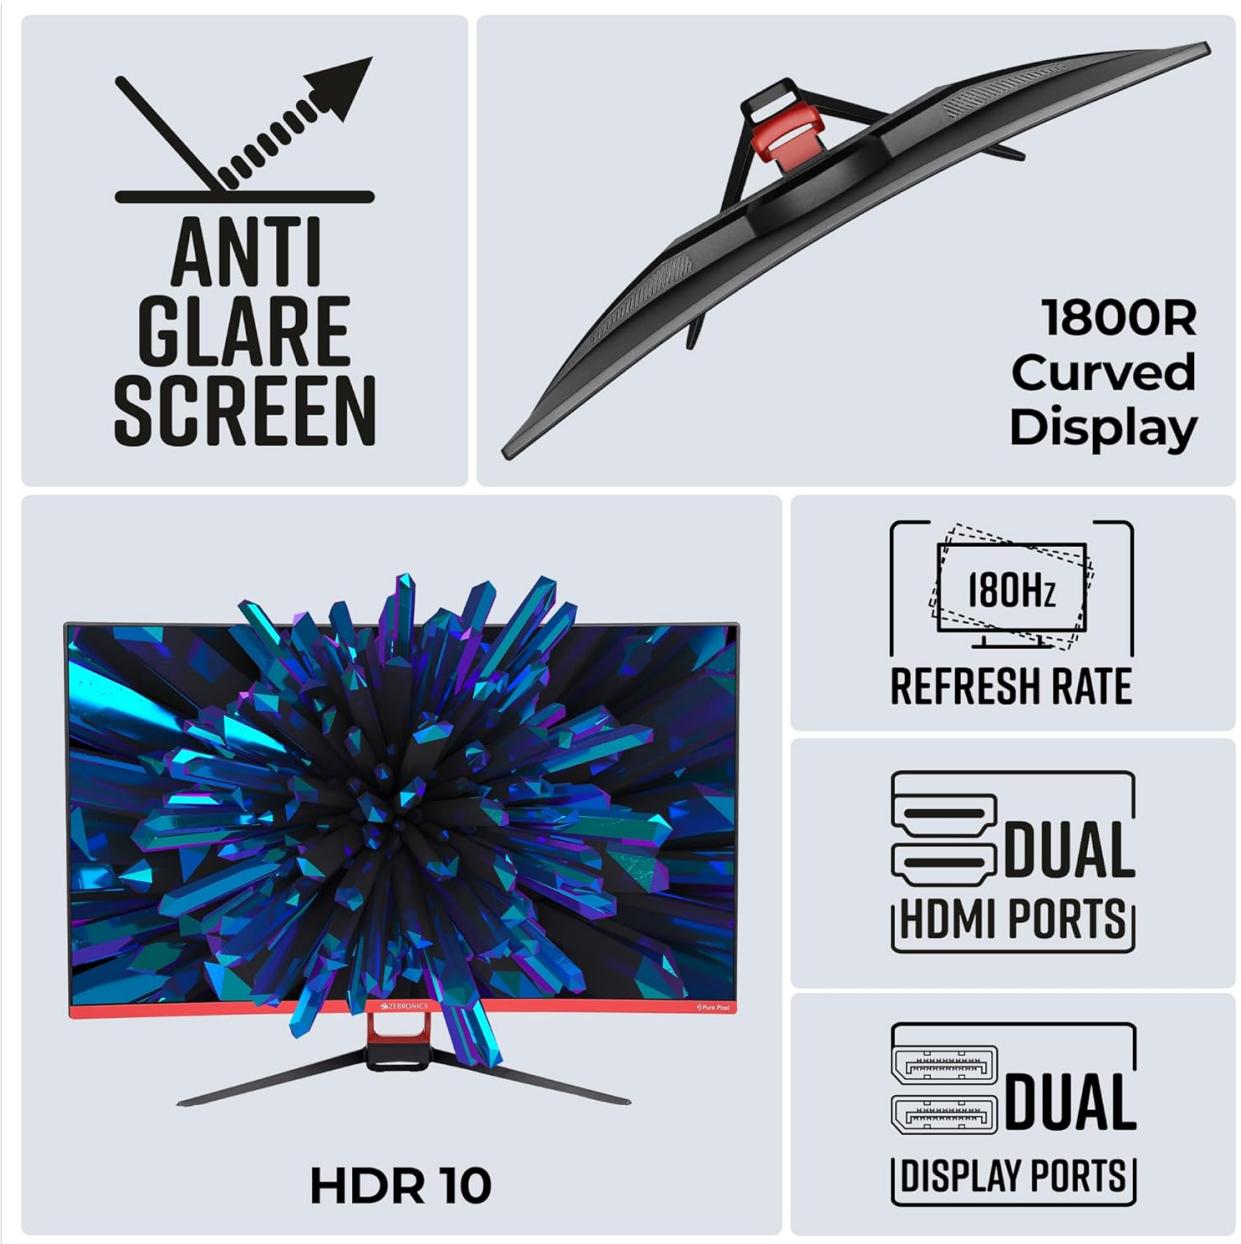


Figure 7: Key display technologies of the monitor, such as Anti-Glare screen, 1800R curved display, 180Hz refresh rate, dual HDMI and dual DisplayPort inputs, and HDR10 support.

### 3. SETUP INSTRUCTIONS

#### 3.1 Assembling the Stand

1. Carefully remove the monitor and stand components from the packaging.
2. Attach the stand neck to the monitor's rear mounting point. Ensure it clicks securely into place or is fastened with screws if provided.
3. Attach the stand base to the bottom of the stand neck. Tighten any screws to ensure stability.
4. Place the assembled monitor on a stable, flat surface.

#### 3.2 Connecting to a Device

1. Ensure both the monitor and your computer/device are powered off.
2. Connect one end of the DisplayPort or HDMI cable to the corresponding port on your computer's graphics card.
3. Connect the other end of the cable to one of the DisplayPort (DP-1, DP-2) or HDMI (HDMI-1, HDMI-2)

inputs on the back of the monitor.

4. For audio output to external speakers or headphones, connect a 3.5mm audio cable from the "AUDIO OUT" port on the monitor to your audio device.
5. Connect the power cable to the monitor's power input, then plug the other end into a power outlet.

### 3.3 Wall Mounting (Optional)

The ZEBRONICS S32A monitor is wall mountable. Refer to the VESA mounting standard (check monitor specifications for exact size, typically 100x100mm) and use a compatible wall mount kit (sold separately). Follow the instructions provided with your wall mount kit for safe and secure installation.

## 4. OPERATING INSTRUCTIONS

---

### 4.1 Powering On/Off

- Press the Power button (marked with a circle and vertical line) located on the back of the monitor to turn it on or off.

### 4.2 On-Screen Display (OSD) Menu

The monitor features an On-Screen Display (OSD) menu for adjusting various settings. Use the control buttons on the back of the monitor to navigate and select options:

- **M (Menu) Button:** Press to open the OSD menu or enter a sub-menu.
- **Up/Down Arrows:** Navigate through menu options.
- **E (Enter) Button:** Confirm a selection or exit a sub-menu.
- **Power Button:** Exit the OSD menu.

Key OSD settings include:

- **Picture Settings:** Brightness, Contrast, Sharpness, Color Temperature, HDR mode.
- **Display Settings:** Aspect Ratio, Input Source selection (HDMI 1/2, DP 1/2).
- **Audio Settings:** Volume control for built-in speakers or audio out.
- **Gaming Features:** FreeSync (Adaptive Sync), MPRT (Motion Picture Response Time) settings.
- **OSD Settings:** Language, OSD Timeout, Transparency.

### 4.3 Optimizing Display Settings

- **Refresh Rate:** Ensure your computer's display settings are configured to 180Hz for the smoothest experience. This is typically found in your operating system's display settings or graphics card control panel.
- **Resolution:** Set the display resolution to WQHD (2560x1440) for optimal clarity.
- **FreeSync:** Enable FreeSync (Adaptive Sync) in the monitor's OSD menu and in your graphics card control panel (AMD Radeon Software) for tear-free gaming.
- **HDR10:** Activate HDR10 in the OSD menu and your operating system's display settings for enhanced color and contrast with compatible content.

## 5. MAINTENANCE

---

### 5.1 Cleaning the Monitor

- Always power off and unplug the monitor before cleaning.

- Use a soft, lint-free cloth slightly dampened with water or a non-abrasive screen cleaner.
- Do not spray cleaner directly onto the screen.
- Avoid using benzene, thinner, ammonia-based cleaners, or abrasive materials, as these can damage the screen or casing.

## 5.2 General Care

- Avoid placing heavy objects on the monitor or its cables.
- Do not expose the monitor to direct sunlight, excessive heat, or extreme cold.
- Keep the monitor away from liquids and excessive dust.
- Ensure adequate ventilation around the monitor to prevent overheating.

## 6. TROUBLESHOOTING

If you encounter issues with your monitor, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No image on screen	Monitor not powered on; Incorrect input source; Loose video cable.	Ensure power cable is connected and monitor is on. Press 'E' or navigate OSD to select correct input (HDMI/DP). Check video cable connection at both monitor and computer.
Image is blurry or distorted	Incorrect resolution; Graphics driver issues.	Set display resolution to 2560x1440. Update your graphics card drivers.
No sound from built-in speakers	Volume too low; Incorrect audio output selected on computer; Audio cable not connected (if using Audio Out).	Increase monitor volume via OSD. Select the monitor as the default audio output device in your computer's sound settings. If using external speakers, ensure they are connected to the monitor's Audio Out port and powered on.
Screen flickering or tearing (during gaming)	FreeSync not enabled; Refresh rate mismatch.	Ensure FreeSync (Adaptive Sync) is enabled in both monitor OSD and graphics card settings. Verify refresh rate is set to 180Hz in computer display settings.

If the problem persists after trying these solutions, please contact ZEBRONICS customer support.

## 7. SPECIFICATIONS

Feature	Detail
Model Name	ZEB-S32A
Screen Size	32 inch (80cm)
Panel Type	Curved (1800R)
Resolution	WQHD (2560 x 1440)

Feature	Detail
Refresh Rate	180Hz
Response Time	1ms MPRT
Brightness	280 nits (max)
Aspect Ratio	16:9
Color Support	16.7 Million Colors, HDR10
Connectivity	2 x HDMI, 2 x DisplayPort, Audio Out
Sync Technology	FreeSync
Speakers	Built-in
Mounting	Wall Mountable (VESA compatible)
Dimensions (LxWxH)	16.3 x 83.5 x 53.4 cm
Item Weight	6.5 kg
Country of Origin	China

## 8. WARRANTY AND SUPPORT

ZEBRONICS products are designed for reliability and performance. For warranty information, please refer to the warranty card included with your product or visit the official ZEBRONICS website. Keep your purchase receipt as proof of purchase for warranty claims.

For technical assistance, troubleshooting beyond this manual, or service requests, please contact ZEBRONICS customer support through their official channels. Contact details can typically be found on the ZEBRONICS website or on the product packaging.

**Note:** Extended warranty plans may be available for purchase separately. Refer to product listing or contact seller for details.

© 2024 ZEBRONICS. All rights reserved.

### Related Documents - ZEB-S32A

 <p><b>Zebronics ZEB-WARRIOR Speaker Connectivity Guide</b></p> <p>Learn how to connect your Zebronics ZEB-WARRIOR multimedia speakers with this concise guide, covering USB and 3.5mm jack connections for optimal audio playback.</p>
 <p><b>Zebronics ZEB-THUNDER NEO Curved Gaming Monitor User Manual</b></p> <p>Comprehensive user manual for the Zebronics ZEB-THUNDER NEO Curved Gaming Monitor, providing setup, operation, and maintenance instructions.</p>
 <p><b>Zebronics ZEB-Delight Pro Mini Soundbar User Manual - Features, Specifications, and Operation Guide</b></p> <p>This user manual provides comprehensive details for the Zebronics ZEB-Delight Pro Mini Soundbar. It covers product features, technical specifications, package contents, button descriptions, and step-by-step instructions for various modes including Bluetooth, USB, mSD, AUX, and FM Radio. Learn how to charge the device, use call functions, and set up TWS mode.</p>
 <p><b>Zebronics ZEB-SONATA 2 Soundbar User Manual</b></p> <p>Comprehensive user manual for the Zebronics ZEB-SONATA 2 Soundbar. This guide details setup, features, specifications, safety precautions, and connectivity modes including Bluetooth, USB, AUX, HDMI ARC, and Coaxial input for an enhanced audio experience.</p>



Portable BT Speaker  
**ZEB**  
**VITA**



User Manual  
[www.zebronics.com](http://www.zebronics.com)

### [Zebronics ZEB-VITA Portable Bluetooth Speaker User Manual](#)

Comprehensive user manual for the Zebronics ZEB-VITA Portable BT Speaker. Learn about its features, specifications, button functions, charging, Bluetooth pairing, Micro SD/USB, AUX, FM radio, and TWS modes.



Power Bank  
**MW61**



User Manual  
[www.zebronics.com](http://www.zebronics.com)

### [Zebronics ZEB-MW61 10000mAh Power Bank User Manual | Features, Specs & Charging](#)

Detailed user manual for the Zebronics ZEB-MW61 10000mAh Power Bank. Learn about its features, specifications, charging instructions, LED indicators, and package contents for optimal use.