



[Manuals.plus](#) /

› [IDEQY](#) /

› IDEQY 5 Ring Chandelier Instruction Manual - Model CF8022-246810

IDEQY CF8022-246810

IDEQY 5 Ring Chandelier Instruction Manual

Model: CF8022-246810

INTRODUCTION

This manual provides essential instructions for the safe installation, operation, and maintenance of your IDEQY 5 Ring Chandelier, Model CF8022-246810. Please read all instructions carefully before proceeding with installation or use. Retain this manual for future reference.



Image: The IDEQUY 5 Ring Chandelier, showcasing its design and illumination.

SAFETY INFORMATION

WARNING: Risk of Electric Shock. Disconnect power at the circuit breaker before installation or servicing.

- Ensure the electrical supply is turned off at the main circuit breaker or fuse box before beginning installation.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with electrical wiring.
- Do not install this fixture in wet locations.
- Handle crystal components with care to prevent breakage.
- The chandelier itself has a built-in dimmer. Do not connect this chandelier to an external dimmer switch or dimming system, as this may cause malfunction or damage.

PACKAGE CONTENTS

Verify that all components are present and undamaged before installation. If any parts are missing or damaged, contact customer support.

- 5 Ring Chandelier Unit (pre-assembled)
- Remote Control
- LED Dimmable Light Source (integrated)
- Installation Hardware (ceiling plate, screws, wire connectors)
- Instruction Manual

PRODUCT SPECIFICATIONS

Feature	Specification
Brand	IDEQUY
Model Number	CF8022-246810
Color	Silver
Material	Stainless Steel + Crystal
Style	Modern Chandelier
Product Dimensions	40"L x 40"W x 138"H (Max adjustable height)
Ring Sizes	D8", D15.7", D23.6", D31.5", D39.4"
Power Source	AC 85V-256V (Universal)
Wattage	300 Watts
Brightness	27000 Lumens
Color Temperature	3000K-6000K (Dimmable)
Control Method	Remote Control, Wall Switch, APP (LampSmart pro)
Installation Type	Flush Mount
Item Weight	73.6 pounds



Image: Product dimensions and ceiling plate details.

SETUP AND INSTALLATION

The chandelier is largely pre-assembled to simplify installation. Professional installation is recommended for safety and optimal performance, especially for high ceilings.

Installation Steps:

1. **Prepare for Installation:** Turn off power at the circuit breaker. Ensure the mounting surface can support the chandelier's weight (approximately 73.6 lbs).
2. **Unpack Components:** Carefully remove all parts from the packaging. Inspect for any damage.
3. **Mount Ceiling Plate:** Secure the ceiling plate to the junction box using the provided screws. Ensure it is firmly attached. Remove the gray-blue protective film from the ceiling plate after installation to prevent scratches.
4. **Connect Wiring:** Connect the chandelier's wires to your household electrical wires according to local electrical codes. Typically, this involves connecting live to live, neutral to neutral, and ground to ground. Use appropriate wire connectors.
5. **Adjust Cable Length:** The chandelier's cable length is adjustable up to 138 inches (350 cm). Adjust

each ring's suspension cable to achieve your desired height and arrangement. Ensure all cables are securely fastened.

6. **Secure Chandelier:** Carefully lift and secure the chandelier unit to the mounted ceiling plate. Ensure all connections are tight and stable.
7. **Final Check:** Double-check all connections and ensure the chandelier is securely hung.



Image: Detail of the ceiling plate and wiring area, highlighting the protective film removal.

Note: The chandelier is designed for flush mount installation. The cable length for each ring can be individually adjusted to create various aesthetic configurations.

OPERATING INSTRUCTIONS

Your IDEQUY 5 Ring Chandelier features integrated LED lighting with adjustable color temperature and brightness, controlled via remote, wall switch, or a mobile application.

Control Methods:

- **Remote Control:** Use the included remote control to power the chandelier on/off, adjust brightness (5%-

100%), and change color temperature (3000K-6000K).

- **Wall Switch:** A standard wall switch can turn the chandelier on/off. Repeatedly toggling the wall switch may cycle through different color temperatures (e.g., warm white, neutral white, cool white).
- **Mobile App (LampSmart pro):** Download the 'LampSmart pro' application to your smartphone for advanced control, including precise brightness and color temperature adjustments. Follow the app's instructions for pairing.

IMPORTANT: This chandelier has an internal dimming system. Do not use it with an external dimmer switch or dimming system on your wall. Doing so will cause malfunction and void the warranty.



Image: Remote control and mobile app for chandelier operation.



Color Temperature Range: 2700K-6000K

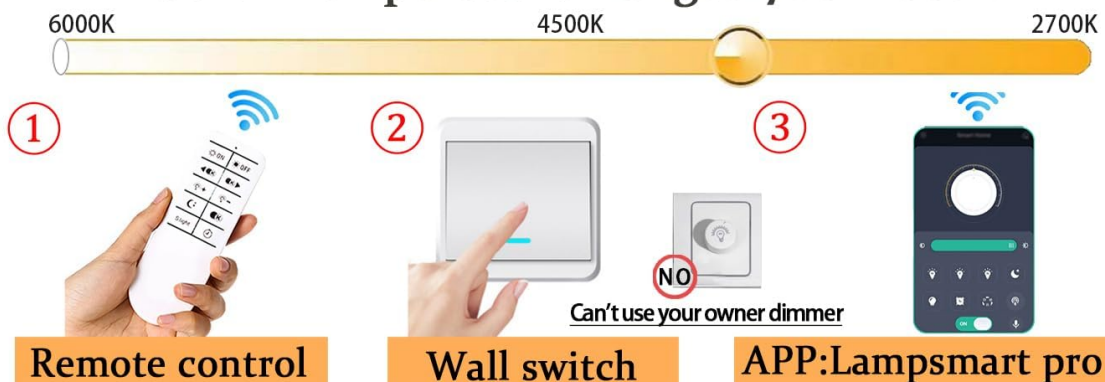


Image: Color temperature adjustment range (2700K-6000K).

Video: This video demonstrates the various lighting modes and color temperature changes of the IDEQUY 5 Ring Chandelier, showcasing its versatility in different settings.

MAINTENANCE

Regular cleaning will help maintain the appearance and performance of your chandelier.

- **Cleaning:** Ensure the power is off before cleaning. Use a soft, dry, or slightly damp cloth to wipe the stainless steel frame. For crystal components, use a soft, lint-free cloth and a mild glass cleaner. Avoid abrasive cleaners or solvents that could damage the finish or crystals.
- **Bulb Replacement:** The LED light source is integrated and not user-replaceable. If the LEDs malfunction, contact customer support for assistance.
- **Inspection:** Periodically check all connections and suspension cables for tightness and security.

TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Chandelier does not light up	No power supply, loose wiring, faulty remote/app.	Check circuit breaker. Ensure all wiring connections are secure. Verify remote control batteries or app connection.
Light flickers or dims unexpectedly	Incompatible external dimmer, unstable power, loose connection.	Ensure no external dimmer switch is used. Check power supply stability. Verify wiring connections.
Remote control or app not working	Dead batteries, pairing issue, signal interference.	Replace remote batteries. Re-pair the remote/app according to instructions (if applicable). Reduce interference.
Cannot change color temperature or brightness	Incorrect control method, internal dimmer malfunction.	Use the remote or app for full control. If using a wall switch, cycle it to change color temperature. If issues persist, contact support.

If troubleshooting steps do not resolve the issue, please contact IDEQUY customer support.

WARRANTY AND SUPPORT

IDEQUY provides an **8-year warranty** for this chandelier. This warranty covers manufacturing defects and significant malfunctions under normal use.

In case of damaged or missing parts during transportation, free replacements will be provided. For any questions or concerns regarding your chandelier, our professional engineer team offers **24 hours online service**.

Please contact IDEQUY customer support through the retailer's platform or the contact information provided with your purchase for assistance.