



[Manuals.plus](#) /

> [Lightinginside](#) /

> Lightinginside Smart Plug User Manual

Lightinginside LID03

Lightinginside Smart Plug User Manual

Model: LID03

Compatible with Alexa and Google Assistant

1. INTRODUCTION

Thank you for choosing the Lightinginside Smart Plug. This device allows you to control your home electronics and appliances remotely via an app, voice commands, and set up automated schedules. This manual provides detailed instructions for setting up, operating, and troubleshooting your smart plugs to ensure a seamless smart home experience.

2. SAFETY INFORMATION

Please read all safety instructions before using the device. Failure to follow these instructions may result in electric shock, fire, or other hazards.

- The smart plug is designed for indoor use only.
- Do not expose the device to water or moisture.
- Do not disassemble or modify the device.
- Ensure the connected appliance's power consumption does not exceed the smart plug's maximum load (10A 1200W).
- The smart plug features multiple safety protections including fireproof resistance, overload protection, surge protection, short circuit protection, grounded protection, thunder protection, and over-voltage protection.
- The product is ETL and FCC certified, ensuring compliance with safety standards.

3. PRODUCT OVERVIEW

The Lightinginside Smart Plug is a compact and versatile device designed to make your ordinary electronic devices smart. It connects to your home's 2.4GHz Wi-Fi network, enabling remote control and automation.



Image: Four Lightinginside Smart Plugs with their retail packaging, illustrating the product's compact design and the quantity included in the pack.


Key Features:

- **Easy Setup:** No hub required, connects directly to 2.4GHz Wi-Fi.
- **App Remote Control:** Control devices from anywhere using the Smart Life App.
- **Voice Control:** Compatible with Alexa and Google Assistant for hands-free operation.
- **Timer and Schedule:** Create custom schedules to automate power on/off times.
- **Group Control:** Control multiple smart plugs simultaneously by grouping them in the app.
- **Safety Design:** Built with fireproof PC + ABS material and multiple safety protections.

SMART PLUG



28mm / 1.10in

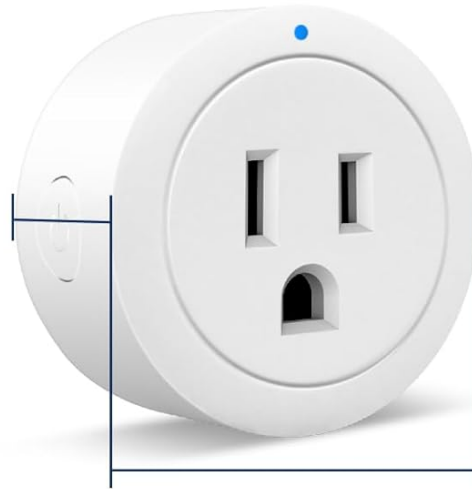

50mm / 1.97in



10A 1200W
Max Load



Overload
Protection



Flame
Retardant



APP Remote
Control



Voice
Control



Group
Control



Timer



2.4G Wi-Fi

Image: A detailed diagram of the smart plug, highlighting its dimensions (50mm / 1.97in diameter, 28mm / 1.10in depth), ETL and FCC certifications, and icons representing features like 10A 1200W Max Load, Overload Protection, Flame Retardant, APP Remote Control, Voice Control, Group Control, Timer, and 2.4G Wi-Fi compatibility.

4. SETUP GUIDE

Follow these steps to set up your Lightinginside Smart Plug:

1. **Download the Smart Life App:** Search for "Smart Life" in your smartphone's app store (iOS or Android) and download the application.
2. **Register/Log In:** Open the Smart Life App and register a new account or log in if you already have one.
3. **Plug In the Smart Plug:** Insert the smart plug into a standard wall outlet. The indicator light on the plug should start blinking rapidly. If it's not blinking, press and hold the power button on the side of the plug for 5-10 seconds until it starts blinking rapidly.
4. **Add Device in App:** In the Smart Life App, tap the "+" icon in the top right corner to add a device. Select "Electrical Outlet" or "Socket (Wi-Fi)" from the device list.

5. **Connect to Wi-Fi:** Confirm that the indicator light on the smart plug is blinking rapidly. Enter your 2.4GHz Wi-Fi network password. **Note:** The smart plug only supports 2.4GHz Wi-Fi networks. If your router broadcasts both 2.4GHz and 5GHz networks with the same SSID, you may need to temporarily disable the 5GHz band during setup or ensure your phone is connected to the 2.4GHz band.
6. **Pairing:** The app will begin connecting to the smart plug. Once connected, you can rename the device for easier identification (e.g., "Living Room Lamp," "Coffee Maker").
7. **Complete Setup:** Your smart plug is now ready for use. You can control it directly from the Smart Life App.

5. OPERATION

5.1 App Remote Control

Control your smart plug from anywhere with an internet connection using the Smart Life App. This feature provides convenience and enhanced home security.

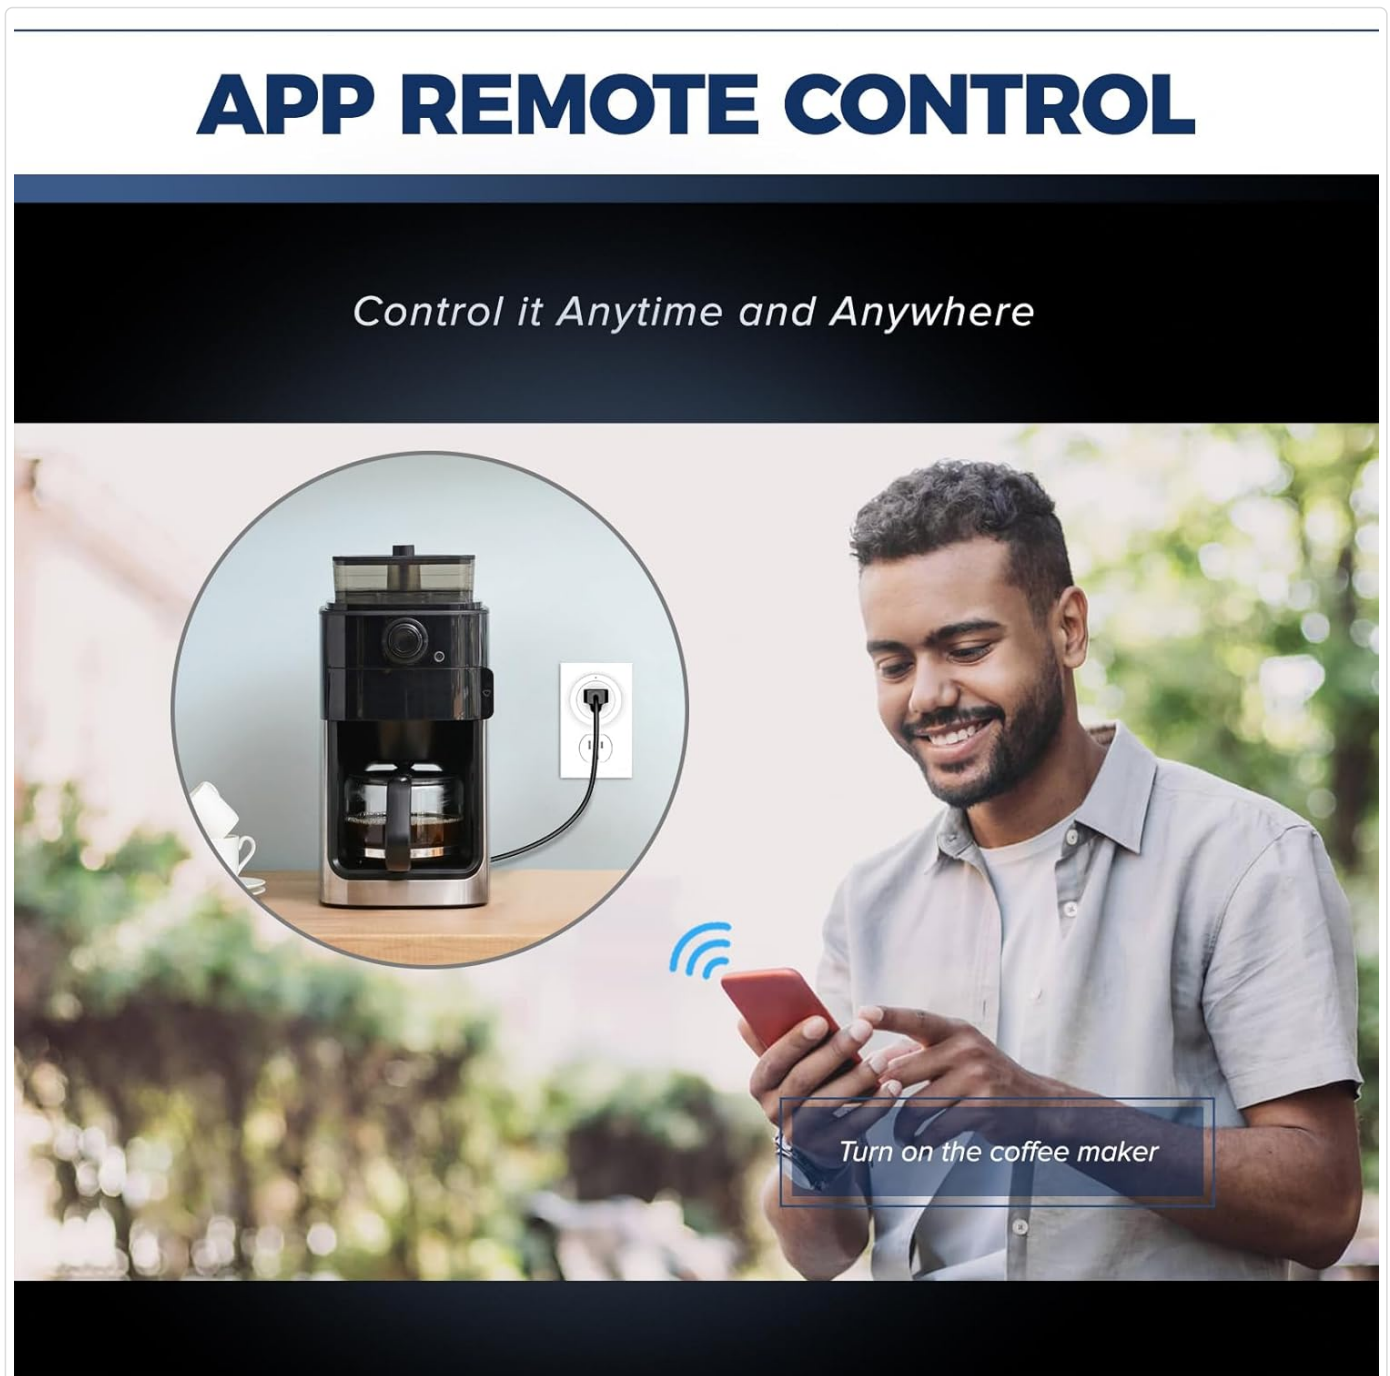


Image: A man outdoors, smiling and looking at his smartphone, with a thought bubble showing a coffee maker plugged into a smart outlet, indicating remote control functionality. The text "Turn on the coffee maker" is displayed, demonstrating the ease of app control.

APP REMOTE CONTROL



Image: A woman smiling while looking at her smartphone, with a dog drinking from a pet water fountain in the foreground. This illustrates the convenience of using the app to remotely control various household devices, including pet care items.

5.2 Voice Control

Integrate your smart plug with Amazon Alexa or Google Assistant for hands-free control. Follow the instructions within the Smart Life App to link your account with your preferred voice assistant.

- Once linked, you can use commands like:
- "Alexa, turn on the living room lamp."
- "Hey Google, turn off the coffee maker."

HANDS-FREE CONTROL

Enjoy your smart life with voice commands



Image: A woman comfortably reading in bed, with an Amazon Echo device visible on her bedside table. This scene highlights the convenience of using voice commands to control smart devices, such as a lamp connected to a smart plug, without needing to physically interact with them.



HANDS-FREE CONTROL

*ENJOY YOUR SMART
LIFE WITH VOICE
COMMANDS*

Image: A family enjoying time together in a living room, with an Amazon Echo device prominently placed on a coffee table. This depicts how voice control seamlessly integrates into daily family life, allowing for easy management of smart home devices.

5.3 Timer and Schedule

Automate your devices by setting custom timers and schedules. This can help reduce energy consumption and add convenience to your daily routine.

- **Schedule:** Set specific times for devices to turn on or off (e.g., lights on at dusk, coffee maker on at 7:00 AM).
- **Timer:** Set a countdown timer for a device to turn off after a certain period (e.g., turn off phone charger after 2 hours).

SCHEDULE

Timer & Schedule



Image: A kitchen counter featuring a coffee maker, an electric kettle, and a toaster. Digital labels indicate scheduled turn-on times for each appliance: "Coffee maker 7:00 Turn on," "Kettle 7:20 Turn on," and "Toaster 7:20 Turn on," demonstrating the scheduling capabilities of the smart plug.

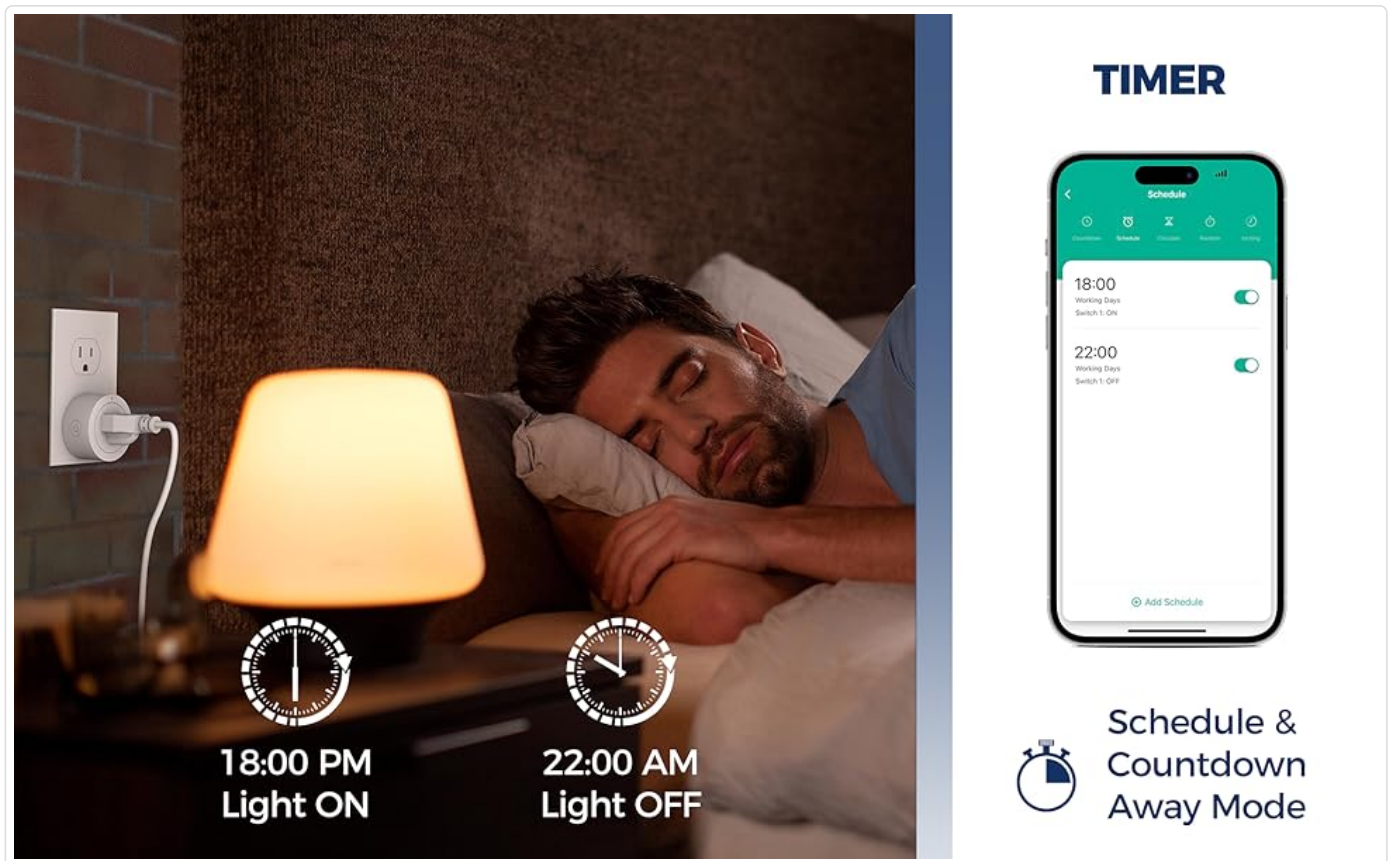


Image: A man sleeping peacefully in bed, with a bedside lamp connected to a smart plug. Clocks indicate "18:00 PM Light ON" and "22:00 AM Light OFF," while a smartphone screen displays the Smart Life app's schedule interface, illustrating how timers and schedules can automate lighting for convenience and energy saving.

5.4 Group Control

For enhanced convenience, you can group multiple smart plugs together in the Smart Life App. This allows you to control several devices with a single command.

- Example: Create a "Living Room" group to turn all lights and fans in that area on or off simultaneously.

GROUP CONTROL

Control Multiple plug All at Once by Putting Them in a Group

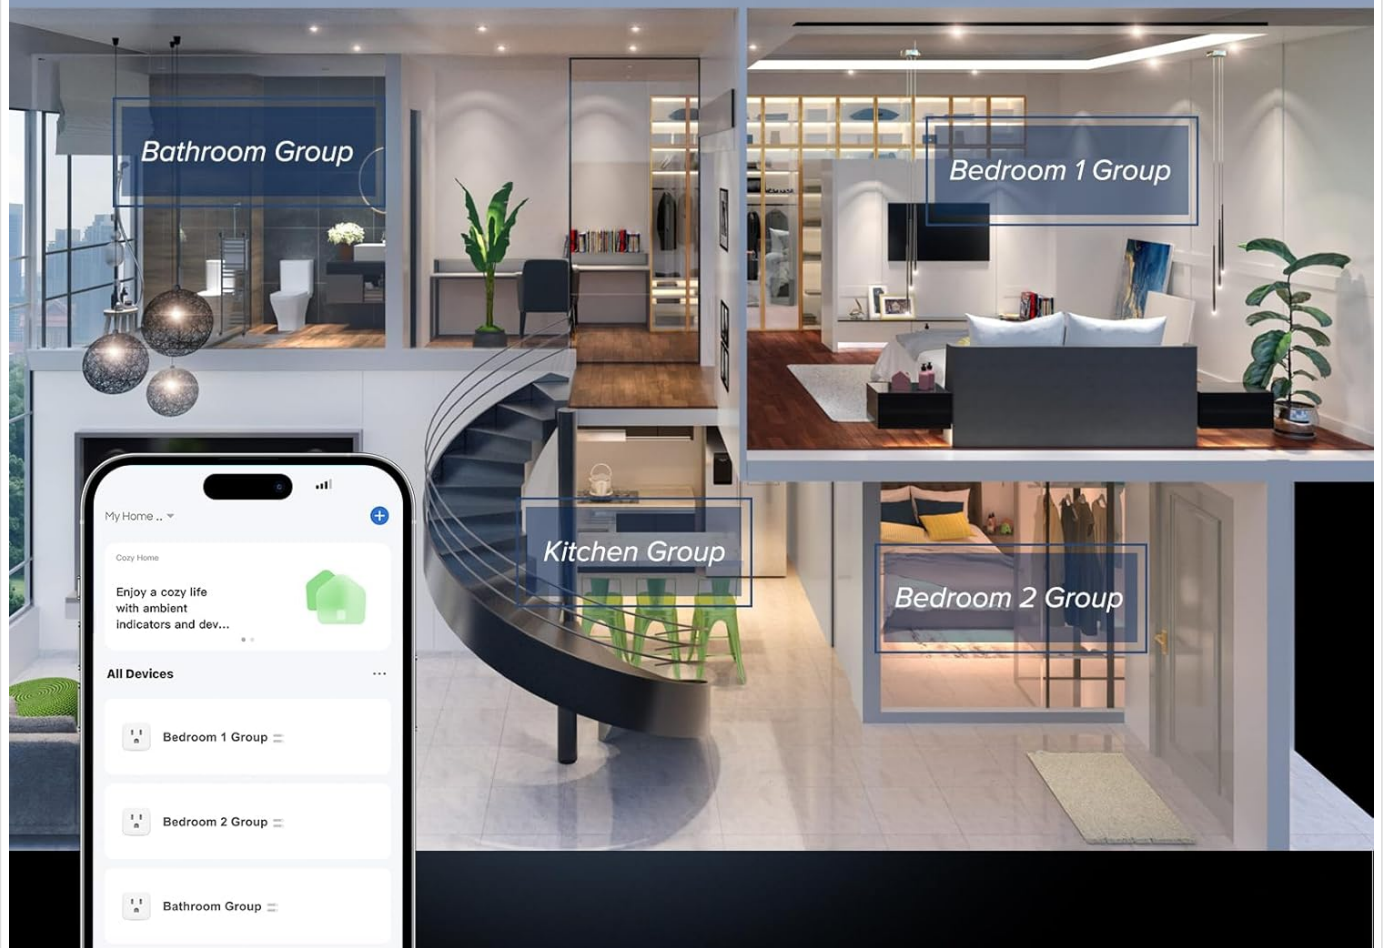


Image: An architectural rendering of a multi-room house interior, visually segmented into areas like "Bathroom Group," "Bedroom 1 Group," "Kitchen Group," and "Bedroom 2 Group." A smartphone screen in the foreground displays the Smart Life app interface, showing these groups, illustrating the ability to control multiple smart plugs simultaneously by organizing them into logical groups.

6. MAINTENANCE

The Lightingside Smart Plug requires minimal maintenance. Follow these guidelines to ensure optimal performance and longevity:

- Keep the device clean by wiping it with a soft, dry cloth.
- Avoid using harsh chemicals or abrasive cleaners.
- Ensure the plug is not exposed to extreme temperatures or humidity.
- Periodically check for firmware updates within the Smart Life App to ensure you have the latest features and security enhancements.

7. TROUBLESHOOTING

If you encounter issues with your smart plug, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Smart plug not connecting to Wi-Fi.	Incorrect Wi-Fi band (not 2.4GHz), incorrect password, weak signal, router settings.	Ensure your Wi-Fi is 2.4GHz. Check Wi-Fi password. Move the plug closer to the router. Temporarily disable 5GHz band on your router during setup if they share the same SSID.
Device offline in app.	Wi-Fi disconnected, power outage, plug unplugged.	Check your Wi-Fi connection. Ensure the smart plug is powered on and plugged in securely. Re-add the device if necessary.
Voice control not working.	Incorrect linking with voice assistant, device name not recognized, internet issue.	Verify the Smart Life account is correctly linked to Alexa/Google Assistant. Try renaming the device to something simpler. Check your internet connection.
Plug not responding.	Overload, internal error.	Unplug the device, wait 10 seconds, and plug it back in. Ensure the connected appliance does not exceed the maximum load.

8. SPECIFICATIONS

Detailed technical specifications for the Lightinginside Smart Plug (Model LID03):

- **Model Number:** LID03
- **Brand:** Lightinginside
- **Material:** Plastic (PC + ABS)
- **Connector Type:** Plug in
- **No. of Wires:** 3
- **Plug Format:** Type B
- **Max Load:** 10A / 1200W
- **Wi-Fi Standard:** 2.4 GHz Wi-Fi only
- **Certifications:** ETL, FCC
- **Package Dimensions:** 4.61 x 4.61 x 2.24 inches
- **Item Weight:** 9.14 ounces
- **First Available Date:** July 18, 2023

9. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the product packaging or contact Lightinginside directly through their official website or the retailer where the product was purchased. Keep your purchase receipt as proof of purchase for any warranty claims.

For technical assistance or further inquiries, please visit the Lightinginside store page on Amazon or contact their customer service.

Lightinginside Store: <https://www.amazon.com/stores/Lightinginside/page/7FD1C966-52B6-411E-A14C-C3B64DA22A46>

