

[Manuals.plus](#) /

› [VRURC](#) /

› VRURC Portable Charger User Manual

VRURC T1159 Pink

VRURC Portable Charger User Manual

Model: T1159 Pink | Brand: VRURC

1. INTRODUCTION

Thank you for choosing the VRURC Portable Charger. This 10000mAh power bank is designed for convenience and efficiency, featuring built-in charging cables and an integrated AC wall plug. It supports 22.5W fast charging, making it an ideal companion for keeping your devices powered on the go. This manual provides essential information for safe and effective use of your portable charger.



Figure 1: VRURC Portable Charger (Pink)

2. KEY FEATURES

- **Built-in Fast Charging Cables and AC Plug:** Equipped with a 20W cable for iPhone, a 22.5W Type-C cable for Samsung and other compatible devices, and a 12W Micro cable for Android devices. The integrated AC wall plug (100V-240V) allows for direct charging from an outlet, eliminating the need for extra adapters.

Portable 10000mAh Power Bank For Travel

Built-in Type-C cable, Micro cable, iPhone Cable and USB-A port



No need carry extra cables and adapter

Figure 2: Integrated Cables and AC Plug

- **22.5W & 4X Fast Charging:** The 10000mAh capacity power bank can rapidly charge your devices, providing up to 60% battery in approximately 30 minutes for compatible phones. It supports PD3.0 & QC4.0 protocols. The first indicator light turns green when fast charging mode is active.

VRURC Latest 22.5W Power Bank

22.5W USB-A port is 4X fast than ordinary models



30mins

VRURC 22.5W



Other 15W



Figure 3: 22.5W Fast Charging Capability

- **Two Ways Quick Recharge:** The power bank can be fully recharged in approximately 3 hours via the Type-C input port (requires a 9V/2A adapter) or in 5 hours using the built-in AC Wall Plug. A full charge using this method takes approximately 5 hours. This allows for convenient overnight charging of both the power bank and your device.

Two Ways for Quick Recharge

5 hrs

AC Wall Plug



3 hrs

18W Type-C Port

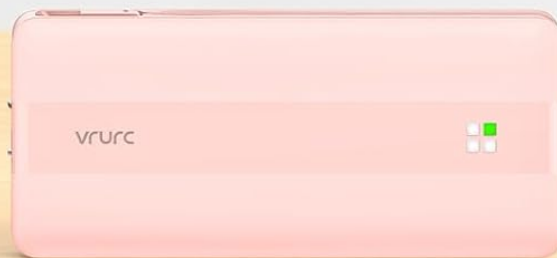


Figure 4: Dual Recharging Options

- **Charging 4 Devices & Portable Size:** With a compact design (5.49 x 2.39 x 0.97 inches) and lightweight (0.54lb), this power bank offers four output options: the three built-in cables and an additional USB-A port, allowing you to charge up to four devices simultaneously.

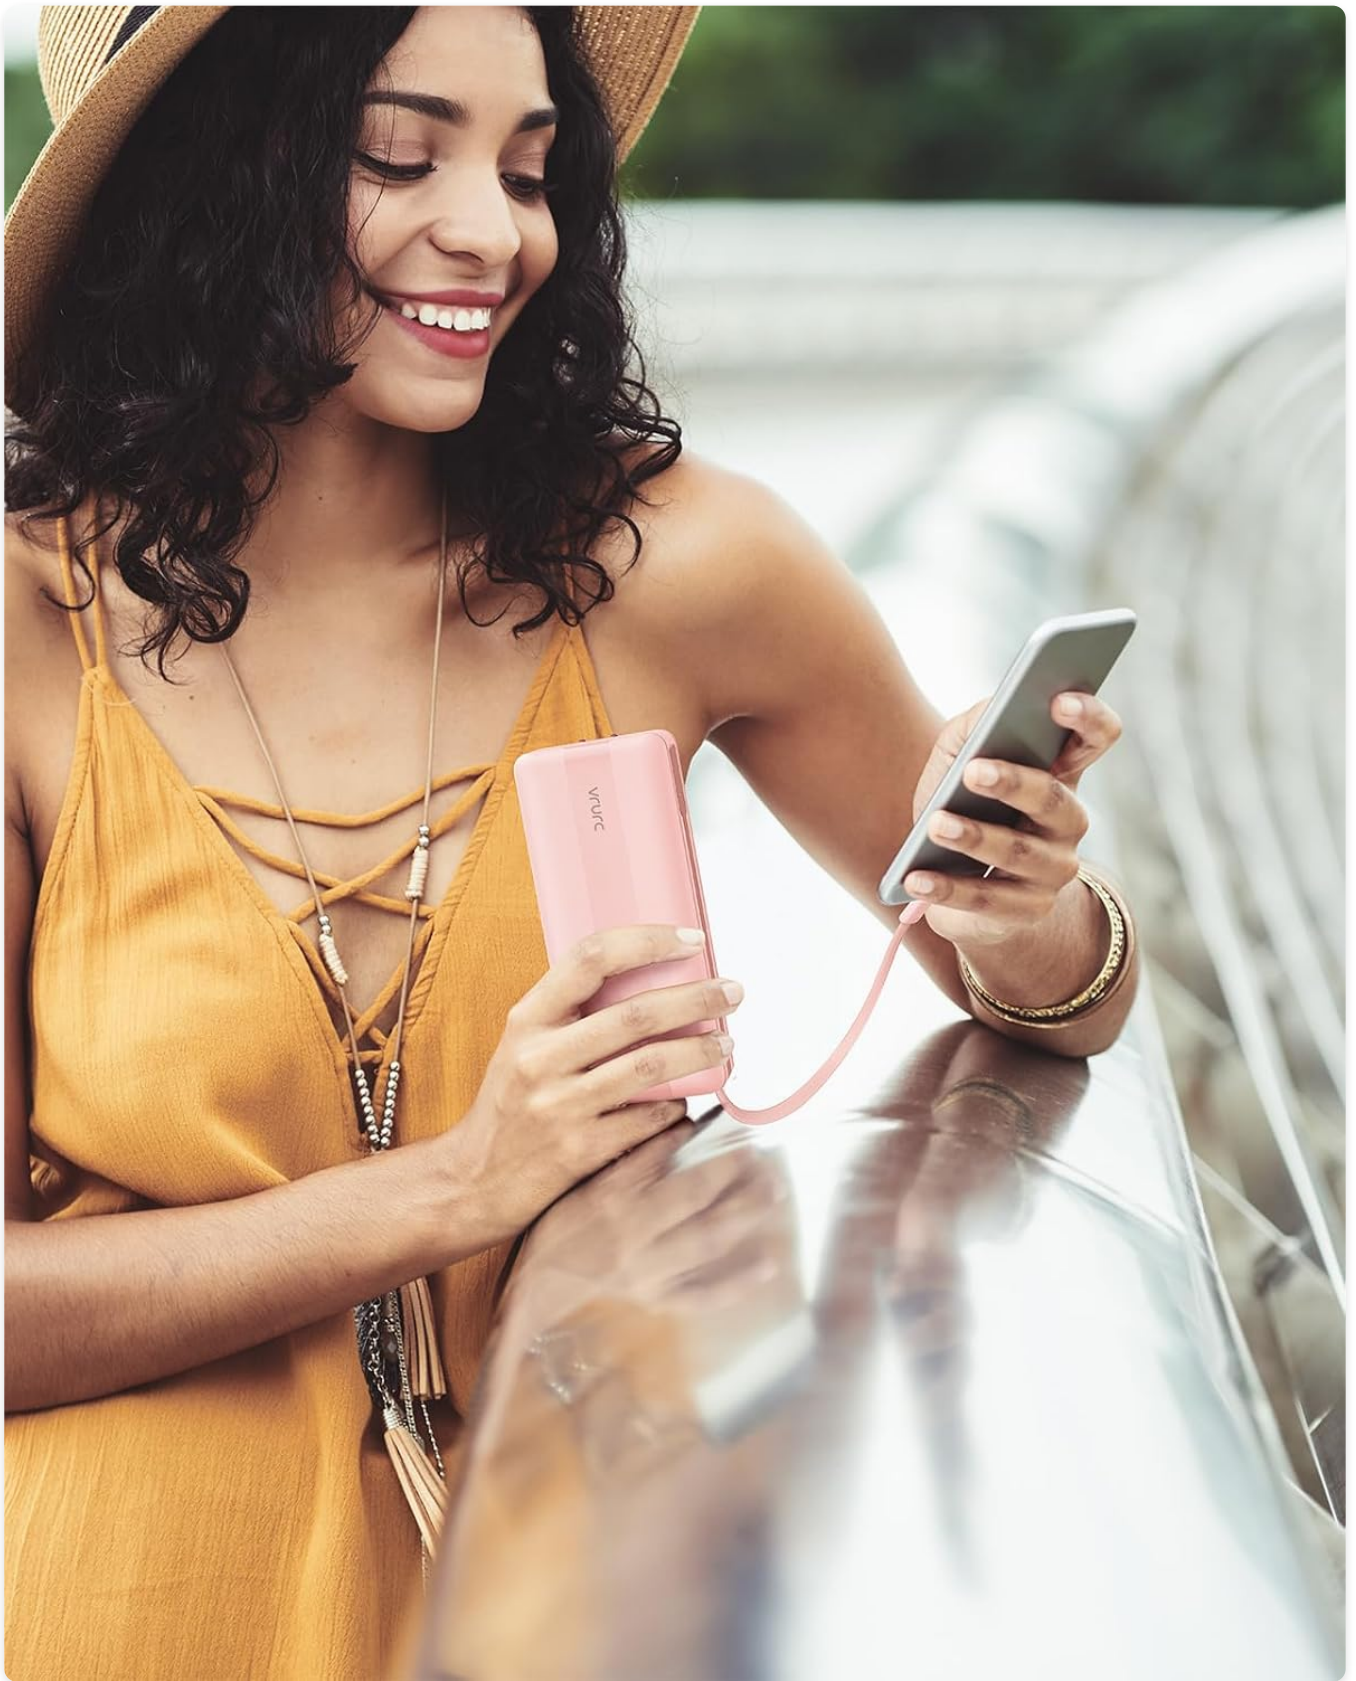


Figure 5: Simultaneous Charging of Four Devices

- **Safe Charging & Reliable:** Features a 2022 upgraded smart chip with 4.5V/5V/9V/12V modes. It intelligently identifies your device and adjusts the charging mode to prevent over-charge, over-current, over-voltage, and over-heating, ensuring the safety of your devices.
- **Included Accessories:** Comes with a safer lithium polymer battery, a user manual, and a travel pouch for convenient portability.

3. SETUP

3.1 Unboxing

Upon opening the package, ensure you have the following items:

- VRURC 10000mAh Portable Charger
- User Manual (this document)
- Travel Pouch

3.2 Initial Charge of the Power Bank

Before first use, it is recommended to fully charge your VRURC Portable Charger.

1. **Using the AC Wall Plug:** Fold out the integrated AC wall plug from the side of the power bank. Plug the power bank directly into a standard wall outlet (100V-240V). The charging indicator lights will illuminate, showing the charging progress. A full charge via AC wall plug takes approximately 5 hours.

Built-in Foldable AC Wall Plug

with AC plug input and USB-A port output same time



90° Folding Plug



3C Safety
Certification



0-25%



25-50%



50-75%



75-100%

Figure 6: Charging via Built-in AC Wall Plug

2. Using the Type-C Input Port: Alternatively, you can use a Type-C cable and a 9V/2A adapter (not included) to charge the power bank via its Type-C input port. A full charge using this method takes approximately 3 hours.

Video 1: Demonstrates two ways to fast recharge the VRURC Power Bank, showing it can be fully charged in 3 or 5 hours depending on the method.

4. OPERATION

4.1 Charging Your Devices

The VRURC Portable Charger offers multiple ways to charge your electronic devices:

- **Using Built-in Cables:** Extend the appropriate built-in cable (Lightning for iPhone, Type-C for Samsung/Android, Micro for older Android devices) and connect it to your device's charging port.
- **Using the USB-A Port:** For devices requiring a standard USB-A connection, plug your own USB cable into the power bank's USB-A output port and connect the other end to your device.
- **Fast Charging Indicator:** When a compatible device is connected and fast charging is active, the first indicator light on the power bank will turn green. If your device does not support fast charging, the power bank will charge it at a standard rate.
- **Simultaneous Charging:** You can charge up to four devices at once by utilizing all three built-in cables and the USB-A port.

Video 2: Overview of the VRURC 22.5W Portable Charger with built-in cables and wall plug, demonstrating its versatility.

4.2 Trickle-Charging Mode (Low Current Mode)

This mode is ideal for charging low-power devices such as Bluetooth earbuds, smartwatches, or fitness trackers, which require a lower current to prevent overcharging and damage.

1. To activate trickle-charging mode, **long press the power button for 2 seconds**.
2. The LED indicator lights will cycle every 5 seconds, indicating that the power bank is in low-current mode.
3. To exit trickle-charging mode, **long press the power button for 2 seconds again**.

Video 3: Demonstrates how to change to low current mode for charging small devices.

5. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the surface of the power bank. Avoid using harsh chemicals or abrasive materials.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight, extreme temperatures, and humidity.
- **Battery Care:** To prolong battery life, avoid fully discharging the power bank frequently. Recharge it regularly, even if not in use, to maintain optimal performance.
- **Travel Pouch:** Utilize the included travel pouch to protect your power bank from scratches and minor impacts during transport.

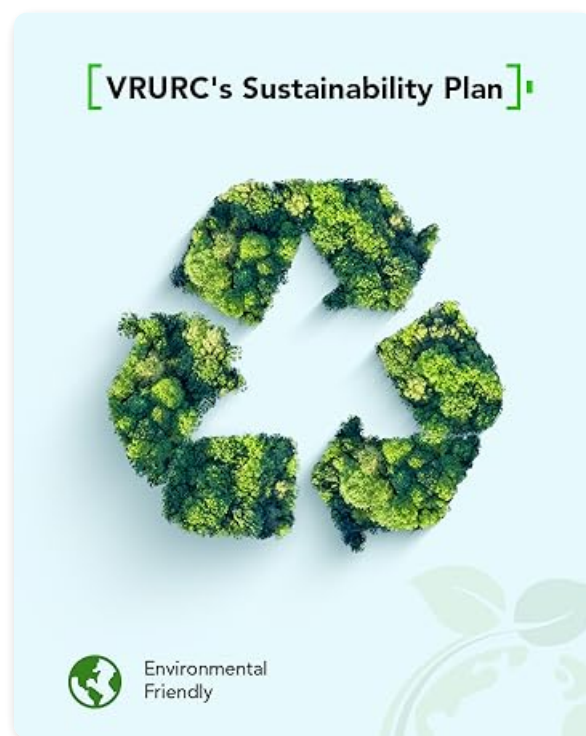


Figure 7: Power Bank with Included Travel Pouch

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Power bank not charging	Loose connection; outlet issue; damaged cable/plug.	Ensure AC plug is fully inserted or Type-C cable is securely connected. Try a different outlet. Inspect cables for damage.
Device not charging from power bank	Power bank low on charge; incorrect cable; device not compatible; loose connection.	Recharge the power bank. Ensure correct built-in cable is used or external USB cable is functional. Check all connections.
Slow charging	Device not fast-charge compatible; cable issue; multiple devices charging.	Verify device fast charging compatibility. Use original or certified cables. Disconnect other devices to test charging speed.
Power bank overheating	Overload; poor ventilation; internal issue.	Disconnect devices and allow to cool. Ensure adequate ventilation during charging/discharging. If overheating persists, discontinue use and contact support.

7. SPECIFICATIONS

Feature	Detail
---------	--------

Feature	Detail
Model Number	T1159 Pink
Battery Capacity	10000mAh
Product Dimensions	5.49 x 2.39 x 0.97 inches
Item Weight	8.6 ounces
Input (AC Wall Plug)	100V-240V
Input (Type-C)	9V/2A (18W)
Output (Lightning Cable)	20W
Output (Type-C Cable)	22.5W
Output (Micro Cable)	12W
Output (USB-A Port)	22.5W
Special Features	Auto Shut-Off, Built-in Wall Plug, Built-in Cables, Fast Charging, Pocket Size
Battery Type	Lithium Polymer

8. WARRANTY AND SUPPORT

Your VRURC Portable Charger comes with a **12-month replacement service**, ensuring peace of mind regarding your purchase.

For any questions, technical support, or warranty claims, please refer to the contact information provided on the product packaging or visit the official VRURC website. Please have your model number (T1159 Pink) and purchase details ready when contacting support.

© 2024 VRURC. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question