

DINUY PT Sup EL4

DINUY PT Sup EL4 3-Wire Tactile Push-Button Timer Instruction Manual

Model: PT Sup EL4

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, correct operation, and proper maintenance of the DINUY PT Sup EL4 3-Wire Tactile Push-Button Timer. Please read this manual thoroughly before attempting any installation or operation to ensure optimal performance and safety. Keep this manual for future reference.

2. SAFETY INFORMATION

WARNING: Electrical installation should only be performed by a qualified and licensed electrician.

- Always disconnect power at the main circuit breaker before performing any installation, maintenance, or troubleshooting.
- Verify that the supply voltage matches the specifications of the device (230 V AC, 50 Hz).
- Do not install in wet or damp locations. The device has an IP20 protection rating, suitable for indoor dry environments.
- Ensure all wiring connections are secure and correctly insulated to prevent short circuits or electric shock.
- Failure to follow these instructions may result in electric shock, fire, serious injury, or property damage.

3. PRODUCT OVERVIEW AND FEATURES

The DINUY PT Sup EL4 is a sophisticated 3-wire tactile push-button timer designed for controlling various types of lighting fixtures. Its modern design and advanced features make it suitable for a wide range of residential and commercial applications.



Figure 1: Front view of the DINUY PT Sup EL4 Tactile Push-Button Timer. This image shows the white square-shaped device with a central power symbol, a small blue LED indicator, and two visible mounting screws.

Key Features:

- **3-Wire Installation:** Requires Phase (L), Neutral (N), and Lamp Return (L') for connection.
- **Universal Compatibility:** Suitable for all types of luminaires, including LED lamps, incandescent, halogen (230V and 12V with electronic/ferromagnetic transformers), and fluorescent lamps.
- **Tactile Operation:** Easy and intuitive control with a gentle touch.
- **Adjustable Timer:** Configurable timing from 30 seconds to 12 minutes.
- **Rearmable Function:** The timer can be reset at any point during its cycle by another touch.
- **Permanent Luminous LED:** An integrated LED remains illuminated, indicating the device's status and aiding visibility in the dark.
- **Surface Mounting:** Designed for easy surface wall installation.
- **Security Screws:** Includes screws designed to deter unauthorized removal.
- **Zero-Crossing Detection:** Enhances relay life and reduces electrical noise.
- **Contactor Support:** Can be used in conjunction with a contactor for higher load applications.

4. INSTALLATION INSTRUCTIONS

Before beginning installation, ensure the main power supply to the circuit is turned OFF at the circuit breaker. This device is designed for surface mounting in a universal box.

4.1 Wiring Diagram

The DINUY PT Sup EL4 requires a 3-wire connection. Refer to the diagram below for correct wiring.

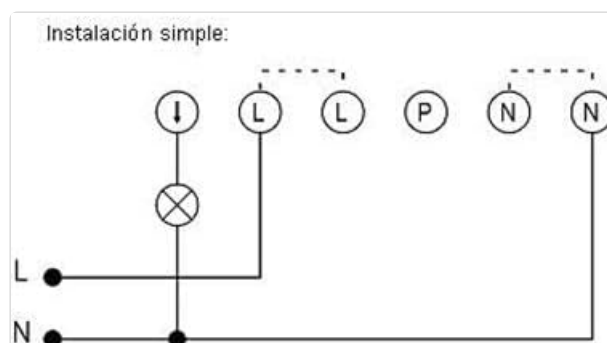


Figure 2: Wiring diagram for the DINUY PT Sup EL4. The diagram illustrates a 3-wire connection: 'L' for Phase, 'N' for Neutral, and a connection to the lamp. The dashed lines indicate optional connections for additional push-buttons (L) or neutral (N) connections.

- Connect the **Phase (L)** wire from the electrical supply to the terminal marked 'L' on the device.
- Connect the **Neutral (N)** wire from the electrical supply to the terminal marked 'N' on the device.
- Connect the **Lamp Return (L')** wire (the wire going to the light fixture) to the terminal indicated by the lamp symbol (often labeled with an arrow pointing down to a circle with an 'X').
- Ensure all connections are tight and secure.

4.2 Mounting

1. After wiring, carefully place the device into the universal wall box.
2. Secure the device to the wall box using the provided security screws. Do not overtighten.
3. Once mounted, restore power at the main circuit breaker.

5. OPERATING INSTRUCTIONS

5.1 Basic Operation

- To turn on the connected light, gently touch the tactile surface of the push-button. The light will illuminate, and the timer will begin its cycle.
- The integrated blue LED will remain permanently illuminated, indicating the device is powered and ready for operation.

5.2 Timer Function

- Once activated, the light will remain on for the preset duration (adjustable between 30 seconds and 12 minutes).
- To extend the lighting duration, simply touch the tactile surface again at any point during the active timer cycle. This will rearm the timer, restarting the countdown from its full preset duration.
- The light will automatically turn off once the timer cycle completes without being rearmed.

6. MAINTENANCE

The DINUY PT Sup EL4 is designed for long-term, maintenance-free operation. However, periodic cleaning and inspection can help ensure its longevity and proper function.

- **Cleaning:** To clean the surface of the device, use a soft, dry cloth. Do not use abrasive cleaners, solvents, or excessive moisture, as these can damage the finish or internal components.
- **Inspection:** Periodically check the device for any visible damage or loose connections. If any issues are found, disconnect power immediately and consult a qualified electrician.
- **No User-Serviceable Parts:** There are no user-serviceable parts inside the device. Do not attempt to open or repair the unit yourself.

7. TROUBLESHOOTING

If you experience issues with your DINUY PT Sup EL4, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Light does not turn on.	No power to the device. Incorrect wiring. Faulty lamp.	Check the circuit breaker. Ensure power is restored. Verify wiring against the diagram (Section 4.1). Test the lamp with another switch or replace it.
Light stays on permanently or turns off too quickly.	Timer setting issue. Device malfunction.	The timer duration is factory set or adjusted internally. If the behavior is inconsistent with expected operation, consult a qualified electrician. If the issue persists after checking power and wiring, the device may require professional inspection.
Blue LED indicator is off.	No power to the device.	Check the circuit breaker and ensure power is supplied to the device.

If these steps do not resolve the issue, contact a qualified electrician or the manufacturer's support for assistance. Do not attempt to repair the device yourself.

8. DETAILED SPECIFICATIONS

Parameter	Value
Supply Voltage	230 V AC
Frequency	50 Hz
Self-consumption	0.7 W
Relay Cut-off Power	16 A
Max. Load (LED Lamps)	400 W
Max. Load (Incandescent & Halogen 230V)	3000 W
Max. Load (Halogen 12V with Electronic Transformer)	3000 W
Max. Load (Halogen 12V with Ferromagnetic Transformer)	2400 W
Max. Load (Fluorescent Lamps)	1300 W (1300 VA)
Contactor Support	Yes
Zero-Crossing Detection	Yes
Installation Type	3 wires (Phase, Neutral, Lamp Return)
Permanent Lighting Function	No
Stop Warning Function	No
Minimum Timer Duration	30 seconds
Maximum Timer Duration	12 minutes
Timed Switch	No



Parameter	Value
Luminous Push-buttons Support	No
Operating Temperature	0°C to 40°C
Permanent Luminous LED	Yes
Mounting	Universal box, Surface, Security screws
Environmental Protection	IP20 (according to UNE20324)
Compliance Standards	UNE-EN60669-2-1 and UNE-EN60669-2-3

9. WARRANTY AND SUPPORT


Specific warranty information for the DINUY PT Sup EL4 is typically provided at the point of purchase or within the product packaging. Please refer to your purchase documentation for details regarding warranty coverage and duration.

For technical support, troubleshooting assistance beyond what is provided in this manual, or warranty claims, please contact your retailer or the official DINUY customer service. Contact information can usually be found on the manufacturer's website or product packaging.

Related Documents - PT Sup EL4

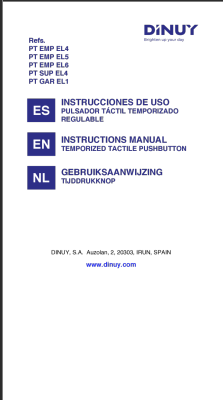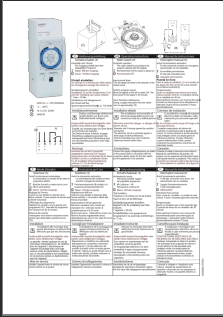	DINUY Temporized Tactile Pushbutton - Installation and User Manual Comprehensive manual for DINUY's Temporized Tactile Pushbutton, covering installation, technical specifications, and operation for models like PT EMP EL4, PT SUP EL4, and PT GAR EL1.
	DINUY IHEMT 1328 Timer Switch User Manual User manual for the DINUY IHEMT 1328 timer switch, providing operating instructions, installation guidelines, and connection diagrams in multiple languages.

DINUY DECLARACIÓN DE CONFORMIDAD CE DINUY, S.A. es responsable, según la Ley 36/2002 (R.D. 1303/2002) de la conformidad de los productos que se declaran. <table border="1"> <tr> <td>Modelo</td> <td>REGULADOR UNIV. PLANTA 400 W</td> </tr> <tr> <td>Referencia</td> <td>REGULADOR UNIV. PLANTA 400 W</td> </tr> </table> Declaración de conformidad de acuerdo con las siguientes directivas: Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD	Modelo	REGULADOR UNIV. PLANTA 400 W	Referencia	REGULADOR UNIV. PLANTA 400 W	Declaración de Conformidad CE - Regulador Univ. Planta 400 W. DINUY Documento de Declaración de Conformidad CE para el Regulador Univ. Planta 400 W. (RE PLA 000) fabricado por DINUY, S.A., cumpliendo directivas europeas y normas aplicables.
Modelo	REGULADOR UNIV. PLANTA 400 W				
Referencia	REGULADOR UNIV. PLANTA 400 W				
DINUY DECLARACIÓN DE CONFORMIDAD CE DINUY, S.A. es responsable, según la Ley 36/2002 (R.D. 1303/2002) de la conformidad de los productos que se declaran. <table border="1"> <tr> <td>Modelo</td> <td>DINUY TI BI2 012</td> </tr> <tr> <td>Referencia</td> <td>DINUY TI BI2 012</td> </tr> </table> Declaración de conformidad de acuerdo con las siguientes directivas: Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) Directiva 2002/95/CE (RoHS) Directiva 2004/108/CE (CEM) Directiva 2006/96/CE (EMC) DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD DECLARACIÓN DE CONFORMIDAD	Modelo	DINUY TI BI2 012	Referencia	DINUY TI BI2 012	Declaración de Conformidad CE - DINUY TI BI2 012 Timbre BISON 2000 12V Documento de Declaración de Conformidad CE para el producto DINUY TI BI2 012 Timbre BISON 2000 12V, emitido por DINUY, S.A., detallando el cumplimiento de las directivas de Compatibilidad Electromagnética y Restricción de Sustancias Peligrosas (RoHS), y normas aplicables.
Modelo	DINUY TI BI2 012				
Referencia	DINUY TI BI2 012				
ES EN PT DINUY Referencia: TI CLB 000 / TI B18 000 / TI B28 000 / TI B28 012 / TI B28 010 / TI B28 011 / TI B28 012 / TI B28 013 / TI B28 014 / TI B28 015 / TI B28 016 / TI B28 017 / TI B28 018 / TI B28 019 / TI B28 020 / TI B28 021 / TI B28 022 / TI B28 023 / TI B28 024 INSTALACIÓN INSTALLATION INSTALAÇÃO 1- Insertar Insert Insertar 2- Levantar Get up Levantar Agujeros para instalación en caja de empotrar universal. Holes for installation in universal flush box. Furos para instalação em caixa de embutir universal. Agujeros para instalación en superficie. Holes for surface installation. Furos para instalação em superfície. INSTALACIÓN ELÉCTRICA ELECTRICAL INSTALLATION INSTALAÇÃO ELÉTRICA 1- Ensamblar los hilos que se muestran en el diagrama. To fit the wires you have to stop pressing the tabs. Ensamblar os fios que se mostram no diagrama. 2- Fijar los hilos que se muestran en el diagrama. To fasten the wires you have to stop pressing the tabs. Fixar os fios que se mostram no diagrama. DINUY, S.A. Avda. de la Libertad, 2. 03003. BURLADA, SPAIN www.dinuy.com	DINUY Electrical Device Installation Guide Step-by-step installation instructions for DINUY electrical devices, covering mounting and wiring. Includes model numbers and connection details.				

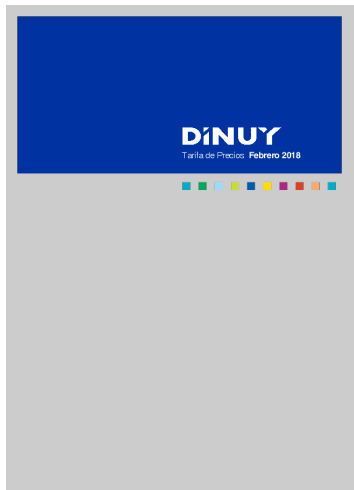

[\[pdf\]](#)

Tarifas DINUY 2018 dinuy documentacion Tarifa de Precios Febrero |||

Tarifa de Precios Febrero 2018 NOVEDADES REGULADORES DE INTENSIDAD
Nueva solucin para Imparas LEDL. Fluorescencia LEDs Admite Contactador PT
GAR 001 PT GAR EL1 PT EMP 004 PT EMP EL4 PT SUP 004 **PT SUP EL4** PT EMP
005 PT EMP EL5 Pulsadores temporizados tctiles REFERENCIA MODELO
CAPACIDAD DE...

lang:es score:23 filesize: 4.53 M page_count: 16 document date: 2018-01-23




[\[pdf\]](#)

TARIFA PVP 2020 Tarifa de Precios Dinuy Reguladores Knx Sensores movimiento TARIFA2020 1 dinuy
2021 10 |||

Tarifa de Precios Febrero 2020 INDICE REGULADORES DE INTENSIDAD
REGULADORES E INTERRUPTORES BLUE ... PT GAR 001 PT GAR EL1 PT EMP
004 PT EMP 005 PT EMP 006 PT SUP 004 PT EMP EL4 PT EMP EL5 PT EMP EL6
PT SUP EL4 Empotrable. 2 Hilos. Blanco Empotrable. 3 Hilos. Blanco Empotrable. 2
Hilos. Blanco Empo...

lang:i-klngon score:23 filesize: 1.29 M page_count: 20 document date: 2020-01-07

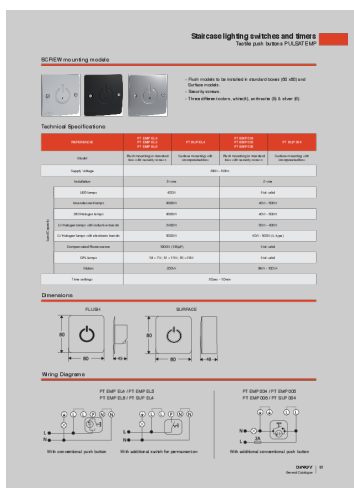


[\[pdf\]](#) Specifications Datasheet Dimension Guide Diagram Catalog

General Catalogue DINUY imac Data sheet SURFACE MOUNTING 2 WIRE TACTILE PUSHBUTTON
PT SUP 004 Dinuy Reguladores Knx Sensores de movimiento EMP Datasheet d7rh5s3nxdmpy4
cloudfront net CMP1490 files |||

SCREW mounting models Staircase lighting switches and timers Tactile push buttons
PULSATEMP - Flush ... RENCIE Model PT EMP EL4 PT EMP EL5 PT EMP EL6
Flush mounting in standard box with security screws **PT SUP EL4** Surface mounting
with incorporated box PT EMP 004 PT EMP 005 PT EMP 006 Flush mounting i...

lang:en score:22 filesize: 216.66 K page_count: 1 document date: 2018-05-08

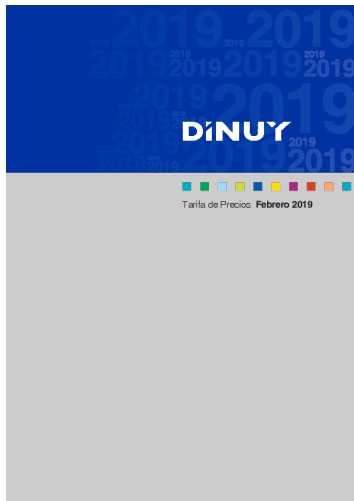

[\[pdf\]](#)

Descargar Tarifa Nueva 2019 Dinuy Reguladores Knx Sensores de movimiento Tarifas DINUY dinuy documentacion CM Electrisur |||

Tarifa de Precios Febrero 2019 NOVEDADES REGULADORES DE INTENSIDAD Nueva solucin para TIRAS LED en ... PT GAR 001 PT GAR EL1 PT EMP 004 PT EMP 005 PT EMP 006 PT SUP 004 PT EMP EL4 PT EMP EL5 PT EMP EL6 **PT SUP EL4** MODELO Empotrable. 2 Hilos. Blanco Empotrable. 3 Hilos. Blanco Empotrable. 2 Hilos. Blan...

lang:es **score:21** filesize: 2.09 M page_count: 16 document date: 2019-01-08




[\[pdf\]](#) Documentation Catalog

PVP octobre 2021 FR Documentation and Catalogues Dinuy Reguladores Knx Sensores de movimiento dinuy 11 |||

Tarif public TAOBECLATDOE PBREREOS2021 INDEX VARIATEURS DINTENSIT VARIATEURS ET INTERRUPTEURS BLUE ... uterie LEDs Admet Contacteur PT GAR PR1 PT GAR 001 PT GAR EL1 PT EMP 004 PT EMP EL4 PT SUP 004 **PT SUP EL4** PT EMP 005 PT EMP EL5 PT EMP 006 PT EMP EL6 REFERENCE MODLE PUISSANCE DE COUPURE MO...

lang:fr **score:21** filesize: 4.05 M page_count: 21 document date: 2021-11-05

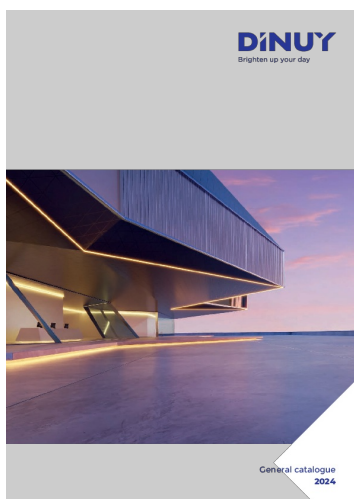


[\[pdf\]](#) Catalog

02459982f1e3200594a15fffb5c65c54 dinuy descargas fichero en 3 |||

General catalogue 2024 DINUY, S.A., founded in 1947, is a family business dedicated to electrical ... of external activation via conventional buttons. LED indicator, which is constantly illuminated. **PT SUP EL4**: two-wire surface. PT SUP 004: three-wire surface with neutral. Examples of use: Corrid...

lang:en **score:21** filesize: 10.24 M page_count: 102 document date: 2024-10-17

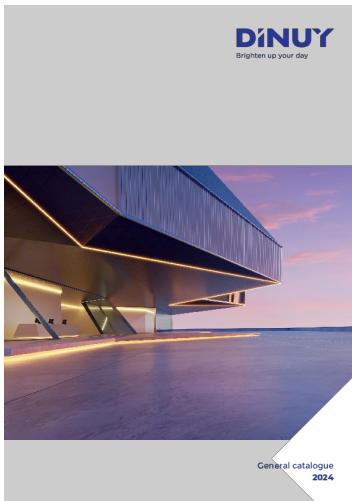

[\[pdf\]](#) Catalog

Downloads Support e2d41936f90752246d1de285a761f764 dinuy descargas fichero en 3 |||

General catalogue 2024 DINUY, S.A., founded in 1947, is a family business dedicated to electrical ... of external activation via conventional buttons. LED indicator, which is constantly illuminated. **PT SUP EL4**: two-wire surface. PT SUP 004: three-wire surface with neutral. Examples of use: Corrid...

lang:en score:21 filesize: 35.24 M page_count: 102 document date: 2024-06-25



[\[pdf\]](#) Catalog

DINUY Catalogo General 2022 Red dinuy 06 Catálogo 3 MB Documentación y Catálogos Dinuy

Reguladores Knx Sensores de movimiento Descargar publica su nuevo Grupo Unase |||

YEARS 1947-2022 Catlogo general 2022 DINUY S.A., fundada en 1947, es una empresa familiar dedica ... ivacin externa mediante pulsadores convencionales. LED indicador, permanece iluminado constante. **PT SUP EL4**: superficie a 2 hilos PT SUP 004: superficie a 3 hilos con neutro. Ejemplos de apicacin...

lang:es score:21 filesize: 7.34 M page_count: 136 document date: 2022-05-30



[\[pdf\]](#)

TARIFA PVP 2021 Tarifa de Precios Dinuy Reguladores Knx Sensores movimiento DINUY 09 dinuy 10 |||

Tarifa de precios Septiembre 2021 NDICE REGULADORES DE INTENSIDAD REGULADORES E INTERRUPTORES BL ... cencia LEDs Admite contactor PT GAR PR1 PT GAR 001 PT GAR EL1 PT EMP 004 PT EMP EL4 PT SUP 004 **PT SUP EL4** PT EMP 005 PT EMP EL5 PT EMP 006 PT EMP EL6 REFERENCIA MODELO CAPACIDAD DE CORTE POR...

lang:i-klngon score:20 filesize: 3.58 M page_count: 22 document date: 2021-09-15



[\[pdf\]](#) Documentation Catalog

PVP octubre 2021 PT Documentation and Catalogues Dinuy Reguladores Knx Sensores de movimiento dinuy 11 OUTUBRO |||

TABELA DE PREÇOS TAOBEULATDUE PBRREOOS2021 NDICE REGULADORES DE INTENSIDADE REGULADORES E INTERRUPT ... ados tcteis PT GAR PR1 PT GAR 001 PT GAR EL1 REFERNCIA MODELO PT EMP 004 PT EMP EL4 PT SUP 004 **PT SUP EL4** PT EMP 005 PT EMP EL5 CAPACIDADE DE CORTE POR TIPO DE CARGA PT GAR PR1 PT GAR 001 PT G...

lang:i-klngon **score:20** filesize: 3.43 M page_count: 23 document date: 2021-11-05

PT EMP EL4, PT EMP EL5, PT EMP EL6 y PT SUP EL4
Pulsador Temporizado Táctil 3 hilos

Descripción

- Pulsador táctil temporizado para instalación en caja de mecanismo universal o en superficie.
- Conexión a 3 hilos, necesita el Neutro.
- Válido para todo tipo de cargas por incluido LEDs y Fluorescencia.
- Controlable en paso por seno, lo que permite la protección de su vida y la conservación de alta potencia.
- Posibilidad de actuación externa mediante pulsadores convencionales.
- Temporización manual en cualquier momento.
- En 4g: función conmutación y función anti-candado.
- LED indicador que permanece iluminado constantemente.
- Ejemplos de aplicación: pasillos, comedores, baños, etc.

Datos Técnicos

	PT EMP EL4	PT EMP EL5	PT EMP EL6	PT SUP EL4
Referencia				
Tensión Alimentación	230V~50Hz			
Montaje	Empotrado en Caja de Mecanismo Universal			Superficial
Color	Blanco	Antirreflexo	Plata	Blanco
Capacidad de Corte	15A cosφ = 1			
• Incandescentes y Halógenos 230V	3000W			
• Halógenos 230V con transformador	2400W			
Fluorescentes	1200W (2x3x1)			
Fluo-Compactas	18x7W, 12x11W, 16x15W, 26x20W, 16x23W			
Lámparas LED	4076			
Máximo	2000W			
Temperatura	30seg - 12min			
Control	Pulsador Táctil y pulsadores convencionales			
Diversidad	80 x 80mm			
Protección Ambiental	IP20, Clase 4			
Temperatura de funcionamiento	0°C - +40°C			

Esquema de Conexión


Más información en: www.dinuy.com

[\[pdf\]](#)

Neme Oliver Ficha técnica PULSADOR TÁCTIL TEMPORIZADO A 3 HILOS EMPOTRABLE PT EMP EL5 Dinuy Reguladores Knx Sensores de movimiento tecnica EL4 5 6 SUP Pulsador Temporizado d7rh5s3nxdmp4 cloudfront net CMP1490 files |||

PT EMP EL4, PT EMP EL5, PT EMP EL6 y **PT SUP EL4** Pulsador Temporizado Tctil 3 hilos Descripcin Pulsador tctil temporizado para instalacin en caja de mecanismo universal o en superficie. Conexin a 3 hilos, necesita el Neutro. Vldo para todo tipo de lmparas, incluido LEDs y Fluorescencia. Conmutac...

lang:es **score:20** filesize: 420.51 K page_count: 1 document date: 2017-11-23

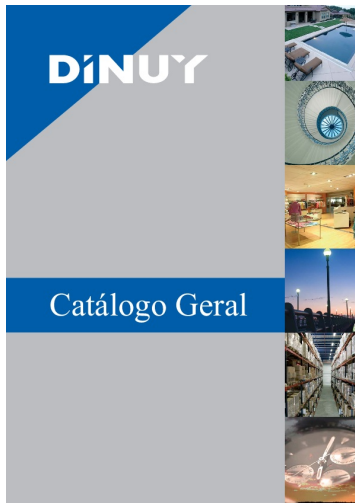

[\[pdf\]](#) User Manual Catalog

Catálogo General Portugues FH11 neme Português 4 MB Documentación y Catálogos Dinuy


Reguladores Knx Sensores de movimiento Catalogo dinuy documentacion |||

Catlogo Geral ndice CAMPAINHAS MUSICAIS 4 AUTOMTICOS DE ESCADA 13

REGULADORES DE INTENSIDADE ... uortan contator. Caractersticas tcnicas

REFERNCIA PT EMP EL4 PT EMP EL5 PT EMP EL6 PT GAR EL1 **PT SUP EL4** PT
EMP 004 PT EMP 005 PT EMP 006 PT GAR 001 PT SUP 004 Poder de corte Modelo
Tenso d...

lang:pt **score:20** filesize: 3.69 M page_count: 52 document date: 2011-05-04

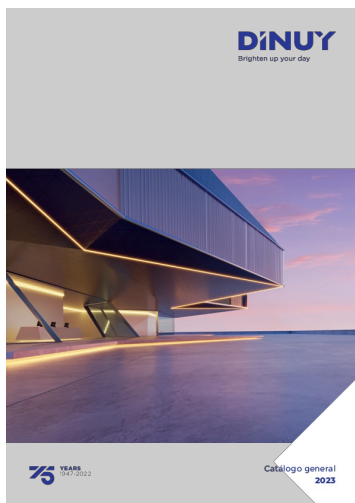


[\[pdf\]](#) Catalog

Descargas Soporte 57259dd808c33845e643934a8b1feb64 dinuy descargas fichero es 3 |||

YEARS 1947-2022 Catlogo general 2023 DINUY S.A., fundada en 1947, es una
empresa familiar dedica ... ivacin externa mediante pulsadores convencionales. LED
indicador, permanece iluminado constante. **PT SUP EL4**: superficie a 2 hilos PT SUP
004: superficie a 3 hilos con neutro. Ejemplos de apicacin...

lang:es **score:20** filesize: 11.74 M page_count: 138 document date: 2023-07-20

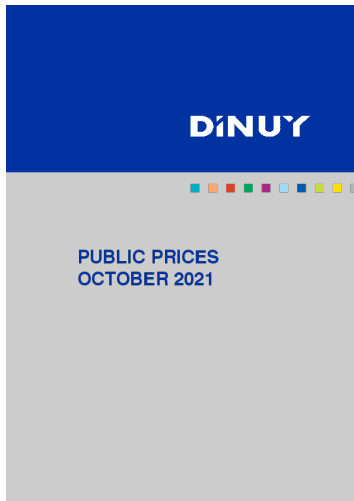


[\[pdf\]](#) Documentation Accessories Catalog Price List

PUBLIC PRICES OCTOBER 2021 PVP octubre EN dinuy 11 October Price List Documentation and Catalogues Dinuy Reguladores Knx Sensores de movimiento Dimmers CO KNX 001 RC EM 002 AM PU POT REFERENCE DESCRIPTION Wireless RF Control communication interface RE EL1 LE1 LE3 EL2 LE2 EL5 |||

PUBLIC PRICES OCTOBER 2021 INDEX DIMMERS Bluetooth dimmers and switches page 3 LED lamps page 3 LE ... ts Contactor PT GAR PR1 PT GAR 001 PT GAR EL1 REFERENCE MODEL PT EMP 004 PT EMP EL4 PT SUP 004 **PT SUP EL4** LOAD CAPACITY PT EMP 005 PT EMP EL5 PT GAR PR1 PT GAR 001 PT GAR EL1 PT EMP 004 PT EMP ...

lang:en **score:19** filesize: 2.02 M page_count: 21 document date: 2021-11-05

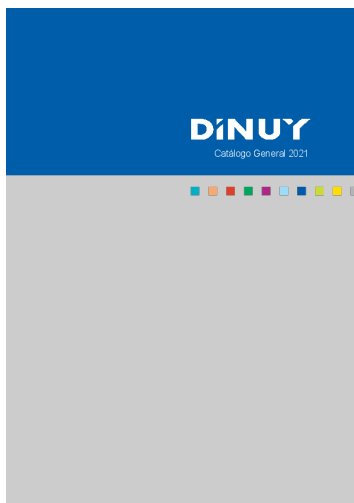


[\[pdf\]](#) Catalog

Catalogo DINUY 2019 A4 imac CATALOGO2019 dinuy 2021 10 |||

Catlogo General 2021 Catlogo General DINUY, S.A. es una empresa familiar fundada en 1950, inici ... consumo Extractores Temporizacin Rearmable Led luminoso Montaje PT EMP EL4 PT EMP EL5 PT EMP EL6 **PT SUP EL4** PT EMP 004 PT EMP 005 PT EMP 006 PT SUP 004 Empotrable FTVQFSmDJF Empotrable FTVQ...


lang:es **score:19** filesize: 8.17 M page_count: 120 document date: 2021-08-05

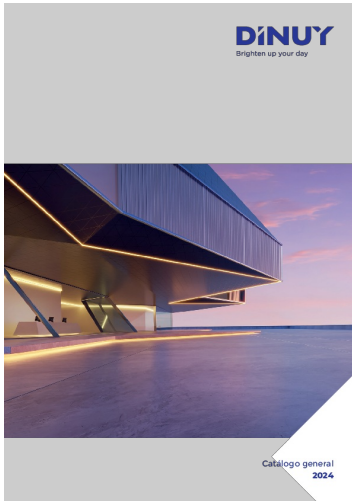

[Catálogo General DINUY 2024 - Soluciones Eléctricas y Automatización](#)

Descubra el Catálogo General 2024 de DINUY, líder en soluciones eléctricas para automatización de viviendas y edificios. Explore productos innovadores en control de iluminación, KNX, DALI, sensores, temporizadores y más, enfocados en eficiencia energética y diseño.

lang:es **score:19** filesize: 28.09 M page_count: 140 document date: 2024-05-06

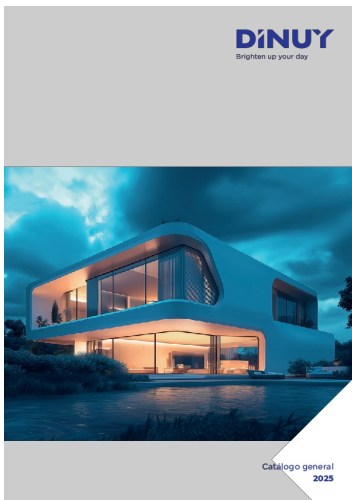

[\[pdf\] Catalog](#)

Descargas Soporte 3c05e0ab6dea5fe65a53e36d78e34ba5 dinuy descargas fichero es 3 |||

Catlogo general 2025 DINUY S.A., fundada en 1947, es una empresa familiar dedicada a soluciones e ... ivacin externa mediante pulsadores convencionales. LED indicador, permanece iluminado constante. **PT SUP EL4:** superficie a 2 hilos PT SUP 004: superficie a 3 hilos con neutro. Ejemplos de apicacin...

lang:es **score:19** filesize: 11.66 M page_count: 142 document date: 2025-06-06



[\[pdf\]](#) Accessories

a520aeca8ad87cdad872d78d11867 dinuy descargas fichero en 20 |||

Brighten up your day YEARS 1947-2022 Public Prices January 2024 Index 01 KNX devices Twisted-p ... ting Timed tactile pushbutton 3-wire PT SUP 004 Surface-mounting Timed tactile pushbutton 2-wire **PT SUP EL4** PT EMP 005 Surface-mounting Timed tactile pushbutton 3-wire Timed tactile pushbutton 2-w...
lang:en **score:19** filesize: 3.19 M page_count: 29 document date: 2024-09-16



[\[pdf\]](#) Accessories

Downloads Support 90b33199262bdf5ccd033bdbc3efa203 dinuy descargas fichero en 20 |||

Brighten up your day YEARS 1947-2022 Public Prices January 2024 Index 01 KNX devices Twisted-p ... ting Timed tactile pushbutton 3-wire PT SUP 004 Surface-mounting Timed tactile pushbutton 2-wire **PT SUP EL4** PT EMP 005 Surface-mounting Timed tactile pushbutton 3-wire Timed tactile pushbutton 2-w...
lang:en **score:18** filesize: 4.87 M page_count: 29 document date: 2024-06-26




[\[pdf\]](#)

documentación Nueva Tarifa PVP marzo 2022 Dinuy Reguladores Knx Sensores de movimiento DINUY Marzo dinuy 03 siguiente enlace Mostrando articulos por etiqueta precios Asociación Profesional Empresarios Instalaciones Eléctricas y Telecomunicaciones Madrid |||
YEARS 1947-2022 Tarifa PVP Marzo 2022 Indice 01 Dispositivos KNX Sistema Par Trenzado Sistema R ... l temporizado a 3 hilos empotrable PT SUP 004 Pulsador tctil temporizado a 2 hilos de superficie **PT SUP EL4** Pulsador tctil temporizado a 3 hilos de superficie PT EMP 005 Pulsador tctil temporiza...
lang:es **score:18** filesize: 6.74 M page_count: 32 document date: 2022-03-14




[\[pdf\]](#)

Descargas Soporte 361537c035b325880e197e90c434068c dinuy descargas fichero es 20 |||
Tarifa PVP Enero 2025 Indice 01 Dispositivos KNX Sistema Par Trenzado Sistema Radio-Frecuencia ... superficie 500W 400W 500W - - Ajuste temp. mx. hasta 12 min. Caja de superficie 68,03 10 **PT SUP EL4** Pulsador tctil temporizado a 3 hilos de superficie 3.000W 2.400W 3.000W 1.300W 400W Aju...
lang:es **score:18** filesize: 2.95 M page_count: 28 document date: 2025-06-05

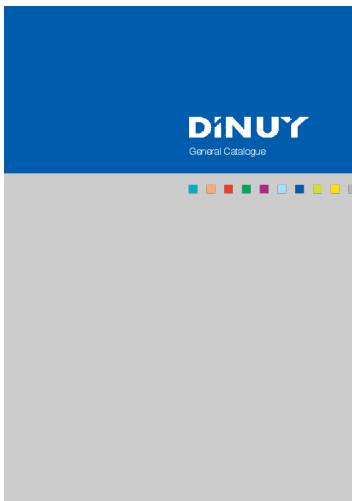


[\[pdf\]](#) Catalog

General Catalogue DINUY imac DOWNLOAD Za Arhitekta Daljinsko Upravljanje d o general catalogue
dinuy mail min daljinsko upravljanje hr |||
General Catalogue DPLO RZQHGFPSDQ IRXQGHGLQVWDUWLQJWRPDQX
IDFWXUHHOHFWULFDOHTXLSPHQW 2XUFRPPLWP ... RENCIE Model PT EMP
EL4 PT EMP EL5 PT EMP EL6 Flush mounting in standard box with security screws
PT SUP EL4 Surface mounting with incorporated box PT EMP 004 PT EMP 005 PT
EMP 006 Flush mounting i...
lang:i-klngon **score:17** filesize: 1.93 M page_count: 86 document date: 2018-06-08

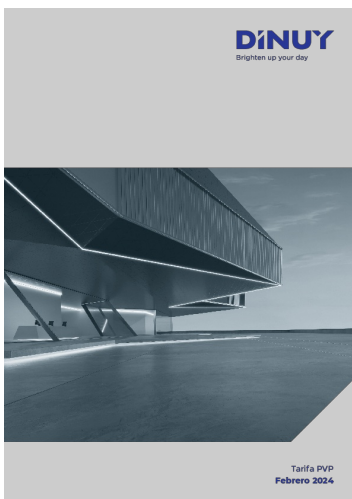

[\[pdf\]](#)

Descargas Soporte 0aa5f6df8f427bab145737b223ee22bd dinuy descargas fichero es 20 |||
Tarifa PVP Febrero 2024 Indice 01 Dispositivos KNX Sistema Par Trenzado Sistema Radio-Frecuencia ... mx. hasta 12 min. Admite uso de contactor 500W 400W 500W - - Ajuste temp. mx. hasta 12 min. **PT SUP EL4** Pulsador tctil temporizado a 3 hilos de superficie 3.000W 2.400W 3.000W 1.300W 400W Aju...
lang:es **score:17** filesize: 10.14 M page_count: 32 document date: 2024-06-03

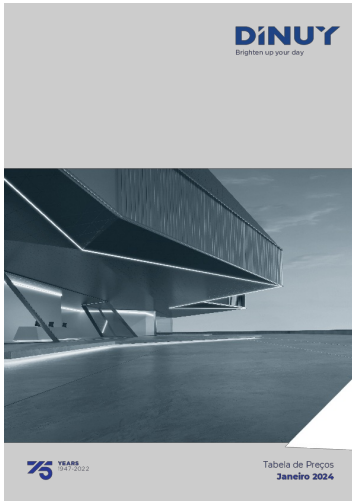


[\[pdf\]](#)

72df422a4f19fe2cb2e965c9279557bd dinuy descargas fichero en 42 |||

Brighten up your day YEARS 1947-2022 Tabela de Preços Janeiro 2024 Indice 01 Dispositivos KNX S ... I Boto tctil temporizado 3 fios encastrvel PT SUP 004 Boto tctil temporizado 2 fios de superficie **PT SUP EL4** Pulsador tctil temporizado 3 fios de superficie 500W 400W 500W - - Configurao de te...

lang:pt **score:17** filesize: 3.91 M page_count: 29 document date: 2024-09-16

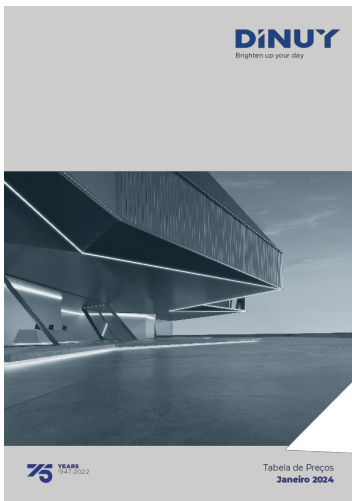

[\[pdf\]](#)

Downloads Support d0f6ae574fb12c6d903fe8eaea271971 dinuy descargas fichero en 42 |||

Brighten up your day YEARS 1947-2022 Tabela de Preços Janeiro 2024 Indice 01 Dispositivos KNX S ... I Boto tctil temporizado 3 fios encastrvel PT SUP 004 Boto tctil temporizado 2 fios de superficie **PT SUP EL4** Pulsador tctil temporizado 3 fios de superficie 500W 400W 500W - - Configurao de te...

lang:pt **score:16** filesize: 3.89 M page_count: 29 document date: 2024-06-26



[\[pdf\]](#)

Downloads Support 9de399efa416c09b873e3ddf7c284580 dinuy descargas fichero en 43 |||

YEARS 1947-2022 Tarif public Janvier 2024 1/ DiNU,. 1947-2022 Index 01 Apareils KNX Systme de ... acteur 500W 400W 500W - - Rglage de la temps max. jusqu 12 min Boite de surface 66,18 10 **PT SUP EL4** Bouton poussoir tactile temporis 3 fils de surface 3.000W 2.400W 3.000W 1.300W 400W Rgl...

lang:fr **score:16** filesize: 3.25 M page_count: 29 document date: 2024-06-26




[\[pdf\]](#)

disponible en la web de compañía Tarifa PVP Enero 2023 DINUY publica su nueva tarifa entrada vigor el 1 enero APIEM Está 30 janv — Tipos carga R Incandescencia y Halógenas 230V L Transformadores ferromagnéticos Electrónicos regulables a principio fase TARIFA dinuy 01 |||

YEARS 1947-2022 Tarifa PVP Enero 2023 Indice 01 Dispositivos KNX Sistema Par Trenzado Sistema R ... temp. mx. hasta 12 min. Admite uso de contactor 400W 500W - - Ajuste temp. mx. hasta 12 min. **PT SUP EL4** PT EMP 005 Pulsador tctil temporizado a 3 hilos de superficie 3.000W Pulsador tctil te...

lang:es **score:16** filesize: 3.28 M page_count: 32 document date: 2023-01-04

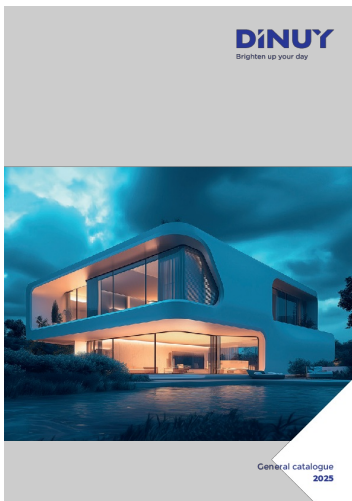

[\[pdf\]](#) Catalog

Downloads Support19ed958fc6a8bc38338f5e510e058c59dinuy descargas fichero en 3 19ed958fc6a8bc38338f5e510e058c59 |||

General catalogue 2025 DINUY, S.A., founded in 1947, is a family business dedicated to electrical ... of external activation via conventional buttons. LED indicator, which is constantly illuminated. **PT SUP EL4**: two-wire surface. PT SUP 004: three-wire surface with neutral. Examples of use: Corrid...

lang:en **score:13** filesize: 20.32 M page_count: 116 document date: 2025-02-06




[\[pdf\]](#) Accessories

Downloads Supportf6b44f6368ac30066fdcc6929519af96dinuy descargas fichero en 20 f6b44f6368ac30066fdcc6929519af96 |||

Public Prices January 2025 Index 01 KNX devices Twisted pair system Radio-frequency system P. 4 ... 500W 400W 500W Timer setting max. up to 12min ----- Surface Box 68,03 10 mounting **PT SUP EL4** Surface-mounting 3-wire Tactile Push-button 3.000W 2.400W 3.000W Timer setting max. up ...

lang:en **score:13** filesize: 1.85 M page_count: 27 document date: 2025-01-24

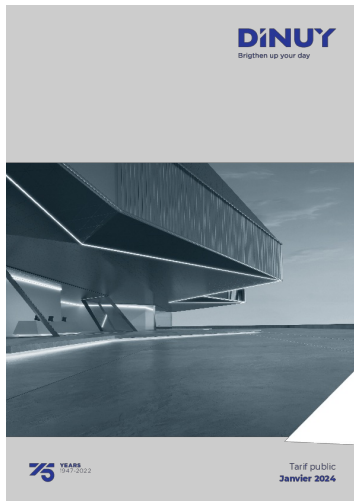

[\[pdf\]](#)

Downloads Support6828a1f1c15278cefed08ee069885cf3dinuy descargas fichero en 43
6828a1f1c15278cefed08ee069885cf3 |||

YEARS 1947-2022 Tarif public Janvier 2024 1/ DiNU,. 1947-2022 Index 01 Apareils
KNX Systme de ... acteur 500W 400W 500W - - Rglage de la temps max. jusqu 12
min Boite de surface 66,18 10 **PT SUP EL4** Bouton poussoir tactile temporis 3 fils de
surface 3.000W 2.400W 3.000W 1.300W 400W Rgl...

lang:fr **score:9** filesize: 3.67 M page_count: 29 document date: 2024-09-16