

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SereneLife](#) /

› [SereneLife SLARP800BK 2-in-1 Dehumidifier User Manual](#)

## SereneLife SLARP800BK

# SereneLife SLARP800BK 2-in-1 Dehumidifier User Manual

Model: SLARP800BK

## 1. IMPORTANT SAFETY INSTRUCTIONS

Please read all instructions carefully before operating the dehumidifier and retain this manual for future reference. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- Always place the dehumidifier on a firm, level surface.
- Do not operate the unit near water or in excessively wet environments.
- Ensure the power cord is not damaged and is properly plugged into a grounded outlet.
- Do not block the air inlet or outlet vents. Maintain at least 8 inches (20 cm) clearance around the unit.
- Unplug the unit before cleaning or performing any maintenance.
- Do not insert objects into the unit's openings.
- Keep out of reach of children and pets.
- This appliance is for indoor residential use only.

## 2. PRODUCT OVERVIEW

The SereneLife SLARP800BK is a 2-in-1 dehumidifier designed to reduce humidity in various indoor spaces. It features a main thermoelectric dehumidifier unit with an 85 oz (91 fl oz) water tank and a detachable desiccant silica gel module for smaller, enclosed areas.

### Package Contents:

- Drying Base (Main Dehumidifier Unit)
- Removable Dehumidifying Cylinder (Silica Gel Module)
- Power Adapter

# what's in the box ?



Figure 2.1: Components included in the package. The main unit measures approximately 9"D x 6"W x 13"H.

## Key Features:

- **Quiet Operation:** Operates at approximately 50dB, suitable for bedrooms and offices.
- **2-in-1 Design:** Main unit for general room dehumidification and a removable silica gel cylinder for small, enclosed spaces.
- **Smart Humidity Control:** Automatically detects moisture levels and maintains ideal indoor humidity (45–55%).
- **Automatic Shut-off:** Unit automatically turns off when the water tank is full.
- **Defrost Function:** Prevents ice buildup on internal components.
- **Timer Settings:** Options for 6, 12, or 24-hour operation.
- **Sleep Mode:** Reduces fan speed for quieter overnight operation.
- **Two Fan Speeds:** Adjustable fan intensity.
- **Reusable Silica Gel Module:** Changes color to indicate saturation and can be recharged on the main unit.

## 3. SETUP

Follow these steps to set up your dehumidifier for first use.

1. **Unpack the Unit:** Carefully remove all components from the packaging. Inspect for any damage.
2. **Placement of Main Unit:** Place the main dehumidifier unit on a stable, level surface in the desired room. Ensure there is at least 8 inches (20 cm) of clear space around all sides for proper airflow. Avoid placing it directly against walls or furniture.
3. **Power Connection:** Connect the power adapter to the DC input port on the back of the dehumidifier. Plug the other end of the adapter into a standard electrical outlet (100-240V AC, 50/60Hz).
4. **Initial Silica Gel Module Check:** The silica gel module is ready for use when the beads are orange. If they are dark green, the module needs to be recharged. Refer to the Maintenance section for recharging instructions.



Figure 3.1: Proper placement of the dehumidifier in a room for optimal performance.

## 4. OPERATING INSTRUCTIONS

This section details how to operate your SereneLife dehumidifier.

### Control Panel:

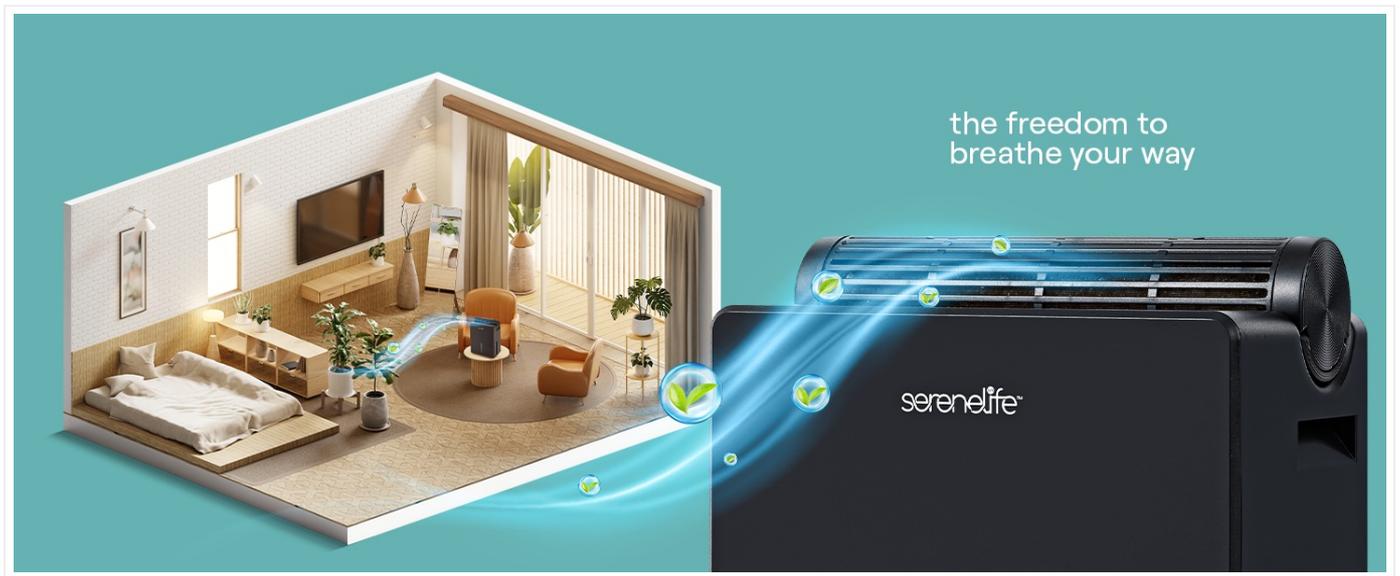


Figure 4.1: Dehumidifier control panel layout.

- **Power Button:** Press to turn the unit ON or OFF.
- **Modes Button:** Cycles through available operating modes (e.g., Standard, Sleep).
- **Timer Button:** Sets the operating duration (6, 12, or 24 hours).
- **Dry Button:** Activates the drying cycle for the silica gel module.
- **Lights Button:** Controls the ambient light feature.

### Main Unit Operation:

1. **Power On:** Press the Power button. The unit will start operating in its default mode.
2. **Select Mode:** Press the Modes button to cycle through available modes. The unit features smart humidity detection to maintain 45-55% relative humidity.
3. **Set Timer (Optional):** Press the Timer button repeatedly to select a 6, 12, or 24-hour operating period. The unit will automatically shut off after the selected time.
4. **Sleep Mode:** Activate Sleep Mode for reduced noise during nighttime use. This mode typically lowers the fan speed.
5. **Water Tank Full Indicator:** When the water tank is full, the unit will automatically shut off, and an indicator light will illuminate. Empty the tank as described in the Maintenance section.



Figure 4.2: The dehumidifier operating in quiet sleep mode.

### Detachable Silica Gel Module Operation:

The removable silica gel module can be used independently in small, enclosed spaces where power is not available.

1. **Deployment:** Place the silica gel module in areas like closets, drawers, or small cabinets.
2. **Moisture Absorption:** The silica gel beads will absorb moisture from the air. The beads will change color from orange (dry) to dark green (saturated).
3. **Recharging:** Once the beads turn dark green, the module needs to be recharged. Refer to the Maintenance section for recharging instructions.

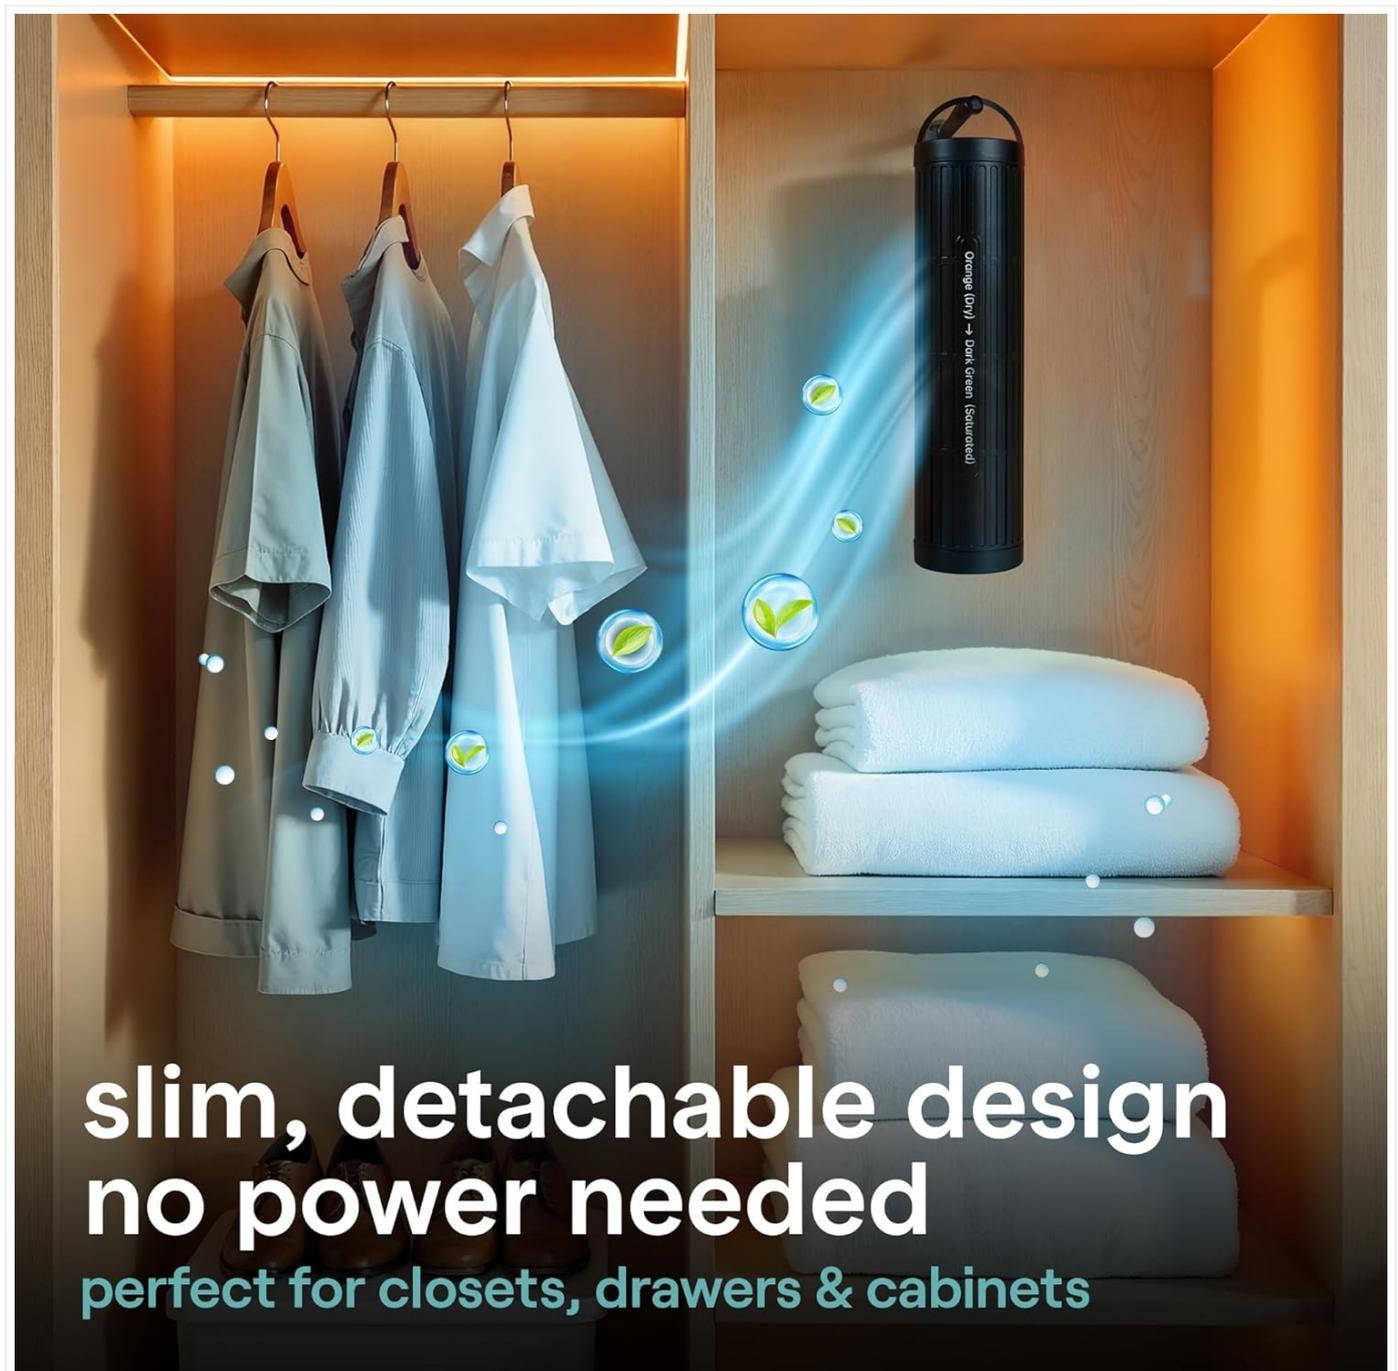


Figure 4.3: The detachable silica gel module in use within a closet.

## 5. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your dehumidifier.

### Emptying the Water Tank:

1. When the water tank is full, the unit will stop operating, and the 'Full' indicator light will turn on.
2. Gently pull out the water tank from the front of the unit.
3. Carefully carry the tank to a sink and pour out the collected water.
4. Rinse the tank with clean water and wipe it dry.
5. Slide the empty water tank back into the dehumidifier until it clicks into place. The unit will resume operation.

### Cleaning the Unit:

- **Exterior:** Wipe the exterior of the unit with a soft, damp cloth. Do not use abrasive cleaners or solvents.

- **Air Vents:** Use a soft brush or vacuum cleaner attachment to remove dust from the air inlet and outlet vents.
- **Frequency:** Clean the unit regularly, especially if operating in dusty environments.

### Recharging the Silica Gel Module:

When the silica gel beads turn dark green, the module is saturated and needs to be recharged.

1. Remove the silica gel module from its location.
2. Insert the module into the designated slot on top of the main dehumidifier unit.
3. Press the 'Dry' button on the control panel to initiate the drying cycle. The main unit will heat the silica gel, causing it to release absorbed moisture.
4. The drying process typically takes 2-3 hours. The beads will return to an orange color when fully dry and ready for reuse.
5. Once recharged, remove the module and use it again as needed.



Figure 5.1: Visual guide for recharging the reusable silica gel module.

## 6. TROUBLESHOOTING

If you encounter issues with your dehumidifier, refer to the following common problems and solutions.

Problem	Possible Cause	Solution
Unit does not turn on.	No power supply.	Ensure the power adapter is securely plugged into the unit and a working electrical outlet. Check the circuit breaker.
Unit is running but not collecting water.	Room humidity is too low.	The unit may not collect water if the humidity level is already below the target range (e.g., 45-55%).
	Ambient temperature is too low.	Thermoelectric dehumidifiers are less effective in very cold environments. Ensure the room temperature is above 41°F (5°C).
	Air vents are blocked.	Ensure there is sufficient clearance around the unit and clean any dust from the vents.
Unit stops operating unexpectedly.	Water tank is full.	Empty the water tank and reinsert it properly.
	Timer function is active.	Check if a timer was set. The unit will turn off after the set duration.
Silica gel module not drying.	Module not properly inserted or 'Dry' button not pressed.	Ensure the module is correctly seated in the main unit and the 'Dry' button has been activated.

If the problem persists after trying these solutions, please contact customer support.

## 7. SPECIFICATIONS

Feature	Specification
Model Name	SLARP800BK
Brand	SereneLife
Operation Mode	Automatic
Floor Area Coverage	Up to 216 Square Feet
Water Tank Volume	85 oz (91 Fluid Ounces)
Product Dimensions (D x W x H)	9" x 6" x 13"
Item Weight	6.96 pounds
Number of Speeds	2
Special Feature	Detachable Silica Gel Module
Included Components	Adapter, Drying Base (Main Unit), Removable Dehumidifying Cylinder
UPC	842893176277

## 8. WARRANTY AND SUPPORT

This SereneLife product is covered by a manufacturer's warranty. For specific warranty details, including duration and coverage, please refer to the warranty card included with your purchase or visit the official SereneLife website.

For technical support, troubleshooting assistance, or to inquire about replacement parts, please contact SereneLife customer service.

Contact information can typically be found on the product packaging or the official brand website.

