

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [UrbanX](#) /

> [UrbanX UXM030 Wireless Bluetooth Keyboard and Mouse Combo User Manual](#)

UrbanX UXM030

UrbanX UXM030 Wireless Bluetooth Keyboard and Mouse Combo User Manual

Model: UXM030

1. INTRODUCTION

Thank you for choosing the UrbanX Wireless Bluetooth Keyboard and Mouse Combo. This manual provides detailed instructions for setting up, operating, and maintaining your new peripheral devices. Please read this manual thoroughly before use to ensure optimal performance and longevity of your product.

2. PACKAGE CONTENTS

Please check the package contents to ensure all items are present:

- UrbanX Bluetooth Wireless Keyboard
- UrbanX Wireless Mouse
- Shared USB Receiver (stored in the mouse battery compartment)
- USB Charging Cable
- User Guide

3. PRODUCT OVERVIEW

The UrbanX Keyboard and Mouse Combo is designed for versatility and comfort, featuring dual-mode connectivity (Bluetooth and 2.4GHz wireless) and long-lasting rechargeable batteries.

3.1 Keyboard Features

- **Full-Size Layout:** Includes a numeric keypad and arrow keys for comprehensive functionality.
- **Low-Profile Keys:** Designed for a quiet and comfortable typing experience.
- **Hotkeys:** Dedicated keys for Windows functions such as volume control, playback, and copy/paste.
- **Dual-Mode Connectivity:** Supports Bluetooth (BT1, BT2) and 2.4GHz wireless connection.
- **Multi-Device Support:** Easily switch between up to three connected devices.

VERSATILE DUAL MODE KEYBOARD

Easy to setup and switch
between 3 devices at a time

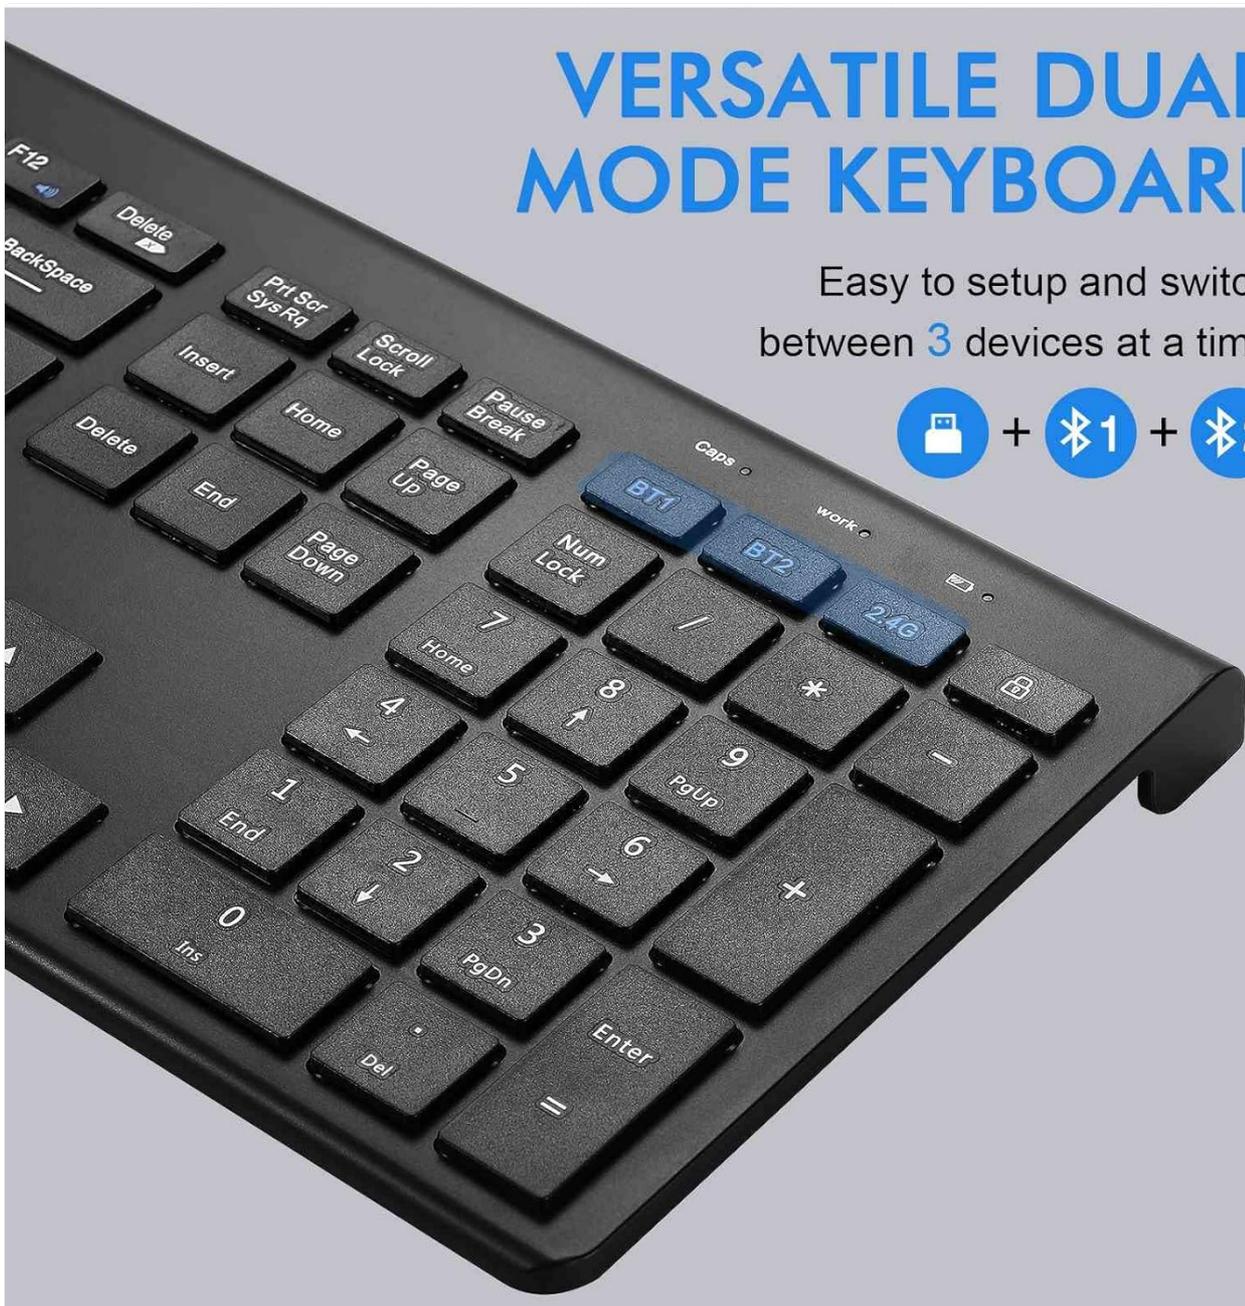


Image: The UrbanX keyboard highlighting the BT1, BT2, and 2.4G connection buttons for multi-device pairing.



Whisper quiet keys
and noiseless mouse

Low profile and scissor switch design,
these keys guarantee quiet and
comfortable typing.

Image: The UrbanX keyboard and mouse, illustrating the low-profile, scissor-switch keys designed for quiet and comfortable typing.

3.2 Mouse Features

- **Ergonomic Design:** Shaped to reduce hand strain during extended use.
- **DPI Switch:** Allows adjustment of cursor speed for precision or rapid movement.
- **Dual-Mode Connectivity:** Supports Bluetooth (BT1, BT2) and 2.4GHz wireless connection.
- **USB Receiver Storage:** The nano USB receiver is conveniently stored within the mouse.

BLUETOOTH +2.4GHz DUAL-MODE MOUSE

Versatile for three devices simultaneously,
you can switch between 3 devices



Image: The underside of the UrbanX mouse, indicating its Bluetooth and 2.4GHz dual-mode wireless capabilities.

4. SETUP INSTRUCTIONS

The UrbanX combo offers two connection methods: 2.4GHz wireless via USB receiver or Bluetooth.

4.1 2.4GHz Wireless Connection (USB Receiver)

1. Locate the nano USB receiver stored in the battery compartment of the mouse.
2. Plug the USB receiver into an available USB port on your computer or device.
3. Turn on the keyboard and mouse using their respective power switches.
4. The devices should connect automatically. No additional drivers are required.

4.2 Bluetooth Connection

The keyboard and mouse can connect to up to two Bluetooth devices each (BT1 and BT2 channels).

4.2.1 Keyboard Bluetooth Pairing

1. Turn on the keyboard.
2. Press and hold the **BT1** or **BT2** button for 3-5 seconds until the indicator light flashes, indicating pairing mode.

3. On your device (e.g., laptop, tablet, smartphone), go to Bluetooth settings and search for new devices.
4. Select "UrbanX Keyboard" from the list of available devices.
5. Follow any on-screen prompts to complete the pairing.
6. Repeat for a second Bluetooth device using the other BT channel (BT2 if BT1 was used first).

4.2.2 Mouse Bluetooth Pairing

1. Turn on the mouse.
2. Press and hold the **BT1** or **BT2** button (usually on the bottom of the mouse) for 3-5 seconds until the indicator light flashes.
3. On your device, go to Bluetooth settings and search for new devices.
4. Select "UrbanX Mouse" from the list.
5. Follow any on-screen prompts to complete the pairing.
6. Repeat for a second Bluetooth device using the other BT channel.



Image: An illustration showing the UrbanX keyboard and mouse connected to a tablet (Channel 1), a laptop (Channel 2), and a smartphone (Channel 3), demonstrating multi-device connectivity.

5. OPERATING INSTRUCTIONS

5.1 Switching Between Devices

To switch between connected devices:

- **Keyboard:** Press the **BT1**, **BT2**, or **2.4G** button briefly to switch to the corresponding connected device.
- **Mouse:** Press the **BT1**, **BT2**, or **2.4G** button (usually on the bottom) briefly to switch to the corresponding connected device.

5.2 Keyboard Hotkeys

The keyboard features dedicated hotkeys for quick access to common functions. These are typically located on the F-keys row and activated by pressing the **Fn** key in combination with the desired F-key, or directly depending on the operating system.

Key Combination	Function
Fn + F1	Media Player
Fn + F2	Volume Down
Fn + F3	Volume Up
Fn + F4	Mute
Fn + F5	Previous Track
Fn + F6	Next Track
Fn + F7	Play/Pause
Fn + F8	Stop
Fn + F9	Home Page
Fn + F10	Mail
Fn + F11	My Computer
Fn + F12	Calculator
Fn + Esc	Lock Screen

Note: Some hotkey functions may vary depending on your operating system (Windows, macOS, Android, iPadOS).

5.3 Mouse DPI Adjustment

The mouse features a DPI switch button, usually located near the scroll wheel. Press this button to cycle through different cursor speeds (DPI settings). This allows you to adjust the sensitivity of the mouse to your preference.

6. CHARGING INSTRUCTIONS

Both the keyboard and mouse are equipped with rechargeable Li-polymer batteries.

1. Connect the provided USB charging cable to the charging port on the keyboard or mouse.
2. Plug the other end of the USB cable into a USB power source (e.g., computer USB port, USB wall adapter).
3. An indicator light will typically show the charging status. It will turn off or change color when fully charged.

Battery Life:

- **Keyboard:** Up to 6 months on a single charge (based on 2 hours of non-stop use per day).
- **Mouse:** Up to 4 months on a single charge (based on 2 hours of non-stop use per day).
- **Charging Time:** Approximately 2 hours for a full charge.
- **Standby Time:** Exceeds 2160 hours (90 days).

LONG-LASTING RECHARGEABLE BATTERY

Standby time exceeds 2160 hours.
Intelligent power saving it will
automatically enter power saving
mode when not in use.



2 Hours
Charging Time



90 Days
Standby Time




Image: The UrbanX keyboard and mouse shown connected via USB cables for charging, with indicators for charging time and standby time.

7. MAINTENANCE

To ensure the longevity and optimal performance of your UrbanX Keyboard and Mouse Combo:

- **Cleaning:** Use a soft, dry cloth to wipe the surfaces. For stubborn dirt, a slightly damp cloth can be used, ensuring no moisture enters the device.
- **Storage:** Store the devices in a cool, dry place away from direct sunlight and extreme temperatures.
- **Avoid Liquids:** Do not expose the devices to water or other liquids.
- **Handle with Care:** Avoid dropping or subjecting the devices to strong impacts.

8. TROUBLESHOOTING

If you encounter issues with your UrbanX Keyboard and Mouse Combo, please refer to the following common solutions:

Problem	Possible Solution
Devices not connecting via 2.4GHz	<ul style="list-style-type: none">◦ Ensure the USB receiver is securely plugged into a working USB port.◦ Check if the keyboard and mouse are turned on.◦ Try plugging the receiver into a different USB port.◦ Ensure the devices are within the 33-foot (10-meter) operating range.◦ Recharge the devices to ensure sufficient battery.
Devices not connecting via Bluetooth	<ul style="list-style-type: none">◦ Ensure Bluetooth is enabled on your device.◦ Put the keyboard/mouse into pairing mode (press and hold BT1/BT2 until indicator flashes).◦ Remove previous pairings of "UrbanX Keyboard" or "UrbanX Mouse" from your device's Bluetooth list and try pairing again.◦ Ensure the devices are within the 33-foot (10-meter) operating range.◦ Recharge the devices to ensure sufficient battery.
Keyboard/Mouse not responding	<ul style="list-style-type: none">◦ Check battery levels and recharge if necessary.◦ Ensure the devices are turned on.◦ Verify the correct connection mode (2.4G, BT1, or BT2) is selected.◦ Restart your computer/device.
Cursor movement is erratic or slow	<ul style="list-style-type: none">◦ Clean the mouse sensor.◦ Adjust the DPI setting using the DPI switch on the mouse.◦ Ensure the mouse is used on a suitable surface.

9. SPECIFICATIONS

Feature	Detail
Model Number	UXM030
Connectivity Technology	Bluetooth, 2.4GHz Wireless
Compatible Devices	HP ENVY 17t CG Laptop, Mobile Phone, Tablet, Laptop, Smartphone, PC, Mac (Windows, macOS, iPadOS, Android, Chrome OS)
Keyboard Description	US Layout, Full-Size, Low-Profile, Scissor-Switch
Special Features	Ergonomic, Rechargeable, Multi-Device Switching
Power Source	Battery Powered (Built-in Li-polymer)
Keyboard Battery Life	Up to 6 months (2 hours/day usage)

Feature	Detail
Mouse Battery Life	Up to 4 months (2 hours/day usage)
Charging Time	Approx. 2 hours
Operating Range	Up to 33 feet (10 meters)
Product Dimensions (Keyboard)	17.1 x 5.1 x 0.7 inches (approximate)
Product Dimensions (Mouse)	4.5 x 2.2 x 1 inches (approximate)
Item Weight	1.54 ounces (Mouse only, approximate)

ULTRA THIN AND SPACE SAVING KEYBOARD



Image: Detailed dimensions of the UrbanX keyboard and mouse, showing their ultra-thin and space-saving design.

10. WARRANTY AND SUPPORT

The UrbanX Keyboard and Mouse Combo comes with a **1-year warranty** from the date of purchase. For technical support, warranty claims, or any questions regarding your product, please contact UrbanX customer support. Refer to the contact information provided on the product packaging or the UrbanX official website.