KENES LJ-9055A-4

KENES LJ-9055A-4 Pull Down Bathroom Faucet Instruction Manual

Model: LJ-9055A-4

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your KENES LJ-9055A-4 Pull Down Bathroom Faucet. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Figure 1: KENES LJ-9055A-4 Brushed Gold Pull Down Bathroom Faucet.

Product Features

- **Efficient Gargle Function:** Features an upper water jet with a consistent height of 5-12 cm, designed to prevent splashing and provide an ergonomic gargling experience.
- **Pull Down Sprayer:** The faucet head includes a three-function sprayer. Rotate the bottom to switch between a soft bubble stream and a strong spray. Slide the top button for the upper water spray gargle function.
- **Reliable Valve:** Equipped with a valve tested for over 500,000 uses, ensuring high performance, minimal drips, and smooth handle operation.
- **Corrosion-Resistant Finish:** The brushed gold finish is engineered for durability and tested for corrosion resistance, exceeding industry standards.
- **Easy DIY Installation:** Designed with a 2-head quick connection for straightforward installation, typically within 10 minutes, without requiring a plumber.
- **Single Hole Installation:** Compatible with single-hole installations, including a 6-inch deck plate and pop-up drain.



Figure 2: Illustration of the faucet's three spray functions: upper water spray, micro-bubble water, and powerful spray.



Figure 3: The faucet's mouthwash mode provides a consistent water jet for gargling.

Package Contents

Verify that all components are present before beginning installation. If any parts are missing or damaged, please contact customer support.

- KENES Pull Down Bathroom Faucet (Brushed Gold)
- 6-inch Deck Plate (Optional for 3-hole sinks)
- Pop Up Drain Assembly
- Hot and Cold Water Supply Lines (2 included)
- Installation Hardware (Mounting nut, washers, etc.)



Figure 4: Included components and dimensions for installation.

Safety Information

- Always turn off the main water supply before installing or performing any maintenance on the faucet.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- Ensure all connections are secure to prevent leaks. Do not overtighten.
- If you are unsure about any part of the installation process, consult a qualified plumber.

Installation (Setup)

The KENES LJ-9055A-4 faucet is designed for easy DIY installation. Follow these steps:

1. **Prepare the Sink:** Ensure the sink hole is clean and free of debris. For single-hole installations, no deck plate is needed. For 3-hole sinks, use the included 6-inch deck plate.

2. **Mount the Faucet:** Insert the faucet into the sink hole. From underneath the sink, secure it with the provided mounting hardware (washer and nut).
3. **Connect Water Supply Lines:** Attach the hot and cold water supply lines to the corresponding connections on the faucet and your water supply valves. Hand-tighten first, then use a wrench for a quarter turn.
4. **Install Pop-Up Drain:** Follow the instructions provided with the pop-up drain assembly to install it into the sink drain opening. Ensure a watertight seal.
5. **Test for Leaks:** Once all connections are made, slowly turn on the main water supply and check for any leaks. Tighten connections as necessary.

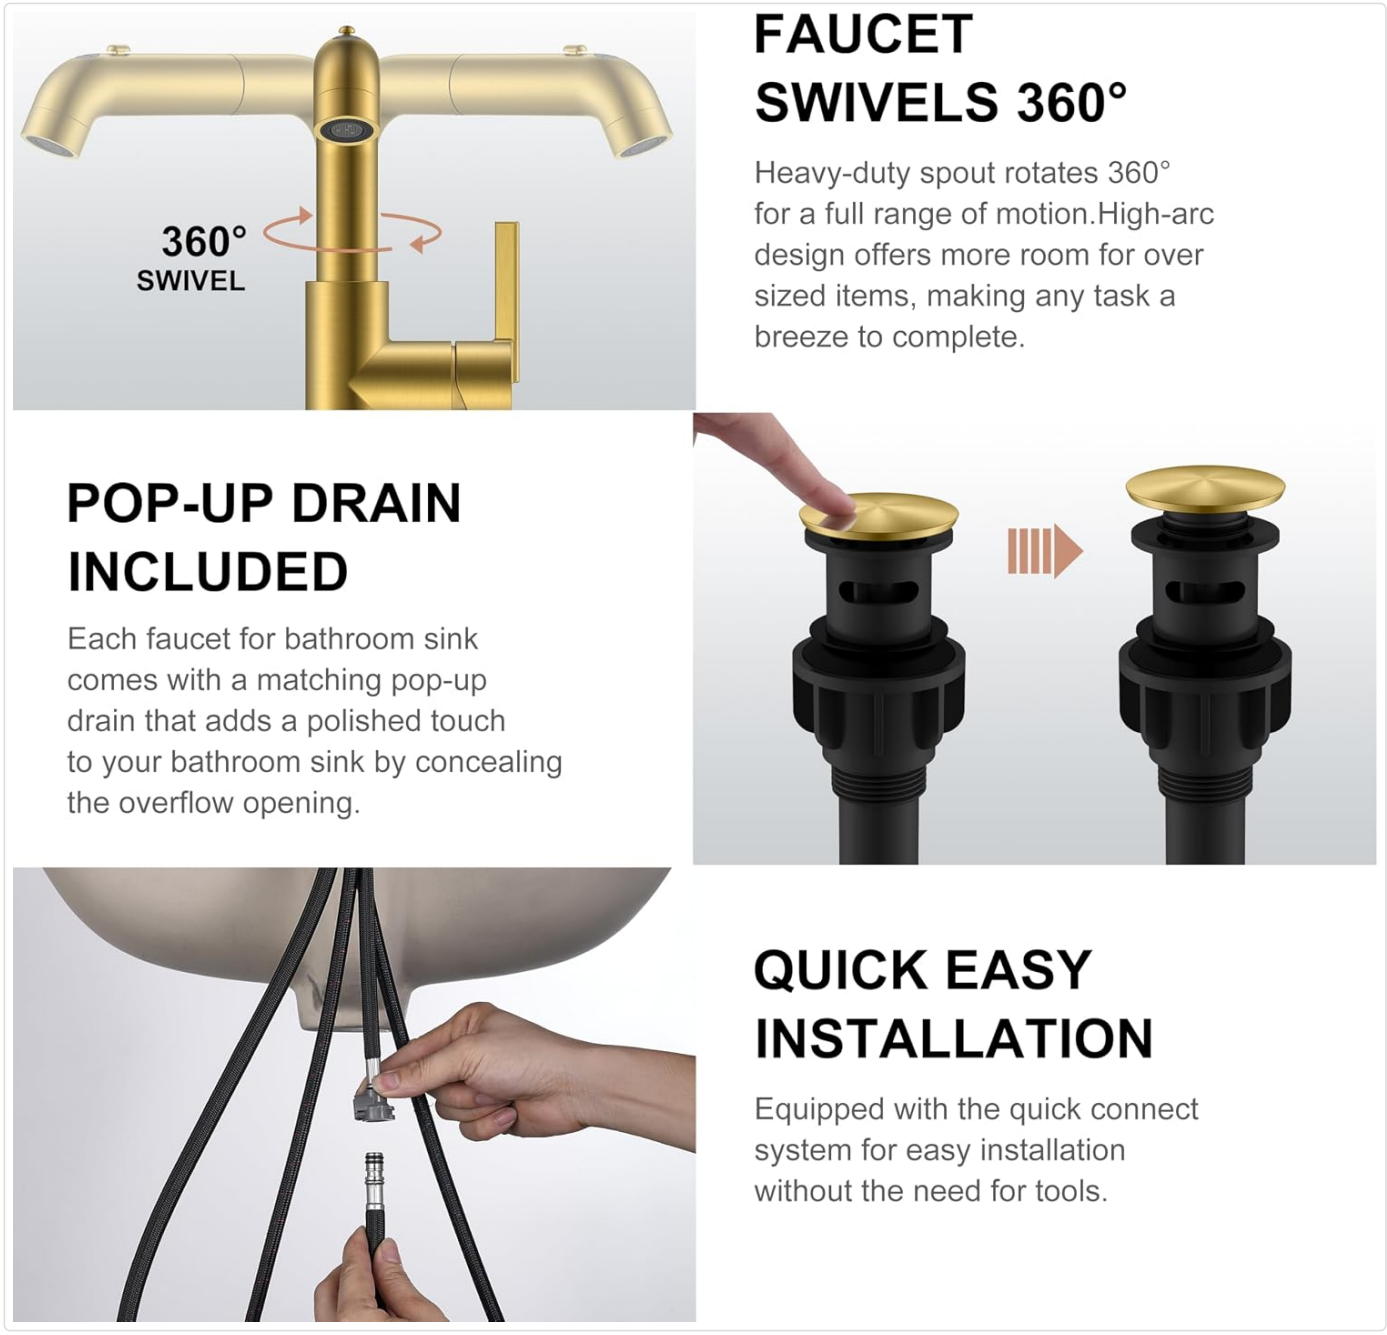


Figure 5: The quick connect system simplifies faucet installation.

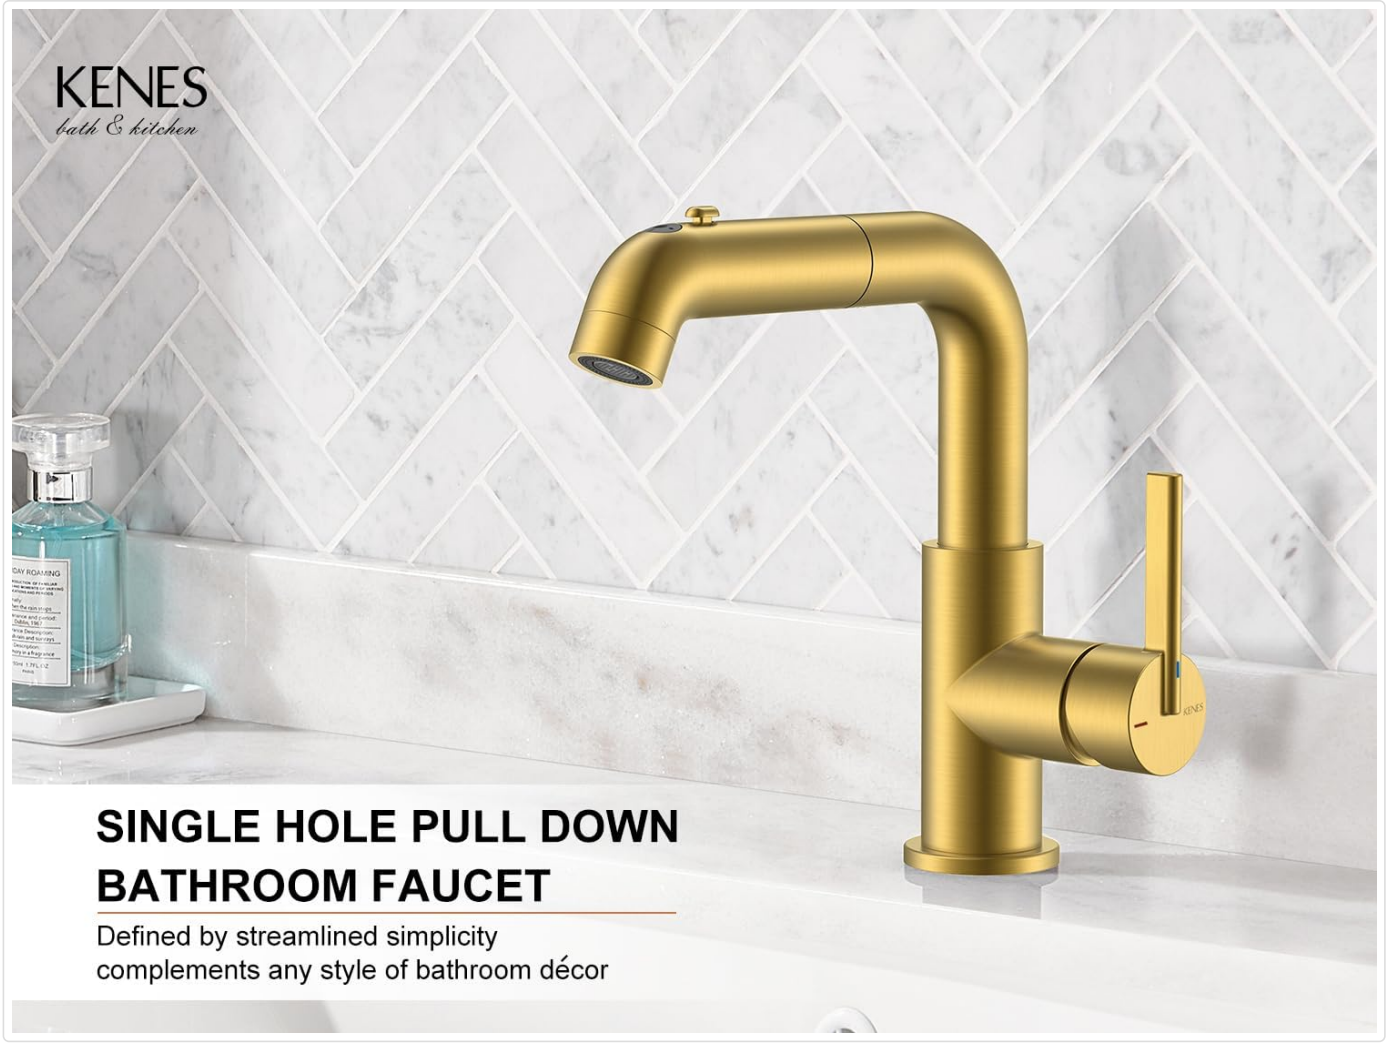


Figure 6: The pull-down sprayer offers extended reach for various tasks.

Operation

Water Flow and Temperature Control

The single lever handle controls both water flow and temperature. Move the handle forward for cold water and backward for hot water. The handle operates with a 90° forward rotation, allowing installation in tighter spaces without backsplash clearance issues.

Sprayer Functions

The pull-down sprayer head offers three distinct functions:

- **Soft Bubble Stream:** Rotate the bottom of the sprayer head to activate a gentle, aerated stream.
- **Strong Spray:** Rotate the bottom of the sprayer head to switch to a powerful spray for efficient cleaning.
- **Upper Water Spray (Gargle Function):** Gently slide the top button on the sprayer head to activate the upward water jet, ideal for gargling or quick rinsing without splashing.



Figure 7: Versatile uses of the pull-down sprayer, including gargling, face washing, hair washing, and sink cleaning.

360° Swivel Spout

The heavy-duty spout rotates 360 degrees, providing a full range of motion for increased flexibility and convenience in your bathroom sink.



Figure 8: The faucet's 360-degree swivel and 20-inch pull-out hose enhance maneuverability.

Micro-Bubble Water Technology

The micro-bubble water mode generates oxygen-rich bubbles (1-100µm diameter) that enhance cleaning effectiveness and provide a skin-moisturizing effect. This mode improves lipstick cleaning by 20%, foundation liquid cleaning by 41%, and skin moisturizing effect by 25%.



Figure 9: Benefits of micro-bubble water for enhanced cleaning and skin hydration.

Maintenance

Cleaning the Faucet

To maintain the brushed gold finish, clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish.

Cleaning the Pop-Up Drain

The included pop-up drain can be unscrewed from above the deck for easy cleaning of accumulated debris. Regularly remove and clean the drain to ensure proper water flow and hygiene.

Your browser does not support the video tag.

Video 1: This video demonstrates the features and ease of use of the KENES Pull Down Bathroom Faucet, including the pull-down sprayer, gargle function, and easy-to-clean pop-up drain.

Troubleshooting

Problem	Possible Cause	Solution
Low Water Flow	Aerator clogged; supply lines kinked; water supply partially closed.	Clean or replace aerator; check and straighten supply lines; ensure water supply valves are fully open.
Leaks from Faucet Base	Loose mounting nut; worn O-rings.	Tighten mounting nut under the sink; contact customer support for replacement O-rings if necessary.
Sprayer Not Retracting	Weight on hose obstructed; hose kinked.	Ensure the weight on the sprayer hose is free to move; check for kinks in the hose under the sink.
Water Temperature Issues	Hot/cold supply lines reversed; water heater issues.	Verify correct hot/cold line connections; check water heater settings.

Specifications

- **Brand:** KENES
- **Model Name:** Pull Down Bathroom Sink Faucet
- **Model Number:** LJ-9055A-4
- **Color:** Brushed Gold
- **Material:** Stainless Steel
- **Mounting Type:** Deck Mount
- **Hole Count:** 1 (compatible with 3-hole sinks using included deck plate)
- **Number of Handles:** 1 (Lever)
- **Spout Design:** Pull Down, 360° Swivel
- **Spout Height:** 6.5 Inches
- **Spout Reach:** 6.34 Inches
- **Flow Rate:** 1.2 Gallons Per Minute
- **Special Features:** 360 Swivel, Lead Free, Pull Down Sprayer, Three Function Sprayer (Soft Bubble Stream, Strong Spray, Upper Water Spray/Gargle)
- **Included Components:** Faucet, Deck Plate, Pop Up Drain, Installation Hardware, Supply Lines
- **UPC:** 734914732350

Warranty and Support

For warranty information or technical support, please contact KENES customer service. Keep your purchase receipt as proof of purchase.

© 2026 KENES. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question