

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [VTech](#) /
- › [VTech CS1550 DECT Cordless Phone with Answering Machine User Manual](#)

VTech CS1550

VTech CS1550 DECT Cordless Phone with Answering Machine User Manual

Model: CS1550

INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your VTech CS1550 DECT Cordless Phone with Answering Machine. Please read this manual thoroughly to ensure proper use and to take full advantage of all features.





Image: The VTech CS1550 DECT Cordless Phone, featuring a white handset and black base unit.

PACKAGE CONTENTS

Before beginning installation, ensure all items are present in your package:

- Cordless Handset
- Base Unit
- Power Adapter for Base Unit
- Telephone Line Cord
- Rechargeable NiMH Batteries (4x AAA size, typically)
- User Manual (this document)

SETUP

1. Battery Installation

1. Locate the battery compartment on the back of the handset.

2. Open the battery compartment cover.
3. Insert the supplied NiMH rechargeable batteries, observing the correct polarity (+ and -).
4. Close the battery compartment cover securely.

2. Base Unit Connection

1. Connect the power adapter to the base unit and plug it into a wall outlet.
2. Connect one end of the telephone line cord to the base unit and the other end to your telephone wall jack.
3. Place the base unit in a central location for optimal signal range.

3. Initial Handset Charging

Place the handset on the base unit to charge. The VTech CS1550 features a dual-charging design, allowing you to place the handset face down or face up. For initial use, charge the handset for at least 16 hours to ensure full battery capacity.



Image: The VTech CS1550 handset can be charged face down or face up on its base unit, offering flexible placement options.

4. Date and Time Setting

After initial charging, the handset will prompt you to set the date and time. Follow the on-screen instructions using the navigation

and OK buttons.

OPERATING INSTRUCTIONS

Making and Receiving Calls

- **To Make a Call:** Press the **Talk** button, then dial the number.
- **To Answer a Call:** Press the **Talk** button when the phone rings.
- **To End a Call:** Press the **End** button.

Speakerphone Function

During a call, press the **Speakerphone** button to activate hands-free communication. Press it again to return to handset mode.



Image: The speakerphone button on the VTech CS1550 handset allows for hands-free calling.

Caller ID and Call Waiting

The phone displays the name, number, time, and date of incoming calls. It stores up to 20 caller ID records. If you have Call Waiting service, the phone will alert you to a second incoming call.

ID appellant/ Appel en attente* — mémorise 20 appels




*Visualisation du numéro entrant avec ID appellant/appel en attente.
Le combiné affiche le nom, le numéro, l'heure et la date des appels entrants.*

Image: The handset display shows incoming caller ID details, including number, name, time, and date.

Redial Function

To redial one of the last 10 numbers called, press the **Redial** button and select the desired number from the list.

Rappel automatique des 10 derniers numéros composés

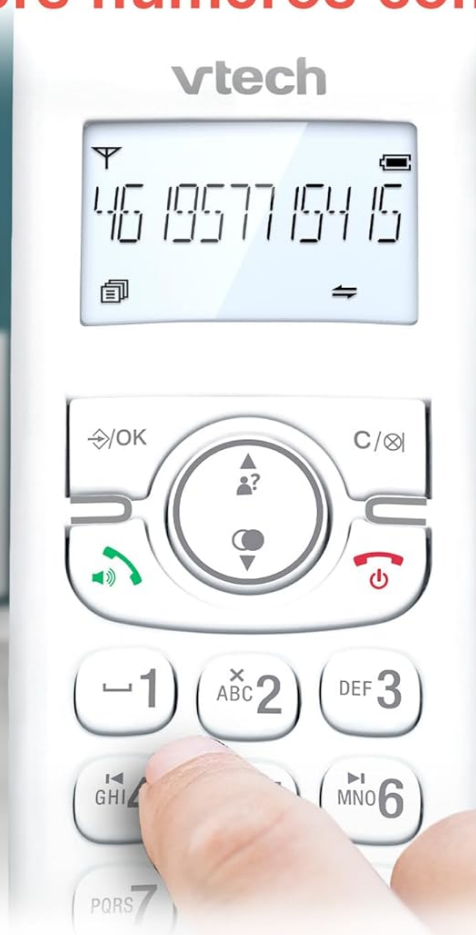

Recomposez les 10 derniers numéros appelés par simple pression sur un bouton.

Image: Easily redial the last 10 numbers by pressing the dedicated redial button on the handset.

Phonebook

The phonebook can store up to 60 names and numbers. Refer to the on-screen menu for instructions on adding, editing, and deleting entries.

Répertoire de 60 noms et numéros



Numéros souvent appelés faciles à enregistrer et à composer.

Image: The phonebook allows storage of up to 60 contacts for quick dialing.

Digital Answering Machine

The integrated answering machine records messages for up to 15 minutes. You can access messages from the handset or the base unit. Follow the menu prompts to set up your outgoing message and retrieve messages.

Répondeur automatique



“Hey Emma,
N'oublie pas
notre réunion”



Lorsque vous n'êtes pas en mesure de répondre à un appel, le répondeur s'avère très pratique avec une durée d'enregistrement pouvant atteindre 15 minutes.

Image: The answering machine feature records messages for up to 15 minutes when you are unavailable.

Nuisance Call Blocker

Block unwanted calls by adding up to 60 numbers to the blacklist. This feature prevents blocked numbers from ringing your phone.

Bloqueur d'appels importuns et indésirables



Enregistrez jusqu'à 60 noms et numéros dans la liste de blocage des appels pour empêcher les appels indésirables de sonner.

Image: The call blocker button allows you to add unwanted numbers to a blacklist, preventing future calls from ringing.

ECO Mode

ECO mode automatically adjusts and minimizes the radio frequency power based on the distance between the handset and the base unit, optimizing energy consumption.

Mode ECO



Le combiné ajuste et minimise automatiquement la puissance des fréquences radio en fonction de sa distance entre le combiné et l'unité de base.

Image: ECO mode automatically reduces power consumption based on handset proximity to the base unit.

Alarm and Mute Functions

Set alarms directly on the handset. During a call, you can mute your microphone for privacy by pressing the mute button.

Fonction d'alarme et de sourdine



Définissez des alarmes pratiques sur le combiné ou mettez votre voix en sourdine lors des appels lorsque vous avez besoin d'intimité.

Image: The phone includes alarm functionality and a mute feature for calls, enhancing user convenience and privacy.

Adjustable Ringer Volume and Melodies

Customize your phone's ringing experience by adjusting the ringer volume and selecting from available melodies through the handset menu.

Volume de la sonnerie et mélodie réglables



Réglez facilement le volume de la sonnerie et la mélodie souhaitée.

Image: Adjust the ringer volume and choose from various melodies to personalize your phone's alerts.

Backlit Display and Keypad

The handset features a backlit LCD screen and keypad, ensuring clear visibility and ease of use even in low-light conditions.

Afficheur rétroéclairé



L'ensemble de l'afficheur LCD s'illumine, ce qui facilite la visualisation dans des conditions de faible luminosité.

Image: The backlit display and keypad provide enhanced visibility in dark environments.

Long Range Coverage

The DECT technology provides reliable long-range coverage and clear audio quality throughout your home or office.

Longue portée fiable



Bénéficiez d'une couverture et d'une clarté longue portée dans toute votre maison.

Image: The phone offers extended range and clear communication across various areas of your property.

Battery Life

The handset provides up to 13 hours of talk time and up to 200 hours of standby time on a full charge.

Jusqu'à 13 heures d'autonomie en conversation



La batterie offre jusqu'à 13 heures d'autonomie en conversation et 200 heures en veille.

Image: The VTech CS1550 offers up to 13 hours of continuous talk time.

MAINTENANCE

Cleaning Your Phone

Wipe the phone and base unit with a soft, damp cloth. Do not use cleaning sprays or harsh chemicals, as they may damage the finish or electrical components.

Battery Care

Use only the supplied rechargeable NiMH batteries. Do not use alkaline, manganese, or other non-rechargeable batteries. If the phone will not be used for an extended period, remove the batteries to prevent leakage.

TROUBLESHOOTING

If you experience issues with your VTech CS1550, try the following steps:

- **No Dial Tone:** Ensure the telephone line cord is securely connected to both the base unit and the wall jack. Check if other phones on the same line are working.
- **Cannot Make/Receive Calls:** Verify the power adapter is properly connected to the base unit and a working power outlet. Ensure the handset batteries are charged.

- **Poor Sound Quality:** Move the handset closer to the base unit. Check for interference from other electronic devices.
- **Handset Not Charging:** Ensure the handset is correctly seated in the charging cradle. Clean the charging contacts on both the handset and base unit with a dry cloth.
- **Answering Machine Not Recording:** Check if the answering machine is turned on. Ensure there is sufficient recording time available.

For further assistance, refer to the detailed troubleshooting section in the full user manual or contact VTech customer support.

SPECIFICATIONS

Brand	VTech
Model Number	CS1550
Color	White
Phone Type	Cordless DECT
Compatible Devices	Switched telephone network (PSTN), potentially other analog telephone networks
Battery Composition	NiMH (4x AAA size included)
Talk Time	Up to 13 hours
Standby Time	Up to 200 hours
Answering Machine Recording Time	15 minutes
Phonebook Capacity	60 names and numbers
Call Blocker Capacity	Up to 60 numbers
Caller ID Records	20 records
Weight	275 Grams
Material	Plastic


WARRANTY INFORMATION

Specific warranty details for the VTech CS1550 DECT Cordless Phone are typically provided with your purchase documentation. Please refer to the warranty card or contact your retailer for information regarding warranty coverage and terms. Information regarding spare parts availability and software updates is not available in the provided product data.


CUSTOMER SUPPORT

For technical assistance, product inquiries, or service, please visit the official VTech website or contact VTech customer support directly. Contact information can usually be found on the VTech website or in the packaging materials.



VG 208 208-2  vtech User's manual	VTech VG208 / VG208-2 User Manual: Features, Safety, and Operation Guide Comprehensive user manual for the VTech VG208 and VG208-2 DECT 6.0 cordless phones. Learn about installation, operation, features like answering machine, caller ID, call blocking, intercom, safety instructions, and technical specifications.
	VTech IS8151 Smart Call Blocker: User Guide and Setup Learn how to use the VTech IS8151 Smart Call Blocker to filter robocalls and unwanted calls. This guide provides setup instructions, configuration options, and tips for managing your call lists for your DECT 6.0 cordless telephone system.
	AT&T DECT 6.0 Cordless Telephone Quick Start Guide - CL82115 Series Quick start guide for the AT&T DECT 6.0 cordless telephone and answering system (CL82115/CL82215/CL82315/CL82415/CL82465/CL82515). Learn about setup, features like Caller ID, Answering System, Bluetooth, and Smart Call Blocker.
	VTech CS2050/CS2051/CS2052/CS2053 Quick Start Guide Comprehensive guide to setting up and using your VTech CS2050, CS2051, CS2052, or CS2053 cordless phone system, including safety instructions, product registration, warranty information, and feature setup.
	VTech Smart Call Blocker VS112 Series: User Guide and Setup Learn how to set up and use the VTech Smart Call Blocker feature on your VS112 series DECT 6.0 cordless telephone system to filter robocalls and unwanted callers.
	VTech VS122-16 Cordless Phone Quick Start Guide A quick start guide for the VTech VS122-16 cordless phone, covering setup, features like Smart Call Blocker, Caller ID, Phonebook, Answering System, and Bluetooth connectivity.

Documents - VTech – CS1550

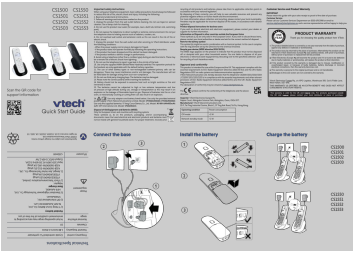

[pdf] Quick Start Guide Instructions Guide

Quick Start Guide CS150X CS155X UK QSG V3 231108 vtechphones eu assets b914b2f0 e916 4e3d b1ec 1554d04e2687 |||

CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Scan the QR code for support information Quick Start Guide Important safety instructions When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including...


lang:en score:33 filesize: 4.44 M page_count: 2 document date: 2023-11-08

[\[pdf\]](#) User Manual Quick Start Guide Instructions Guide

User Manual VTech CS1501 2 Handset Dual Charging DECT Cordless Phone with Call Block Caller ID
Waiting Handsfree Speakerphone Backlit Display and Keypad White Electronics Photo C1Aud2HpEcL m
media amazon images I |||

CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Scan the QR
code for support information Quick Start Guide Important safety instructions When
using your telephone equipment, basic safety precautions should always be followed
to reduce the risk of fire, electric shock and injury, including...

lang:en **score:30** filesize: 4.45 M page_count: 2 document date: 2023-06-22

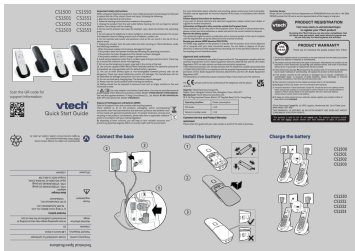


[\[pdf\]](#) Declaration of Conformity

Microsoft Word CS1550 CS1551 Declaration of Conformity CE docx VTT07806 English Product Support

Official VTech vtechphones eu assets 8d9d0734 62de 49b3 b14c 440ca3b3a24e |||

EU Declaration of Conformity Manufacturer Name: VTech Telecommunications
Limited Address: 23/F, Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po,
Hong Kong Product: DECT Phone Model Name: **CS1550**, CS1551 We, VTech,
declare under our sole responsibility that the above referenced product ...

lang:en **score:29** filesize: 78.52 K page_count: 1 document date: 2022-06-15

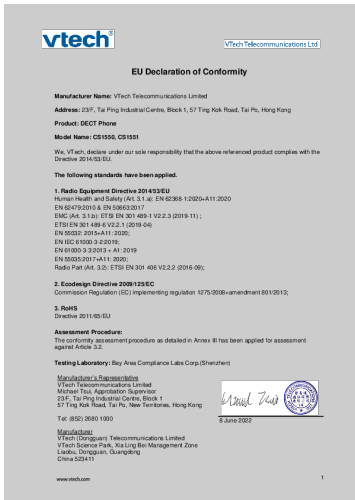


[\[pdf\]](#) Declaration of Conformity

Microsoft Word CS1550 CS1551 Declaration of Conformity CE docx VTT07806 Product Support Official

VTechProduct VTechcdn vtech jouets assets 08f32c79 69d3 4684 a7e0 582a7c27961c CEcdn |||

EU Declaration of Conformity Manufacturer Name: VTech Telecommunications
Limited Address: 23/F, Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po,
Hong Kong Product: DECT Phone Model Name: **CS1550**, CS1551 We, VTech,
declare under our sole responsibility that the above referenced product ...

lang:en **score:28** filesize: 78.53 K page_count: 1 document date: 2022-06-15

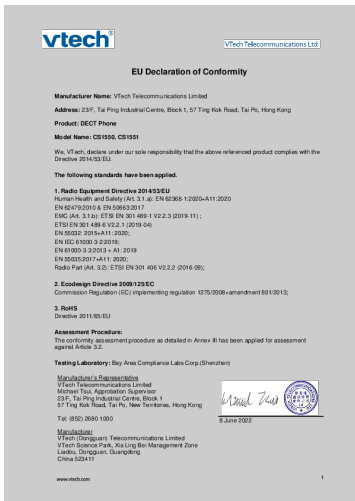



[\[pdf\]](#) Quick Start Guide Installation Guide Instructions Guide

Einlegen der Batterie Charge the battery Laden Sie VTech Telecommunication Ltd hereby declares that
this telephone CS1500 1501 1502 1503 CS1550 1551 1552 1553 is in compliance with essential A1KEpP
J6FL ref dp product quick view m media amazon images I |||

Scan the QR code for support information Scannen Sie den QR-Code fr
SupportInformationen Scannez le ... orte Scansiona il codice QR per ottenere
informazioni sull assistenza CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551
CS1552 CS1553 Connect the base c Schließen Sie die Basisstation an b a Install the
...

lang:en **score:28** filesize: 1.02 M page_count: 2 document date: 2023-12-06

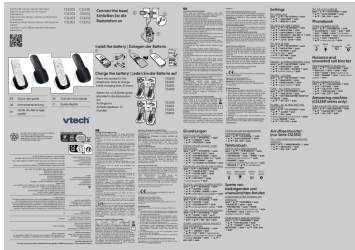

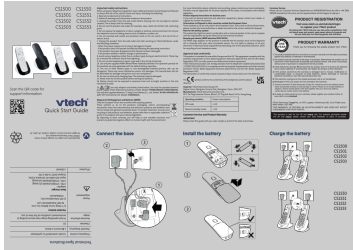


[\[pdf\]](#) Quick Start Guide Instructions Guide

English Product Support Official VTech CS150X CS155X UK QSG V1 220520 cdn vtech jouets assets 8405adf1 82d1 4c99 bc98 22cfb4333103 |||

CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Scan the QR code for support information Quick Start Guide Important safety instructions When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including...

lang:en **score:25** filesize: 4.45 M page_count: 2 document date: 2022-05-20

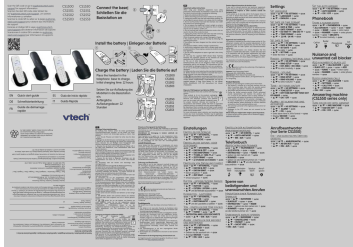

[VTech CS1500/CS1550 Series Cordless Phone Quick Start Guide and User Information](#)

This document provides essential setup instructions, safety guidelines, feature configurations, and technical specifications for the VTech CS1500 and CS1550 series cordless phones. It includes multilingual support and warranty details.

lang:en **score:23** filesize: 15.58 M page_count: 2 document date: 2022-04-13



[\[pdf\]](#) User Manual Installation Guide Instructions Troubleshooting Guide

VTech CS1501 Casa Duo Cordless Telephone DECT Landline Phone with Handsfree and Call Block Dual Charge ID LCD Backlit Display Keyboard ECO Mode White Amazon it ElectronicsA1emFVIUnaLm media amazon images | A1emFVIUnaL |||

CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scan the QR code for support information Congratul ... pment. VTech Telecommunication Ltd. hereby declares that this telephone CS1500/CS1501/CS1502/CS1503/**CS1550**/ CS1551/CS1552/CS1553 is in compliance with the essential requirements and other relevant pro...

lang:en **score:23** filesize: 1.51 M page_count: 24 document date: 2024-02-20





[pdf] Declaration of Conformity

Microsoft Word CS155X Declaration of Conformity docx VTT07806 English Product Support Official

VTech vtechphones eu assets d7b51052 1288 482f a964 a1c6dc650dcd |||

UKCA Declaration of Conformity Manufacturer Name: VTech Telecommunications Limited Address: 23/ ... nce Park, Abingdon, Oxfordshire, OX14 3YT, United Kingdom

Product Model Name: DECT phone Model No.: **CS1550**/CS1551/CS1552/CS1553

We, Vtech Telecommunications Limited. hereby declares that the above equ...

lang:en score:22 filesize: 114.86 K page_count: 1 document date: 2023-03-24



[pdf] User Manual Installation Guide Instructions Troubleshooting Guide

CS 1500 1501 1502 1503 1550 1551 1552 1553 2023 11 14 — When using your telephone equipment

basic safety precautions should always be followed to reduce the risk of fire electric shock and injury

including CS150x CS155x UK WEBCIB v1 231108 vtechphones eu assets 7367b8c2 58f3 448e 91e1

6a11ee5e9cfa |||

CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scan the QR code for support

information Congratul ... pment. VTech Telecommunication Ltd. hereby declares that

this telephone CS1500/CS1501/CS1502/CS1503/**CS1550**/ CS1551/CS1552/CS1553

is in compliance with the essential requirements and other relevant pro...

lang:en score:20 filesize: 14.61 M page_count: 24 document date: 2023-11-08



[pdf] User Manual Installation Guide Instructions Troubleshooting Guide

CS150x CS155x UK WEBCIB v2 240529 vtechphones eu assets 506d6229 2433 47e7 b475

e0eff3160e00 |||

CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scan the QR code for support

information Congratul ... pment. VTech Telecommunication Ltd. hereby declares that

this telephone CS1500/CS1501/CS1502/CS1503/**CS1550**/ CS1551/CS1552/CS1553

is in compliance with the essential requirements and other relevant pro...


lang:en score:19 filesize: 14.64 M page_count: 24 document date: 2024-05-29



[\[pdf\]](#) User Manual Installation Guide Instructions Troubleshooting Guide

CS150x CS155x DE EN WEBCIB v2 240529 vtechphones eu assets 8a03efd3 6725 47c5 9689 5898322d4c19 |||


CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scan the QR code for support information Congratul ... pment. VTech Telecommunication Ltd. hereby declares that this telephone CS1500/CS1501/CS1502/CS1503/**CS1550**/ CS1551/CS1552/CS1553 is in compliance with the essential requirements and other relevant pro...
lang:en **score:19** filesize: 14.72 M page_count: 24 document date: 2024-05-29

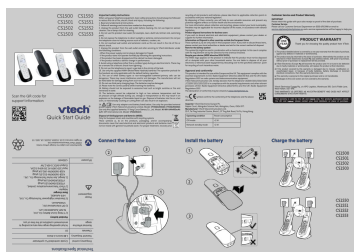

[\[pdf\]](#) Quick Start Guide Instructions Guide

CS150X CS155X UK QSG V3 231108 vtechphones eu assets bb46ac56 28a1 476e b64c 9dd7731c32f6 |||


CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Scan the QR code for support information Quick Start Guide Important safety instructions When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including...
lang:en **score:19** filesize: 4.54 M page_count: 2 document date: 2023-11-08

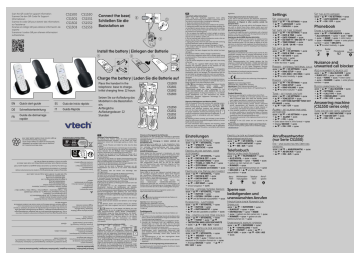

[\[pdf\]](#) Quick Start Guide Installation Guide Instructions Guide

CS150X CS155X QSG V4 0 230314 EU 5 langs vtechphones eu assets acad1b6b c40e 4e88 8f6c e1d7ded4e475 |||

Scan the QR code for support information Scannen Sie den QR-Code fr SupportInformationen Scannez le ... orte Scansiona il codice QR per ottenere informazioni sull assistenza CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Connect the base c Schließen Sie die Basisstation an b a Install the ...
lang:en **score:19** filesize: 15.71 M page_count: 2 document date: 2023-03-14

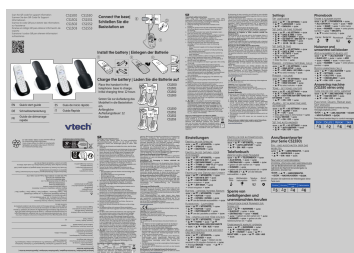

[\[pdf\]](#) Quick Start Guide Installation Guide Instructions Guide

Batterie Charge the battery Connect base Schließen Sie die Basisstation an Install Einlegen der Laden CS150X CS155X QSG V5 230926 EU 5 langs vtechphones eu assets 5c8dfd8f 2e0b 4f0f b9f7 db7860489e0f |||

Scan the QR code for support information Scannen Sie den QR-Code fr SupportInformationen Scannez le ... orte Scansiona il codice QR per ottenere informazioni sull assistenza CS1500 CS1501 CS1502 CS1503 **CS1550** CS1551 CS1552 CS1553 Connect the base c Schließen Sie die Basisstation an b a Install the ...
lang:en **score:19** filesize: 16.99 M page_count: 2 document date: 2023-09-26



[\[pdf\]](#) Instructions

CS150x CS155x DE EN WEBCIB v1 230817 FR 240611 vtechphones eu assets 4a2ab66f 88ca 4cee b196 a7b9d16ccb49 |||

CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scannez le code QR pour obtenir des informations F ... ie. VTech Telecommunication Ltd. dclare par la prsente que ce tlphone CS1500/CS1501/CS1502/ CS1503/**CS1550**/CS1551/CS1552/CS1553 est conforme aux exigences essentielles et aux autres dispositions perti...
lang:fr **score:18** filesize: 2.1 M page_count: 46 document date: 2024-06-11



[\[pdf\]](#) Instructions

CS150x CS155x DE EN WEBCIB v1 230817 FR CS 1500 1501 1502 1503 1550 1551 1552 1553 vtechphones eu assets 8a7ed660 9fd6 4cb3 b246 453ebb3fa9a0 |||

CS 1500 1501 1502 1503 CS 1550 1551 1552 1553 Scannez le code QR pour obtenir des informations F ... ie. VTech Telecommunication Ltd. dclare par la prsente que ce tlphone CS1500/CS1501/CS1502/ CS1503/**CS1550**/CS1551/CS1552/CS1553 est conforme aux exigences essentielles et aux autres dispositions perti...
lang:fr **score:18** filesize: 2.26 M page_count: 46 document date: 2023-11-29