

EPICKA TA-105 Max

EPICKA TA-105 Max 75W Universal Travel Adapter

Instruction Manual

[Safety Information](#) [Package](#)

[Contents](#) [Setup](#) [Operation](#) [Maintenance](#) [Troubleshooting](#) [Specifications](#) [Warranty & Support](#)

INTRODUCTION

Thank you for choosing the EPICKA TA-105 Max 75W Universal Travel Adapter. This all-in-one adapter is designed to provide convenient and fast charging for your electronic devices across over 200 countries and regions. Featuring advanced GaN technology, multiple USB-C PD and USB-A Quick Charge ports, and a versatile AC outlet, it is your ideal travel companion.



Image: The EPICKA TA-105 Max 75W Universal Travel Adapter, a compact black device with various plug configurations visible, highlighting its versatility.

SAFETY INFORMATION

Please read and understand all safety instructions before using this product. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- **Voltage Conversion:** This adapter **DOES NOT** convert voltage. Ensure that any AC-powered device you intend to use abroad supports dual voltage (e.g., "100-240V, 50/60Hz" printed on your device).
- **High-Power Appliances:** Appliances over 2000W (e.g., many hair dryers, irons) are not recommended for use with this adapter, even if they support dual voltage. The built-in 10A fuse is designed to pop to prevent damage in such cases.
- **Specific Devices:** For electric toothbrushes, shavers/trimmers, water flossers, garment steamers, and hair straighteners, always check their specifications for dual voltage compatibility before travel.

- **Indoor Use Only:** This adapter is designed for indoor use.
- **Children:** Keep out of reach of children.
- **Moisture:** Do not expose to liquid or moisture.
- **Fuse:** The adapter includes a built-in 10A fuse for safety. Ensure any replacement fuse matches the adapter's model and current requirements.

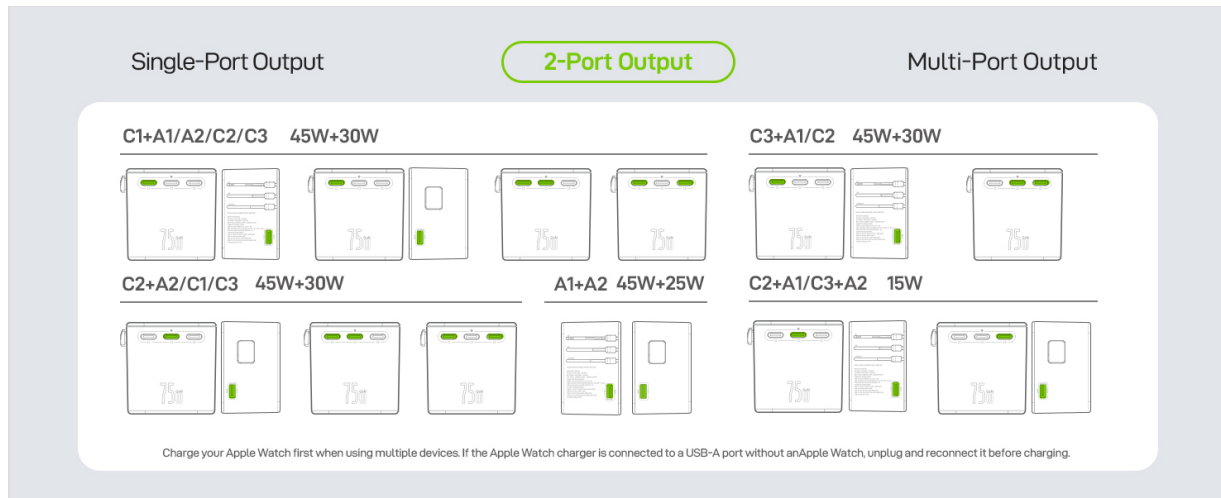


Image: A graphic illustrating that the adapter is not a voltage converter, showing compatible and incompatible devices based on voltage requirements.

PACKAGE CONTENTS

Verify that all items are present in your package:

- 1x EPICKA Universal Travel Adapter (TA-105 Max)
- 1x User Manual
- 1x Carry Bag
- 2x Extra Fuses (10A)

ADVANCED GaN TECHNOLOGY

Lighter/Faster/Safer

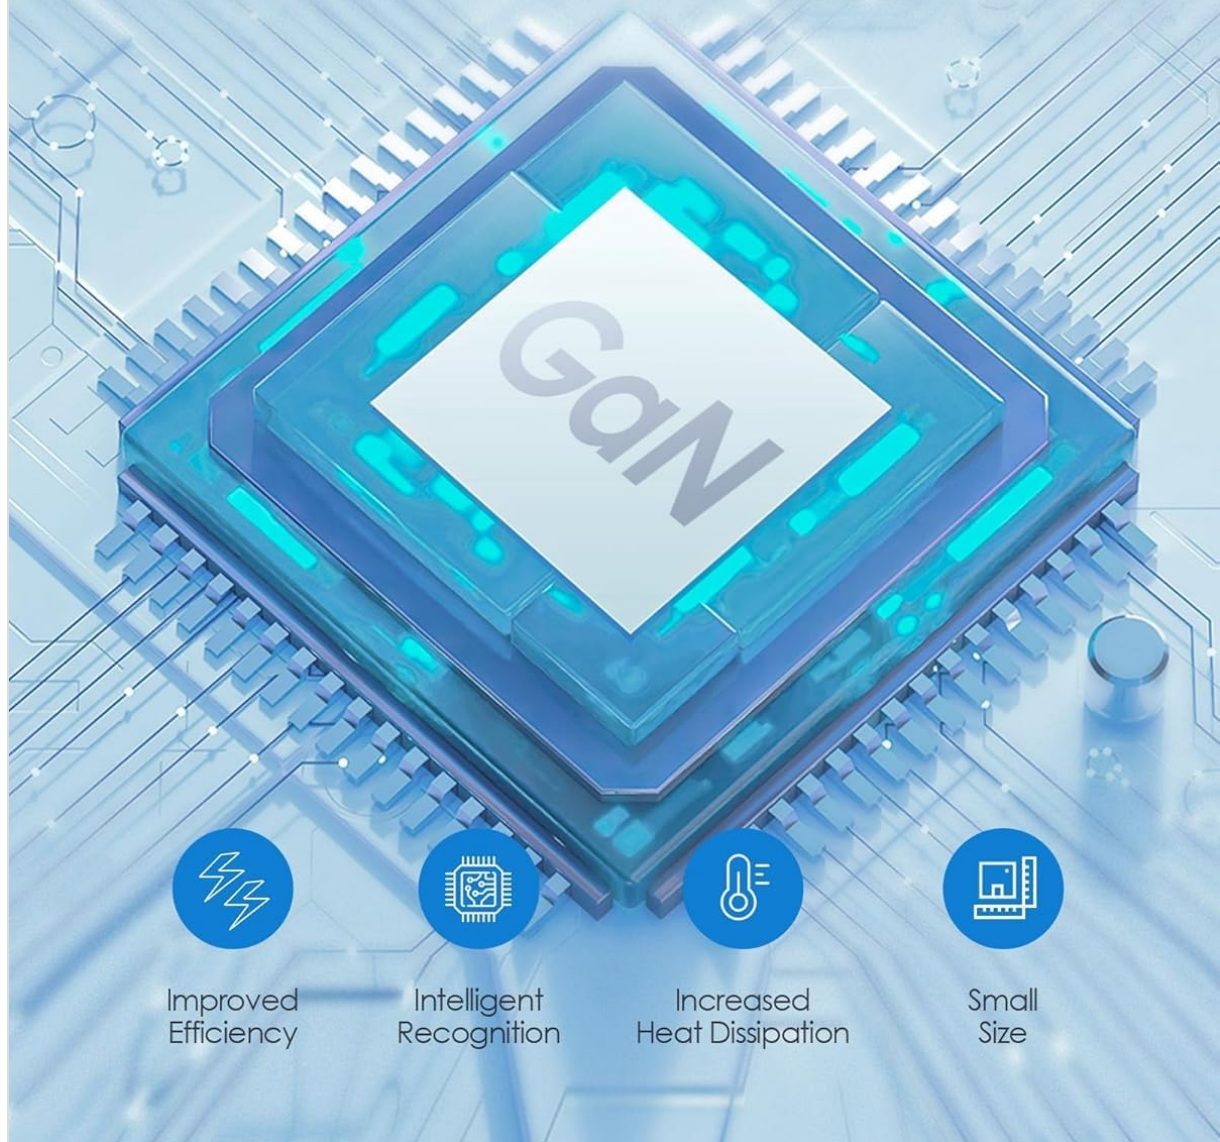


Image: The EPICKA Universal Travel Adapter, its carry bag, user manual, and extra fuses laid out on a surface.

SETUP

The EPICKA TA-105 Max features an all-in-one design with retractable plugs for various regions. To deploy a specific plug type:

1. Identify the slider corresponding to the desired region (EU, UK, USA/AUS).
2. Slide the appropriate button forward until the plug prongs extend and lock into place.
3. To retract the plug, press the release button on the side of the adapter while sliding the plug back into its housing.

Plug Types:

- **Type C (EU/KR Plug):** For most of Europe (France, Germany, Italy, Spain, Iceland, Greece, etc.).
- **Type G (UK Plug):** For UK, Ireland, HK, Malaysia, Singapore.
- **Type A (USA/JP Plug):** For USA, Mexico, Canada, Japan.
- **Type I (AUS/CN Plug):** For China, Australia, New Zealand, Argentina.

WORKS IN 200+ COUNTRIES & REGIONS

The EU plug fits all **Type C family sockets**

Plug Type	Regions/Countries
Type C (Generic Version)	Most of Europe
Type E	France, Belgium, Poland
Type F	Germany and most of Europe
Type H	Israel, West Bank, Gaza Strip
Type J	Switzerland, Liechtenstein
Type K	Denmark, Greenland
Type L	Italy, Chile, San Marino
Type N	Brazil, South Africa
Type O	Thailand
Type A	USA, Canada, Mexico, Japan
Type B	USA, Canada, Mexico, Japan
Type I	Australia, Argentina, China, New Zealand
Type G	UK, Singapore, Ireland, Malaysia

* The 105 Max fits 13 of the 15 socket types worldwide. Please note that it is **not** compatible with **D-type** (mainly used in India) and **M-type** (mainly used in South Africa) sockets.

Image: A graphic illustrating the four main plug types (USA, AUS, UK, EU) and their corresponding regions, demonstrating the adapter's universal compatibility.

Universal AC Socket:

The adapter features a universal AC socket that accepts various plug types from EU, UK, AU, and China. This allows you to plug in your existing wall chargers or devices directly into the adapter.

EPICKA for Borderless Work

Image: A visual representation of the universal AC socket accepting different plug types (Type A/B, Type C/E/F/J/L/N, Type G, Type I).

OPERATING INSTRUCTIONS

The EPICKA TA-105 Max provides multiple charging options for your devices:

AC Outlet Usage:

1. Select and deploy the appropriate regional plug for the wall socket you are using.
2. Ensure your device is dual voltage compatible if plugging into the AC outlet in a country with different voltage.
3. Insert your device's plug into the universal AC socket on the adapter.

USB Charging:

The adapter is equipped with 3 USB-C PD (Power Delivery) ports and 2 USB-A QC (Quick Charge) ports, offering up to 75W fast charging. These ports are ideal for smartphones, tablets, USB-powered laptops, smartwatches, fitness trackers, power banks, cameras, and handheld game consoles.

- Connect your device's USB charging cable to the corresponding USB-C or USB-A port on the adapter.
- The adapter will automatically detect and deliver the optimal charging speed for your device.



Image: The EPICKA adapter plugged into a wall outlet, simultaneously charging a laptop, tablet, and multiple smartphones via its USB ports and AC outlet.

GaN Technology:

The integrated GaN (Gallium Nitride) technology allows for a compact size while providing high power output, improved efficiency, intelligent recognition, and increased heat dissipation for safer and faster charging.



Image: A graphic illustrating the benefits of advanced GaN technology, including lighter, faster, safer charging, improved efficiency, intelligent recognition, increased heat dissipation, and small size.

Video: EPICKA TA-105 Pro Universal Travel Adapter Overview

Video Description: A short video demonstrating the features and functionality of the EPICKA TA-105 Pro Universal Travel Adapter, showcasing its various plug types and charging ports.

MAINTENANCE

Fuse Replacement:

The EPICKA TA-105 Max includes a built-in 10A fuse for protection against overloads. If the adapter stops working, the fuse may have blown and needs replacement. Two spare 10A fuses are included in the package.

1. Locate the "SPARE & FUSE" panel on the back of the device.
2. Using a small screwdriver or similar object, gently pry out the side of the panel to remove it.
3. Once the panel is removed, you will see the blown fuse and a spare fuse holder.
4. Remove the blown fuse from its holder and replace it with one of the spare 10A fuses.
5. Re-seal the panel securely.

Video: How to replace the blown fuse on universal travel adapter

Video Description: A step-by-step guide on how to safely replace a blown fuse in the EPICKA Universal Travel Adapter, including locating the fuse panel and inserting a new fuse.

General Care:

- Clean the adapter with a dry, soft cloth. Do not use abrasive cleaners or solvents.
- Store the adapter in its provided carry bag when not in use to protect it from dust and damage.

TROUBLESHOOTING

• Device not charging:

- Ensure the adapter is securely plugged into a live wall outlet.
- Verify that the correct regional plug is fully extended and locked.
- Check if your device's charging cable is properly connected to the adapter.
- Confirm your device is dual voltage compatible if using the AC outlet.
- Check the adapter's fuse (refer to the Maintenance section for replacement).

• Slow charging:

- Ensure you are using a high-quality charging cable that supports fast charging.
- Some devices may limit charging speed if multiple devices are connected simultaneously.

• Adapter feels warm:

It is normal for the adapter to feel warm during operation, especially when charging multiple devices or high-power devices. If it becomes excessively hot or emits smoke, immediately unplug it and discontinue use.

SPECIFICATIONS

Feature	Detail
Model	TA-105 Max
Product Dimensions	3.3 x 2.1 x 2.2 inches
Item Weight	10.2 ounces
AC Input	100-240V, 50-60Hz
Max Power	1000W at 100V, 2400W at 240V
Max Current	10A Max
USB-C Output (PD3.0)	3 ports, up to 75W total
USB-A Output (QC3.0)	2 ports, up to 75W total
Plug Format	Type C, Type G, Type I, Type A
Safety Features	Built-in 10A fuse, safety shutters, separate plug lock system

Certifications	RoHS, CE, FCC
----------------	---------------

WARRANTY AND SUPPORT

The EPICKA TA-105 Max Universal Travel Adapter comes with a **2-year limited warranty** from the date of purchase. This warranty covers manufacturing defects and ensures peace of mind for your travels.

For technical support, warranty claims, or any questions regarding your product, please contact EPICKA customer service through the retailer where you purchased the product or visit the official EPICKA website.