

[manuals.plus](#) /› [VONYX](#) /› [Vonyx Verve38 Portable PA System User Manual](#)**VONYX Verve38**

Vonyx Verve38 Portable PA System User Manual

Model: Verve38 | Brand: VONYX

1. INTRODUCTION

Thank you for purchasing the Vonyx Verve38 Portable PA System. This manual provides essential information for the safe and efficient operation of your device. Please read this manual thoroughly before use and retain it for future reference.

1.1 Important Safety Instructions

- **Power Source:** Ensure the power supply matches the voltage specified on the unit. Use only the provided power cable.
- **Water and Moisture:** Do not expose the unit to rain or moisture to prevent fire or electric shock. Do not place objects filled with liquids, such as vases, on the unit.
- **Ventilation:** Ensure adequate ventilation. Do not block ventilation openings.
- **Heat:** Keep the unit away from heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- **Cleaning:** Clean only with a dry cloth.
- **Servicing:** Do not attempt to service the unit yourself. Refer all servicing to qualified service personnel.
- **Battery Safety:** The unit contains a lead-acid battery. Do not expose to extreme temperatures or dispose of in fire. Recycle batteries responsibly.
- **Placement:** Place the unit on a stable, level surface. If using a tripod, ensure it is stable and rated for the unit's weight.

2. PACKAGE CONTENTS

Please check that all items are present and in good condition upon unpacking:

- Vonyx Verve38 Portable PA System
- 2x UHF Wireless Microphones
- Remote Control
- Power Cable

- User Manual

3. PRODUCT OVERVIEW

Familiarize yourself with the components and controls of your Vonyx Verve38 PA system.

3.1 Front and Side View



Image 3.1: The Vonyx Verve38 Portable PA System, showing the main speaker unit, two wireless microphones, and the remote control. The speaker features a trolley handle and wheels for portability.



Image 3.2: Front view of the Vonyx Verve38 Portable PA System, highlighting the speaker grille and horn tweeter.





Image 3.3: Side view of the Vonyx Verve38 Portable PA System with its retractable trolley handle extended, demonstrating its portability.

3.2 Rear Control Panel



Image 3.4: The rear control panel of the Vonyx Verve38 Portable PA System, detailing all input/output connections and

control knobs.



Image 3.5: A closer view of the Vonyx Verve38's rear control panel, highlighting the media player display, microphone inputs, and equalization controls.

1. **Media Player:** USB port, SD card slot, Bluetooth receiver, and display for media playback.
2. **MIC INPUT:** XLR and 6.3mm Jack inputs for wired microphones.
3. **AUX INPUT:** RCA and 3.5mm Jack inputs for external audio devices.
4. **LINE OUT:** RCA output for connecting to another audio system.
5. **MIC LEVEL:** Adjusts the volume of connected microphones.
6. **BASS/TREBLE:** Equalizer controls for adjusting low and high frequencies.
7. **ECHO:** Controls the echo effect for microphones.
8. **MASTER VOLUME:** Overall volume control for the system.
9. **UHF Wireless Microphone Section:** Indicators and controls for the two wireless microphones.
10. **Battery Information:** LED indicators for battery charge status.
11. **POWER:** Main power switch.
12. **AC INPUT:** Connection for the power cable to charge the battery and operate the unit.

3.3 Wireless Microphones and Remote Control



Image 3.6: The two included UHF wireless microphones and the remote control for the media player functions.

4. SETUP

4.1 Initial Charging

Before first use, fully charge the internal battery. Connect the power cable to the AC INPUT on the rear panel and plug it into a suitable power outlet. The battery indicator LEDs will show the charging status. A full charge can take several hours.

4.2 Powering On/Off

Locate the POWER switch on the rear panel. Flip it to the 'ON' position to power on the system. Flip it to 'OFF' to power down.

4.3 Wireless Microphone Setup

1. Open the battery compartment of each wireless microphone and insert the required batteries (not specified in product data, typically AA or 9V).
2. Turn on the microphones using their respective power switches.
3. The PA system should automatically detect and pair with the microphones. Ensure the UHF Wireless Microphone section on the rear panel indicates activity.

4.4 Positioning the PA System

Place the PA system on a stable, flat surface. For optimal sound projection, consider placing it at ear level. The unit also features a 35mm tripod mount on the bottom for use with a speaker stand (sold separately).

5. OPERATING INSTRUCTIONS

5.1 Media Player Functions

The integrated media player supports USB, SD card, and Bluetooth playback.

- **USB/SD Playback:** Insert a USB drive or SD card into the respective slot. The system will automatically switch to USB/SD mode and begin playing compatible audio files. Use the media player controls or the remote control to navigate tracks, play/pause, and adjust volume. The display shows ID3 tag information for MP3 files.
- **Bluetooth Connection:**
 - a. Ensure the PA system is powered on.
 - b. Activate Bluetooth on your smartphone or other device.
 - c. Select "Vonyx Verve38" (or similar name) from the list of available devices.
 - d. Once paired, you can stream audio wirelessly from your device to the PA system.
- **AUX Input:** Connect external audio sources (e.g., CD player, laptop) using a 3.5mm jack cable or RCA cables to the AUX INPUT ports. Select the AUX input mode on the media player.

5.2 Microphone Usage

- **Wireless Microphones:** Turn on the wireless microphones. Adjust their volume using the MIC LEVEL control on the rear panel.
- **Wired Microphones:** If using wired microphones (not included), connect them to the MIC INPUT (XLR or 6.3mm Jack) and adjust their volume with the MIC LEVEL control.
- **Echo Effect:** Use the ECHO control to add a reverberation effect to the microphone audio.
- **Signal Priority:** The 'MIC PRIORITY' function (if available, check panel) allows microphone audio to automatically lower the music volume when speaking.

5.3 Audio Adjustments

- **BASS/TREBLE:** Use these controls to adjust the low (bass) and high (treble) frequencies of the overall sound output to suit your preference or environment.
- **MASTER VOLUME:** This knob controls the total output volume of the PA system. Adjust it carefully to avoid distortion.

6. MAINTENANCE

6.1 Cleaning

Wipe the exterior of the unit with a soft, dry cloth. Do not use abrasive cleaners or solvents. Keep the speaker grilles free of dust and debris.

6.2 Battery Care

- To maximize battery life, fully charge the unit after each use.
- If storing the unit for an extended period, charge the battery every 3 months to prevent deep discharge.
- The battery is a sealed lead-acid type. Do not attempt to replace it yourself; contact qualified service

personnel if replacement is needed.

6.3 Storage

Store the PA system in a cool, dry place, away from direct sunlight and extreme temperatures.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power cable not connected; Battery discharged; Power switch off.	Connect power cable and charge; Turn power switch ON.
No sound output	Master Volume too low; Input source not selected; Input device not connected/playing.	Increase Master Volume; Select correct input mode (BT, USB, SD, AUX); Ensure input device is connected and playing.
Wireless microphone not working	Microphone off; Batteries low/dead; Microphone volume (MIC LEVEL) too low.	Turn on microphone; Replace batteries; Increase MIC LEVEL.
Bluetooth connection fails	PA system not in Bluetooth mode; Device too far; Device already connected to another unit.	Ensure PA system is in BT mode; Move device closer; Disconnect from other devices and try again.
Distorted sound	Volume too high (Master, Mic, or Input); Input signal too strong.	Reduce Master Volume, MIC LEVEL, or input device volume.

8. SPECIFICATIONS

Feature	Specification
Output Power (Max)	800W
Output Power (RMS)	400W
Frequency Response	45Hz - 18,000Hz
Tweeter Diameter	1" (Titanium compression driver)
Woofer Diameter	12" (Ferrite magnet)
Battery Type	12V - 7.2Ah Lead Acid
Battery Operation Time	Up to 7 hours
Input Connections	3.5mm Jack, 6.3mm Jack, RCA, SD, USB, XLR (3-pin)
Output Connections	RCA
Wireless Microphone Frequencies	863.100 MHz, 864.500 MHz
Power Supply	100-240V AC 50/60Hz
Dimensions (L x W x H)	43 x 36 x 67 cm

Feature	Specification
Weight	15.4 kg
Material	Acrylonitrile Butadiene Styrene (ABS)
Connectivity Technology	Bluetooth, USB

9. WARRANTY AND SUPPORT

9.1 Warranty Information

This product is covered by a manufacturer's warranty. Spare parts availability in the EU is guaranteed for 2 years from the date of purchase. Please retain your proof of purchase for any warranty claims.

9.2 Technical Support

For technical assistance, troubleshooting beyond this manual, or warranty inquiries, please contact your retailer or the manufacturer's customer service. Refer to the contact information provided with your purchase documentation.

Related Documents - Verve38

 Vonyx SBS55B Karaoke Sp.2 Micro BT LED INSTRUCTION MANUAL GEBRÜCKSANWEISUNG GEBRÄUCHSANLEITUNG MANUALE DI ISTRUZIONI MANUAL DE INSTRUCCIONES INSTRUKCJA OBSŁUGI V1.0	<p>Vonyx SBS55B Karaoke Sp.2 Micro BT LED - Instruction Manual</p> <p>Comprehensive instruction manual for the Vonyx SBS55B Karaoke Sp.2 Micro BT LED speaker, covering safety, setup, operation, and technical specifications.</p>
 Vonyx WGS20 Wireless Guitar System 16-Channel UHF INSTRUCTION MANUAL GEBRÜCKSANWEISUNG GEBRÄUCHSANLEITUNG MANUALE DI ISTRUZIONI MANUAL DE INSTRUCCIONES INSTRUKCJA OBSŁUGI V1.0	<p>Vonyx WGS20 Wireless Guitar System 16-Channel UHF Instruction Manual</p> <p>Instruction manual for the Vonyx WGS20 Wireless Guitar System, a 16-channel UHF audio transmission device. Learn about its features, operation, frequency changing, re-pairing methods, and important safety guidelines for optimal performance and longevity.</p>
 VONYX AV510 Optical Karaoke Contr.2UHF BT INSTRUCTION MANUAL GEBRÜCKSANWEISUNG GEBRÄUCHSANLEITUNG MANUALE DI ISTRUZIONI MANUAL DE INSTRUCCIONES INSTRUKCJA OBSŁUGI V1.0	<p>VONYX AV510 Optical Karaoke Contr.2UHF BT Instruction Manual</p> <p>Instruction manual for the VONYX AV510 Optical Karaoke Controller with 2 UHF BT microphones, covering setup, operation, safety, and technical specifications.</p>

 <p>INSTRUCTION MANUAL GEBRÜCKSANWEISUNG GEBRÄUCHSANLEITUNG MANUAL DE INSTRUCCIONES MANUEL D'INSTRUCTIONS INSTRUCCIA OSNOVNI</p> <p>V1.1</p>	<p><u>VONYX WM55 Wireless Microphone Instruction Manual</u></p> <p>Comprehensive instruction manual for the VONYX WM55 Wireless Microphone, covering setup, operation, safety precautions, and technical specifications. Includes multilingual safety information.</p>
 <p>INSTRUCTION MANUAL COMIENZOS DE USO GEBRÄUCHSANLEITUNG MANUAL DE INSTRUCCIONES MANUEL D'INSTRUCTIONS INSTRUCCIA OSNOVNI</p> <p>V1.0</p>	<p><u>Vonyx WM55 Wireless Microphone User Manual</u></p> <p>Comprehensive user manual for the Vonyx WM55 Wireless Microphone, covering setup, operation, safety precautions, and technical specifications.</p>
 <p>SBS50 Party Speaker Series Part no. 170.340, 170.341, 170.342, 170.343</p> <p>INSTRUCTION MANUAL GEBRÜCKSANWEISUNG GEBRÄUCHSANLEITUNG MANUAL DE INSTRUCCIONES MANUEL D'INSTRUCTIONS INSTRUCCIA OSNOVNI</p> <p>V1.1</p>	<p><u>Vonyx SBS50 Party Speaker Series Instruction Manual</u></p> <p>Comprehensive instruction manual for the Vonyx SBS50 Party Speaker Series, covering setup, operation, safety precautions, and technical specifications. Available in multiple languages.</p>

Documents - VONYX – Verve38



[\[pdf\] User Manual Instructions Warranty](#)

INSTRUCTION MANUAL GEBRUIKSAANWIJZING eBayENGLISH Congratulations to the purchase of this Vonyx product Please read manual thoroughly prior using in order to df065738 ad4e 4361 9e08 967620cd2a8bdocs ebay document df065738 967620cd2a8b |||

Verve Series Portable System 12 15 Ref. nr.: 174.032; 174.034; 174.038

INSTRUCTION MANUAL GEBRUIK ... type Input connections Output connections

Power supply Dimensions L x W x H Weight kg Ref.nr.: **VERVE38** VERVE46 BT

streaming, FM radio, SD, USB 800W 1000W 400W 500W 12V 7.2Ah 45Hz 18KHz ...

lang:en **score:41** filesize: 1.02 M page_count: 39 document date:

StrumentiMusicali.net giovedì 08 giugno, 2023

VONYX Verve38 Port.system 12 Uhf 800w

No image

VONYX
Cod.Art.: 179588

Il Verve Mobile PA System è un sistema audio potente e versatile. Ideale per feste, eventi e spettacoli. Con il suo grande subwoofer e l'elevata potenza musicale, questo sistema PA portatile è in grado di offrire un suono forte, chiara e di alta qualità che è difficilmente superabile. Il Verve Mobile PA System è il dispositivo principale Verve e la sua connettività BT. Ciò ti consente di ricevere una connessione senza fili con un smartphone, tablet o altro dispositivo abilitato BT. Il sistema include anche un microfono a condensatore professionale Verve e un'altra preseguente per essere utilizzato portatile e facile da trasportare. Il sistema è dotato di una comoda maniglia del cavo per trasportare il tutto con facilità. Inoltre, il Verve include anche una batteria ricaricabile che fornisce fino a 7 ore di autonomia. Il Verve Mobile PA System è un dispositivo portatile che non ha nulla di cui tu devi preoccuparti. Oltre al suono potente e al design portatile, il Verve include anche una serie di altre caratteristiche che lo rendono un'unità completa. Incluso nel Verve Mobile PA System c'è un mixer integrato con controlli EQ ed effetti, due ingressi per il collegamento di sorgeri audio esterni. Nel complesso, il Verve Mobile PA System è un sistema audio impressionante e versatile, perfetto per una varietà di applicazioni. Con il suo design elegante e il suo suono superiore, chi lo sta organizzando una festa, una manifestazione o un'installazione sul palco, questo sistema non ha nulla di cui tu devi preoccuparti per ottenere prestazioni potenti e professionali.

Caratteristiche
Sistema audio portatile tutto in uno
Subwoofer di 12 pollici con effetti eco
Semplice da configurare e utilizzare
Fare un background tecnico richiesto
Porta USB e SD per schede SD e ingresso AUX

StrumentiMusicali.net - <https://www.strumentimusicali.net> - info@strumentimusicali.net

Pagina 1/2

[\[pdf\] Datasheet Declaration of Conformity](#)

VONYX Verve38 Port system 12 Uhf 800w Strumenti Musicali 4 giorni fa — Il Verve Mobile PA System è un sistema audio potente e versatile perfetto per feste eventi spettacoli Con il suo grande doc strumentimusicali net datasheet products id 179588 |||

VONYX **Verve38** Port.system 12 Uhf 800w giovedì 08 giugno, 2023 No image

Cod.Art. : 179588 Il Verve Mobile PA System un sistema audio potente e versatile, li.n perfetto per feste, eventi e spettacoli. Con il suo grande subwoofer e l'elevata potenza musicale, questo sistema PA portatile in grado di ...

lang:it **score:33** filesize: 20.97 K page_count: 2 document date: 2023-06-08

VONYX Verve Series Portable System 12'' & 15''
Ref. nr.: 174.032; 174.034; 174.038

INSTRUCTION MANUAL
GEBRUIKSAANWIJZING
GEBRAUCHSANLEITUNG
MANUAL DE INSTRUCCIONES
MANUEL D'INSTRUCTIONS
INSTRUKCJA OBSŁUGI
NAVOD K POUŽITÍ

V1.0

[\[pdf\] User Manual Instructions Warranty](#)

PARTS DESCRIPTION sky VONYX VERVE46W ΦΟΡΗΤΟ ΣΥΣΤΗΜΑ ΗΧΟΥ 15 WHITE Ηχεία

Μποταρίας DJShop 174 032 034 038 Verve Series Portable System 12 inch manual V1 0 djshop gr Attachment DownloadFile Id 16006 |||


Verve Series Portable System 12 15 Ref. nr.: 174.032; 174.034; 174.038

INSTRUCTION MANUAL GEBRUIK ... type Input connections Output connections

Power supply Dimensions L x W x H Weight kg Ref.nr.: **VERVE38** VERVE46 BT

streaming, FM radio, SD, USB 800W 1000W 400W 500W 12V 7.2Ah 45Hz 18KHz ...

lang:en **score:25** filesize: 756.55 K page_count: 26 document date: 2023-03-31

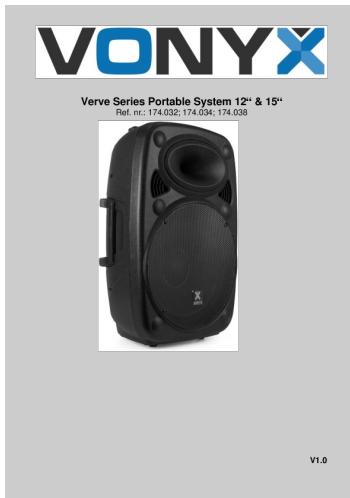

[\[pdf\]](#) User Manual Specifications Dimension Guide

Fisa tehnica pentru Boxa portabila 2 microfoane UHF 400W woofer 12inch jack 3 5 6 3mm RCA SD USB XLR Vonyx VERVE38 a2t ro Atu Tech VERVE46 Playback options BT streaming FM radio Output power Max 800W 1000W 500W Battery 12V 7.2Ah Frequency response Fisa VERVE38a2t source |||

Verve Series Portable System 12 15 Ref. nr.: 174.032; 174.034; 174.038 V1.0

TECHNICAL SPECIFIC ... type Input connections Output connections Power supply

Dimensions L x W x H Weight kg Ref.nr.: **VERVE38** VERVE46 BT streaming, FM radio, SD, USB 800W 1000W 400W 500W 12V 7.2Ah 45Hz 18KHz ...

lang:en score:22 filesize: 232.21 K page_count: 2 document date: 2024-12-04

V1.0



[\[pdf\]](#)

Bekijk de CE markering Party speaker Bluetooth Vonyx Verve38 800 Watt partybox op accu 2 draadloze bol original media s Nn66EJloNDON |||

...

lang:en score:14 filesize: 1.33 M page_count: 1 document date: 2023-06-28