

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [JALL](#) /

› [JALL Slim LED Digital Alarm Clock Instruction Manual \(Model CH08\)](#)

JALL CH08

JALL Slim LED Digital Alarm Clock Instruction Manual

Model: CH08

1. INTRODUCTION

Thank you for choosing the JALL Slim LED Digital Alarm Clock. This device combines a sleek design with practical features to enhance your daily routine. Its HD mirror surface, dual alarm functionality, adjustable brightness, and convenient USB charging ports make it an ideal addition to any bedroom or desk.



Image 1: Overview of the JALL Slim LED Digital Alarm Clock highlighting its super-slim design and key features like mirror surface, USB charging, brightness levels, alarm, 12/24H mode, and snooze function.

Key Features:

- Slim Design:** At only 0.4 inches thick, it offers a modern and minimalist aesthetic.
- HD Mirror Surface:** The 6.7-inch screen doubles as a high-definition mirror.
- Dual Alarms:** Set two independent alarms with customizable work modes (MON-SUN, MON-FRI, SAT-SUN) and 5 volume levels.
- Adjustable Brightness:** 4 levels of display brightness to suit day or night use.
- USB Charging Ports:** Two integrated USB ports for convenient device charging.
- Easy Setting:** User-friendly buttons and clear setup logic.

2. SETUP

Follow these steps for initial setup of your JALL Slim LED Digital Alarm Clock:

1. **Unpack:** Carefully remove the alarm clock and all accessories from the packaging.
2. **Remove Protective Film:** Locate and gently peel off the protective film from the mirror surface to reveal the clear display.



Image 2: A hand removing the protective film from the clock's mirror surface, revealing the digital display underneath.

3. **Power Connection:** Connect the provided USB cable to the Type-C power input port on the back of the clock and plug the other end into a power adapter (included) and then into a wall outlet. The display will light up.
4. **Positioning:** Place the clock on its stand on a stable surface, such as a nightstand or desk.

3. OPERATING INSTRUCTIONS

3.1. Time Setting

1. Press and hold the "SNOOZE/DIMMER/TIME SET" button for 3 seconds to enter time setting mode. The hour digits will flash.
2. Use the "+" and "-" buttons to adjust the hour.
3. Press "SNOOZE/DIMMER/TIME SET" again to confirm the hour and move to minute setting. The minute digits will flash.

4. Use the "+" and "-" buttons to adjust the minutes.
5. Press "SNOOZE/DIMMER/TIME SET" again to confirm the minutes and exit time setting mode.

3.2. Alarm Setting

The clock features two independent alarms (Alarm 1 and Alarm 2).

1. Press the "Alarm 1" or "Alarm 2" button to select the desired alarm. The alarm icon and hour digits will flash.
2. Use the "+" and "-" buttons to adjust the alarm hour.
3. Press the selected alarm button again to confirm the hour and move to minute setting. The minute digits will flash.
4. Use the "+" and "-" buttons to adjust the alarm minutes.
5. Press the selected alarm button again to confirm minutes and select the alarm work mode:
 - **1-7:** Alarm sounds every day (Monday to Sunday).
 - **1-5:** Alarm sounds on weekdays only (Monday to Friday).
 - **6-7:** Alarm sounds on weekends only (Saturday to Sunday).
6. Press the selected alarm button again to confirm the work mode and set the alarm volume (5 levels). Use "+" and "-" to adjust.
7. Press the selected alarm button one last time to confirm the volume and activate the alarm. The alarm icon will appear on the display.



Dual Alarms with Working Mode Setting

(Weekday, Weekend, 7-Day)

5 Levels of Alarm Volume

9-Minute Snooze



Image 3: The clock display showing two alarm icons, indicating that dual alarms can be set with various working modes and volume levels.

3.3. Display Brightness Adjustment

The clock offers 4 levels of display brightness:

1. Press the "SNOOZE/DIMMER/TIME SET" button (short press) to cycle through the 4 brightness levels (Bright, Natural, Dark, Off).
2. Select the desired brightness level for optimal viewing comfort.



4 Levels of Display Brightness

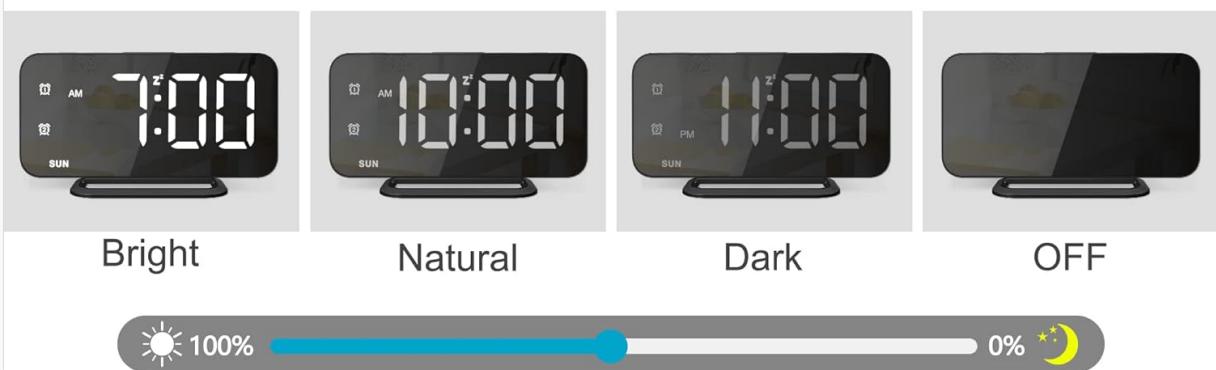


Image 4: Visual representation of the four adjustable brightness levels for the digital display, ranging from bright to completely off.

3.4. Snooze Function

When an alarm sounds, press the "SNOOZE/DIMMER/TIME SET" button (short press) to activate the snooze function. The alarm will pause for 9 minutes before sounding again.

3.5. USB Charging Ports

The clock is equipped with two USB charging ports on the back, allowing you to charge your mobile devices conveniently.

- Simply connect your device's USB charging cable to one of the ports.
- Ensure the alarm clock is powered on for the charging function to work.

Hidden Back USB Design

Makes it more
beautiful & attractive.



- Others -

So many cords connected
to the side.

Make it unattractive and
burdensome

Image 5: The hidden back USB design of the clock, providing two charging ports for external devices, ensuring a tidy appearance.

3.6. Mirror Function

The large HD screen of the alarm clock functions as a mirror, allowing you to groom your looks while checking the time.



Image 6: The clock's 7-inch mirror surface being used for makeup, demonstrating its dual functionality.

4. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the mirror surface and body of the clock. Avoid abrasive cleaners or solvents.
- **Storage:** If storing the clock for an extended period, disconnect it from power and keep it in a cool, dry place.
- **Avoid Water:** Keep the device away from water and high humidity.

5. TROUBLESHOOTING

- **Clock not turning on:** Ensure the USB power cable is securely connected to both the clock and a working power outlet.
- **Alarm not sounding:** Verify that the alarm is set correctly, activated (alarm icon visible), and the volume is not set to the lowest level.
- **Display too bright/dim:** Use the "SNOOZE/DIMMER/TIME SET" button to adjust the brightness level.
- **USB ports not charging:** Confirm the clock is powered on and the charging cable is properly

connected to your device and the clock's USB port.

6. SPECIFICATIONS

Feature	Detail
Brand	JALL
Model Number	CH08
Display Type	Digital LED
Product Dimensions	6.4"W x 6.7"H (approx. 0.4" thickness)
Power Source	Corded Electric (USB-C input)
Alarm Clock	Yes (Dual Alarms, 5 volume levels, 9-minute snooze)
Display Brightness	4 Levels Adjustable
USB Ports	2 USB Charging Ports
Material	Plastic, Acrylonitrile Butadiene Styrene
Item Weight	6.4 ounces

7. WARRANTY AND SUPPORT

This JALL Slim LED Digital Alarm Clock comes with a **1-year warranty** from the manufacturer, JALL. For any product inquiries, technical support, or warranty claims, please refer to the contact information provided in your product packaging or visit the official JALL Store on Amazon.

For additional support, you may also visit the [JALL Store on Amazon](#).