

[Manuals.plus](#) /

> [eeTao](#) /

> eeTao AC Power Cord Charger User Manual for WISHOLY X3 X5 Projectors

eeTao WISHOLY X3 X5 Power Cord

eeTao AC Power Cord Charger User Manual

For WISHOLY X3 and X5 Full HD Mini Portable Projectors

1. PRODUCT OVERVIEW

This document provides instructions for the eeTao AC Power Cord Charger, designed specifically for use with WISHOLY X3 and X5 Full HD Mini Portable Projectors. This power cord facilitates the electrical connection required to operate and charge your compatible projector.

The power cord is 4 feet (approximately 1.2 meters) in length and is engineered to provide a stable power supply within the 100V-240V range. It features built-in short circuit protection to ensure safe operation.

eeTao AC Power Cord Outlet Line Cable Plug Compatible with:



Image: The eeTao AC power cord, displaying its standard US 2-prong plug and the C7 (figure-8) connector for device connection.

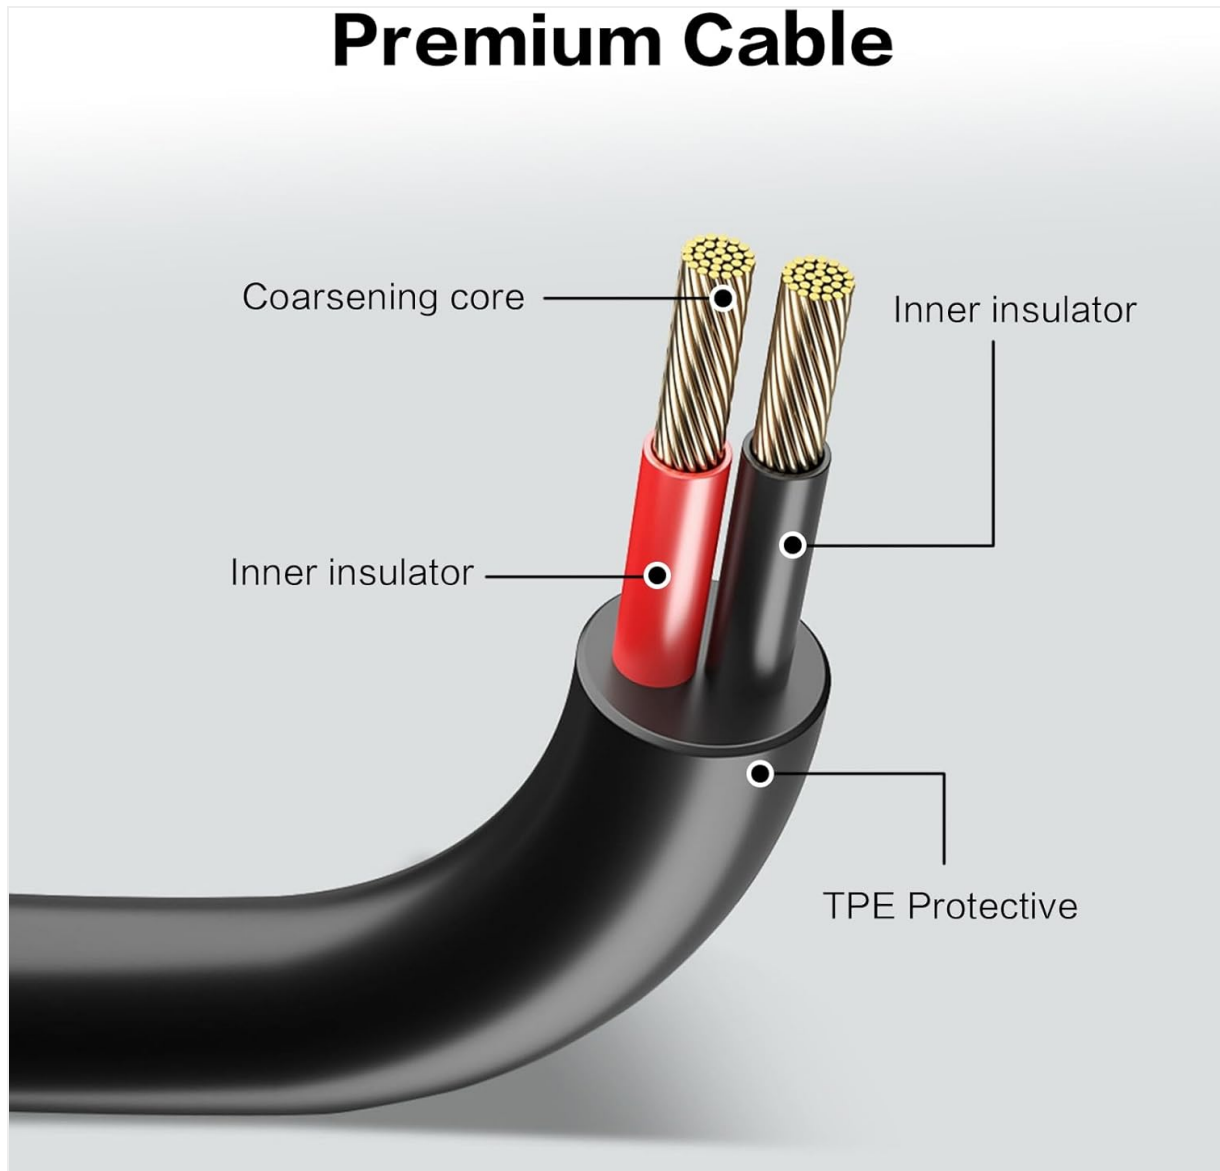


Image: A cross-section diagram of the power cable, detailing its internal components including the coarsening core, inner insulator, and TPE protective outer layer.

2. SETUP INSTRUCTIONS

1. **Identify Projector Power Port:** Locate the power input port on your WISHOLY X3 or X5 Full HD Mini Portable Projector. This port typically has a figure-8 shape.
2. **Connect to Projector:** Take the C7 (figure-8) connector end of the eeTao AC Power Cord and firmly insert it into the power input port of your projector. Ensure a snug fit.
3. **Connect to Power Outlet:** Insert the standard US 2-prong plug end of the eeTao AC Power Cord into a functional 100V-240V AC electrical wall outlet.



Image: Close-up of the power cord's connectors, illustrating the US 2-prong plug and the C7 connector for proper identification during setup.

Once both ends are securely connected, your projector should receive power and be ready for operation or charging.

3. OPERATING INSTRUCTIONS

The eeTao AC Power Cord Charger operates by providing a continuous electrical current to your WISHOLY X3 or X5 projector. No specific user interaction is required beyond proper connection.

- Ensure the power cord is securely connected to both the projector and the wall outlet.
- Verify that the wall outlet is active and supplying power.
- Once connected, the projector will draw power as needed for operation or battery charging.

4. MAINTENANCE

Proper maintenance extends the life of your power cord and ensures safe operation.

- **Cleaning:** Keep the power cord clean and free from dust and debris. Use a dry, soft cloth for cleaning. Do not use liquid cleaners directly on the cord or connectors.
- **Storage:** When not in use, coil the power cord loosely. Avoid tight coiling or sharp bends, which can damage the internal wires. Store in a cool, dry place away from direct sunlight and extreme temperatures.
- **Inspection:** Periodically inspect the entire length of the cord, including the connectors, for any signs of damage such as cuts, fraying, exposed wires, or bent prongs. If any damage is observed, discontinue use immediately and replace the cord.
- **Handling:** Always grasp the plug when disconnecting from an outlet or device; do not pull on the cable.

itself.



Image: The eeTao AC power cord neatly coiled and secured with a tie, illustrating recommended storage practice.

5. TROUBLESHOOTING

If you encounter issues with your eeTao AC Power Cord Charger, refer to the following troubleshooting steps:

- **No Power to Projector:**
 - Ensure both ends of the power cord are fully and securely plugged into the projector and the wall outlet.
 - Test the wall outlet with another known working device to confirm it is supplying power.
 - Inspect the power cord for any visible damage (e.g., cuts, kinks, frayed wires). If damaged, replace the cord.
- **Intermittent Power:**
 - Check all connections to ensure they are tight and not loose.
 - Ensure the power cord is not being bent sharply or pinched by furniture or other objects.
 - Avoid placing heavy objects on the power cord.

If the issue persists after following these steps, please contact customer support.

6. SPECIFICATIONS

Feature	Detail
Brand	eeTao
Model Number	WISHOLY X3 X5 Power Cord
Connector Gender	Male-to-Female
Voltage Compatibility	100V-240V AC
Cable Length	4 Feet (approx. 1.2 meters)
Item Weight	5 Ounces
Special Feature	Short Circuit Protection

7. WARRANTY INFORMATION

This eeTao AC Power Cord Charger is covered by a 30-day return policy. For specific terms and conditions regarding returns, replacements, or refunds, please refer to the policy provided by your retailer or point of purchase.

8. SUPPORT

For further assistance, technical support, or any questions not addressed in this manual, please contact eeTao customer service. Contact information can typically be found on the product packaging or through the retailer where the product was purchased.

When contacting support, please have your product model number (WISHOLY X3 X5 Power Cord) and purchase details readily available.