

Manuals.plus /
› BANTI /
› BANTI Electric Standing Desk User Manual

BANTI B-SDE-AIOBLZ

BANTI Electric Standing Desk with Drawers

Model: B-SDE-AIOBLZ

- Introduction
- Safety Information
- Setup
- Operation
- Maintenance
- Troubleshooting
- Specifications
- Warranty & Support

1. INTRODUCTION

This manual provides essential information for the safe and efficient use of your BANTI Electric Standing Desk with Drawers. This ergonomic workstation is designed to enhance your productivity and well-being by allowing seamless transitions between sitting and standing positions.

The desk features a 48-inch whole-piece glass desktop, height adjustability from 27.7 to 46.6 inches, and an integrated drawer with partitioned zones for organized storage. Its electric lift system operates quietly and includes an anti-collision mechanism for safety.



Figure 1: BANTI Electric Standing Desk in a typical setup, showcasing its design and integrated storage.

2. SAFETY INFORMATION

Please read all safety instructions carefully before assembly and use to prevent injury or damage to the product.

- **Weight Limit:** Do not exceed the maximum weight capacity of **176 lbs (80 kg)** on the desktop. Overloading can cause instability and damage.
- **Anchoring:** Ensure the desk is placed on a stable, level surface. If necessary, consider anchoring the desk to a wall to prevent tipping, especially in households with children or pets.
- **Height Adjustment:** Exercise caution when adjusting the desk height. Keep hands, feet, and other objects clear of moving parts to avoid pinching or crushing.
- **Anti-Collision System:** The desk is equipped with an anti-collision system. While this system helps prevent damage, always supervise desk movement and ensure no obstacles are in the path of the desktop.
- **Children and Pets:** Keep children and pets away from the desk during height adjustments. Do not allow them to play on or around the desk.

- **Power Cord:** Ensure the power cord is not pinched or damaged. Route cables safely to prevent tripping hazards.
- **Liquid Spills:** The glass desktop is easy to clean, but avoid excessive liquid spills, especially near electrical components.

Partitcal Doul-Zone Drawer

Organize your desktop in an organized way



Multi-function Control Panel

Reach the memory height with one click

Figure 2: Anti-collision technology in action, preventing bumps and scratches.

3. SETUP AND ASSEMBLY

The BANTI Electric Standing Desk is designed for quick and straightforward assembly. All necessary tools are included.

3.1 Unpacking

Carefully remove all components from the packaging. Verify that all parts listed in the packing list are present and undamaged. Keep packaging materials until assembly is complete in case of returns or exchanges.

3.2 Assembly Steps

1. **Install the Tabletop and Desk Frame:** Place the tabletop upside down on a soft, clean surface to prevent scratches. Attach the desk frame components to the tabletop using the provided screws and tools.
2. **Install Desk Feet:** Securely attach the desk feet to the bottom of the desk frame. Ensure they are firmly tightened for stability.
3. **Connect Power Cords:** Connect the motor cables to the control box and then plug the main power cord into a standard electrical outlet.
4. **Cable Management:** Use the included cable ties or management solutions to organize and secure all cables, preventing tangles and hazards.

10 Min Quick Installation

Package Includes Installation Instruction Installation Tool



Simple 1

Install the tabletop and the desk frame



Simple 2

Install desk feet



Simple 3

Connect power cords and done!



Figure 3: Visual guide for the 10-minute quick installation process.

Recommended Assembly Personnel: 2 people are recommended for assembly due to the size and weight of the components.

4. OPERATING INSTRUCTIONS

Your BANTI Electric Standing Desk features an intuitive control panel for easy height adjustment and memory functions.

Multi-function Control panel

Reach the memory height with one click

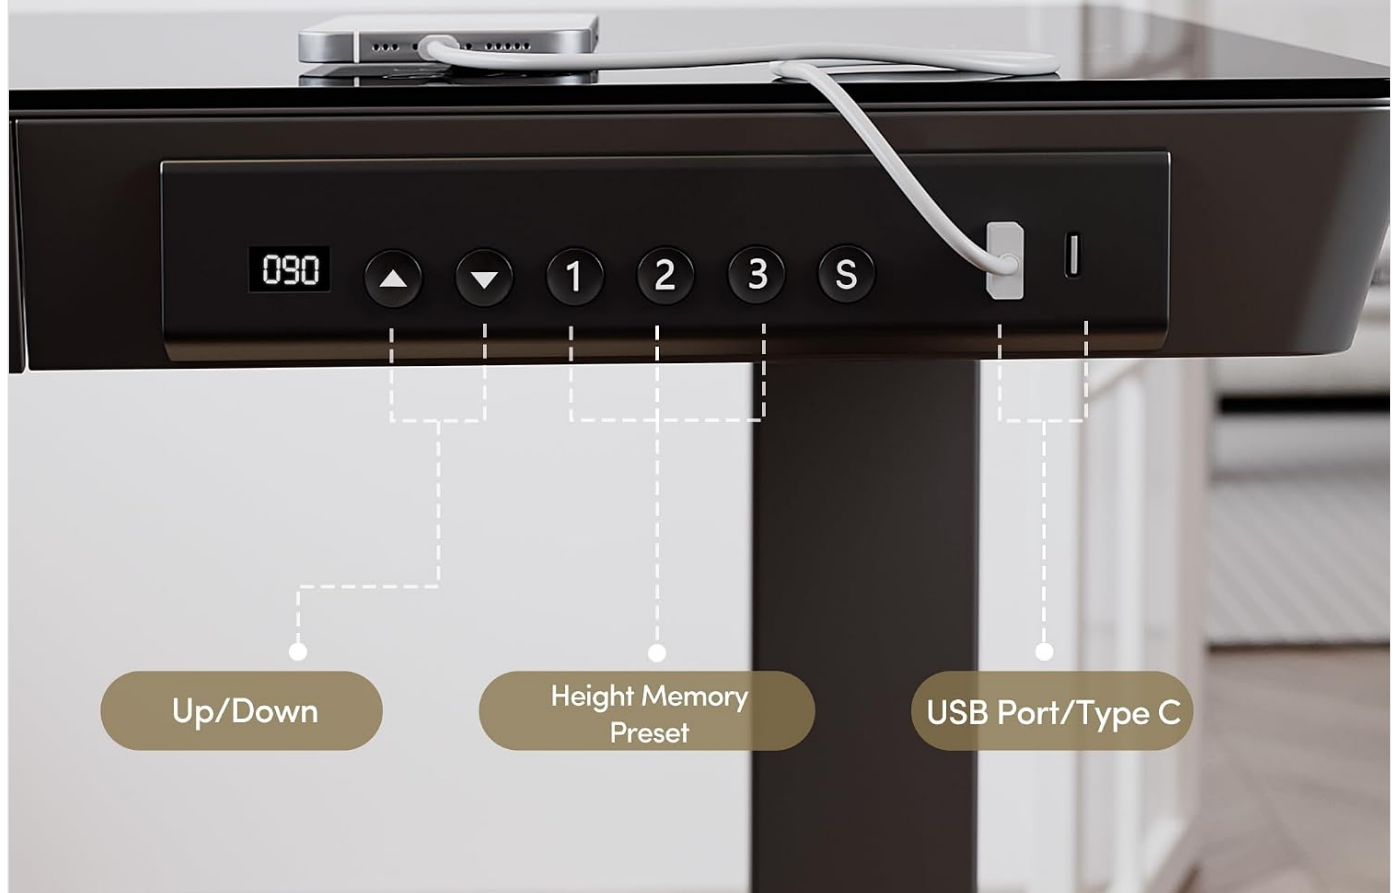


Figure 4: Multi-function Control Panel overview.

4.1 Height Adjustment

- **Raise Desk:** Press and hold the **Up Arrow** button (▲) to raise the desk to your desired standing height.
- **Lower Desk:** Press and hold the **Down Arrow** button (▼) to lower the desk to your desired sitting height.
- Release the button once the desired height is reached. The desk can adjust between 27.7 and 46.6 inches.

4.2 Memory Presets

The desk allows you to save up to three preferred height settings for quick recall.

1. **Set a Memory Position:** Adjust the desk to your desired height using the Up/Down buttons. Press the **"S"** (Set) button, then immediately press one of the numbered memory buttons (**1**, **2**, or **3**). The display will confirm the setting.
2. **Recall a Memory Position:** Simply press the corresponding numbered memory button (**1**, **2**, or **3**). The desk will automatically move to the saved height.

4.3 USB & Type-C Charging Ports

The control panel includes integrated USB and Type-C ports for convenient charging of your devices. Simply plug in your compatible device to begin charging.

4.4 Anti-Collision System

The desk is equipped with an anti-collision system that detects obstacles during height adjustment. If an obstacle is encountered, the desk will automatically stop and reverse slightly to prevent damage or injury. Always ensure the area around the desk is clear during operation.



Figure 5: Quiet operation of the BANTI Electric Standing Desk, less than 50 dB.

5. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your BANTI Electric Standing Desk.

5.1 Cleaning the Glass Desktop

The whole-piece glass desktop is designed for easy cleaning.

- Use a soft, damp cloth with a mild glass cleaner or water to wipe the surface.
- Avoid abrasive cleaners or scouring pads, which can scratch the glass.
- Immediately wipe up any spills to prevent stains or damage.
- The glass surface can also be used as a writing table with dry-erase markers. Clean thoroughly after use.



Figure 6: Features of the high-quality glass desktop: water-resistant, easy to clean, and suitable for writing.

5.2 General Care

- Regularly check all screws and connections to ensure they are tight. Retighten if necessary.
- Keep the desk away from direct sunlight and extreme temperatures to prevent material degradation.
- Avoid placing heavy or sharp objects directly on the desktop without protection to prevent scratches or cracks.

6. TROUBLESHOOTING

If you encounter any issues with your BANTI Electric Standing Desk, refer to the following common problems and solutions.

Problem	Possible Cause	Solution
Desk does not move or respond to control panel.	- Power cord disconnected. - Motor cable disconnected. - Overload protection activated.	- Check if the power cord is securely plugged into the wall outlet and the control box. - Ensure all motor cables are firmly connected to the control box. - Remove some weight from the desk. Wait 20 minutes for the motor to cool down, then try again.
Desk moves unevenly or makes unusual noises.	- Loose connections or screws. - Uneven weight distribution.	- Check and tighten all assembly screws, especially on the frame and feet. - Distribute items on the desktop evenly.
Anti-collision system triggers too frequently.	- Sensitivity setting too high (if adjustable, though not specified here). - Obstacles in the desk's path.	- Ensure the area above and below the desk is clear during movement. - If the issue persists, contact customer support for potential sensitivity adjustment or diagnostics.
Memory presets are not working.	Presets not correctly saved.	Re-save your desired memory positions following the instructions in Section 4.2.

If the problem persists after attempting these solutions, please contact BANTI customer support for further assistance.

7. PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	B-SDE-AIOBLZ
Brand	BANTI
Product Dimensions (D x W x H)	24"D x 48"W x 27.75"H (Minimum Height)
Adjustable Height Range	27.7 inches to 46.6 inches
Desktop Material	Whole-Piece Glass
Base Material	Alloy Steel
Color	Black
Maximum Weight Capacity	176 lbs (80 kg)
Noise Level	Less than 50 dB

Feature	Detail
Number of Drawers	1 (with partitioned zones)
Included Components	1 Partitioned Drawer, Charging USB & Type-C Ports, Assembly Tools
Special Features	Adjustable Height, Electric Lift, Ergonomic, Anti-Collision System, Memory Presets



Figure 7: Detailed desk dimensions.

BANTI All in One Standing Desk

height adjustment from
27.75"–45.47"



Figure 8: Load capacity and lifting durability of the BANTI Electric Standing Desk.

8. WARRANTY & SUPPORT

8.1 Warranty Information

The BANTI Electric Standing Desk comes with a **Limited Warranty**. Please refer to your purchase documentation or contact BANTI customer support for specific terms and conditions regarding warranty coverage. Optional protection plans may be available for extended coverage. Check with your retailer for details.

8.2 Customer Support

BANTI is committed to providing friendly technical support and assistance. If you have any questions regarding assembly, operation, maintenance, or troubleshooting that are not covered in this manual, please do not hesitate to contact us. For support, please visit the official BANTI store or contact their customer service through the platform where you purchased the product. You can also visit the [BANTI Store on Amazon](#) for more information and contact options.

© 2023 BANTI. All rights reserved.

BANTI Electric Standing Desk with Drawers - Model B-SDE-AIOBLZ

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CCLHXN9C>

More documents and user manuals: <https://manuals.plus/>