

EUKI J9

EUKI Wireless Video Doorbell Camera with Chime

Model: J9

PRODUCT OVERVIEW

The EUKI Wireless Video Doorbell Camera with Chime (Model J9) provides comprehensive home surveillance with advanced features. It offers two-way audio, voice changing capabilities, PIR motion detection, instant alerts, and is battery-powered for easy indoor/outdoor installation. It connects via 2.4G WiFi and boasts an IP66 weather resistance rating.



Image: The EUKI Wireless Video Doorbell Camera (left) and its accompanying indoor chime (right), packaged together.

WHAT'S IN THE Box

Upon unboxing your EUKI Video Doorbell Camera, you will find the following components:

- Video Doorbell
- Mounting Bracket
- Micro USB Charging Cable
- Quick Start Guide

- Double-sided Tapes (x3)
- Unlock Pin (x1)
- Screws Pack
- Warranty Card

1080P HD Video & IR Night Vision



Day



Night Vision

Image: All components included in the EUKI Video Doorbell package laid out on a surface.

SETUP GUIDE

Your browser does not support the video tag.

Video: A comprehensive tutorial demonstrating the initial setup steps for the EUKI Video Doorbell, including charging, resetting, and connecting to Wi-Fi.

1. Charging the Doorbell

Before initial use, ensure your doorbell is fully charged. The doorbell features a built-in battery designed for long-lasting performance (up to 90 days per charge).

1. Locate the Micro USB charging port on the doorbell.
2. Connect the included Micro USB cable to the doorbell and a compatible USB power adapter (not included).
3. Plug the power adapter into a wall outlet.
4. The indicator light will show red during charging and turn blue when fully charged.

Long Standby & Stable Connection



Work with
2.4GHz WiFi



90 Days From
1 charge

Image: A view of the EUKI Video Doorbell with its internal battery compartment visible, highlighting its battery-powered nature.

2. Resetting the Doorbell

If you need to reset the doorbell to its factory settings, follow these steps:

1. Press the doorbell button to activate the device.
2. Locate the reset button on the side or back of the doorbell.
3. Use the supplied unlock pin or a similar small tool to extended press the reset button for 3-5 seconds.

4. Wait for the doorbell indicator to flash red, which signifies a successful reset.

3. Connecting the Doorbell to Wi-Fi

The doorbell connects to your home network via 2.4G WiFi. Please note that 5G WiFi networks are not supported.

1. Ensure the doorbell has been successfully reset (indicator flashing red slowly, once per second).
2. Download and open the "CloudEdge" app on your smartphone.
3. In the app, click "Add Device" and select "Smart Doorbell" or "Battery Camera" (depending on app version).
4. Follow the on-screen prompts to confirm the device is powered on and close to your router.
5. Select your 2.4G Wi-Fi network and enter the correct Wi-Fi name and password.
6. The app will display a QR code. Use your doorbell camera to scan this QR code from a distance of 5-8 inches.
7. The doorbell will flash red quickly (twice per second) when it successfully scans the QR code.
8. Click "Next" on your phone. Wait for the doorbell to show a solid blue light, indicating successful connection.

4. Installation

The doorbell is designed for easy wire-free installation. You can choose between drilling or using adhesive.

- **Drill Installation:** Use the provided screws and mounting bracket to securely attach the doorbell to your desired indoor or outdoor location.
- **Adhesive Installation:** For surfaces where drilling is not preferred (e.g., apartments), use the strong 3M double-sided adhesives provided to mount the doorbell.
- Place the wireless chime in any room where you wish to be alerted of visitors.

PIR Motion Detection & Instant Alarm

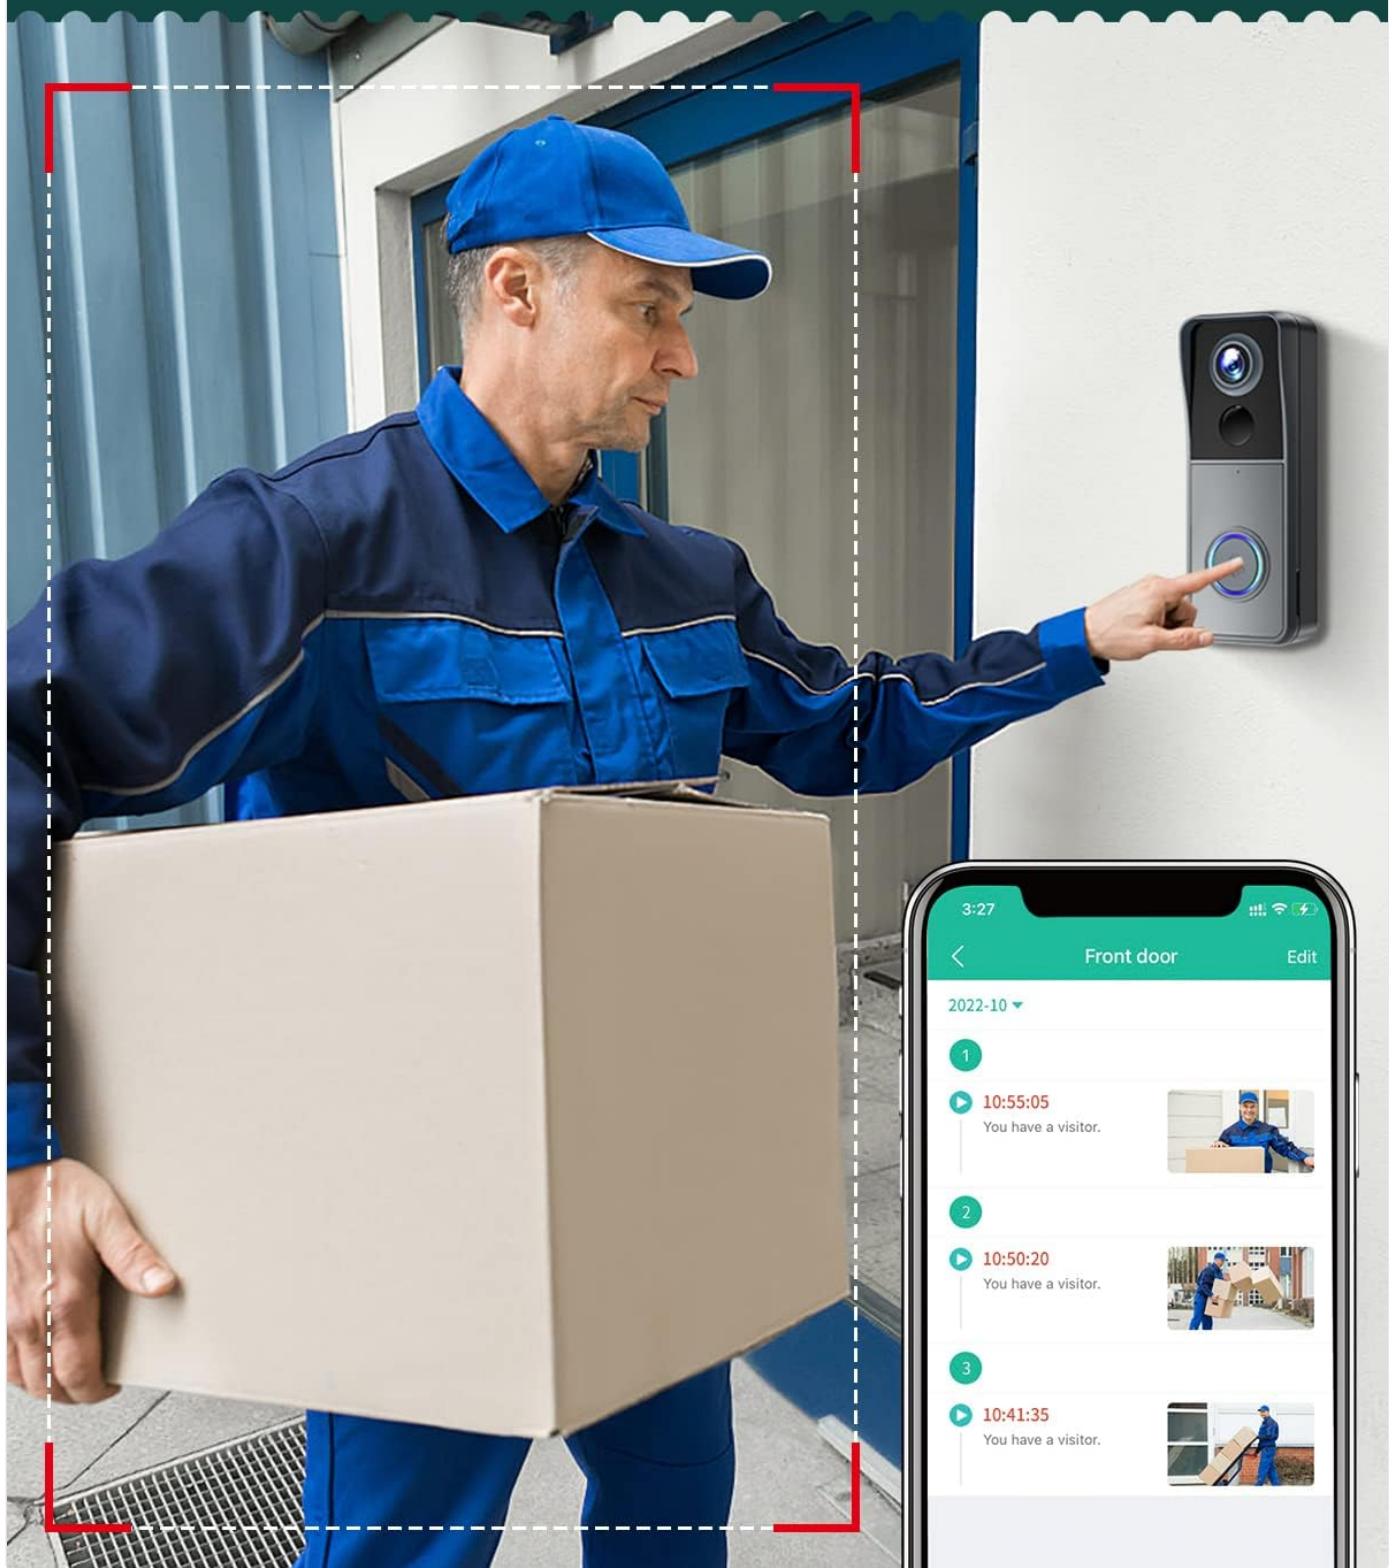


Image: The EUKI Video Doorbell mounted on a wall, illustrating its IP66 weather resistance against rain, snow, sun, temperature changes, and dust.

OPERATING INSTRUCTIONS

1. Two-way Audio & Voice Changer

Engage in real-time conversations with visitors at your door using the two-way audio intercom. The unique voice changer

feature allows you to disguise your voice for added privacy and security, making it ideal for individuals living alone or with children.

- Access the live view through the CloudEdge app to speak with visitors.
- Select from pre-recorded voice messages for quick replies.
- Activate the voice changer feature to modify your voice tone.

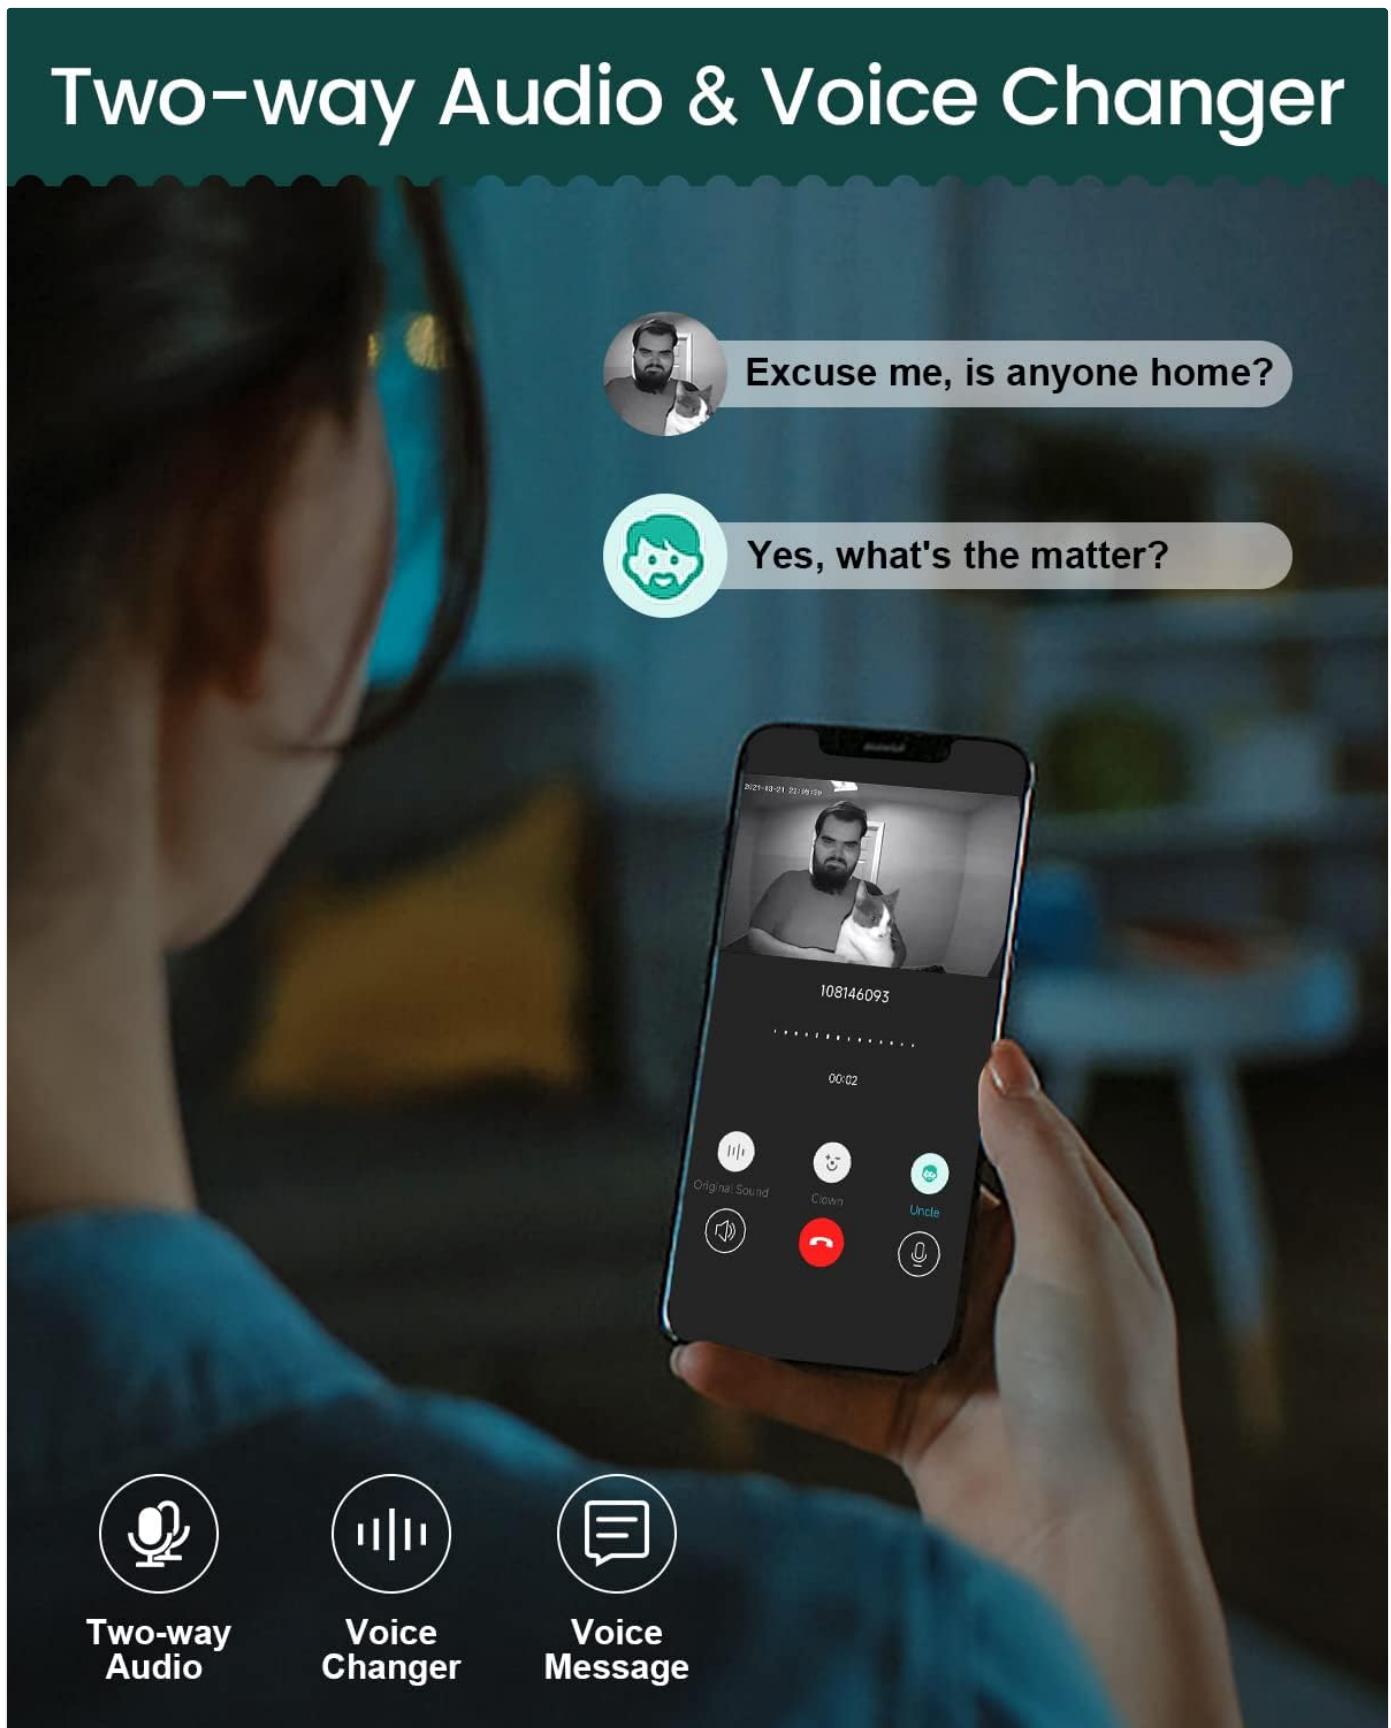


Image: A user interacting with the EUKI Video Doorbell via their smartphone, demonstrating the two-way audio and voice changer features.

2. Smart Human Detection & Motion Zones Customization

The doorbell's PIR motion detection system identifies human activity and sends instant alerts to your phone. Customize motion zones and sensitivity levels to minimize false alarms.

- Enable motion detection in the app to receive notifications when human activity is detected.
- Adjust sensitivity settings (five levels available) to suit your environment.
- Define specific motion zones to focus detection on critical areas and avoid frequent, unnecessary notifications.

IP65 Weather Resistance



Rain



Snow



Shine



Temp



Dust

Image: The EUKI Video Doorbell demonstrating its PIR motion detection capabilities, showing a person entering a defined motion detection zone.

3. Local/Cloud Storage & Night Vision

Record and review 1080P HD video with a 145° wide viewing angle. The doorbell supports both local and cloud storage options.

- **Local Storage:** Insert an SD card (up to 128GB, not included) for local video recording without monthly fees.
- **Cloud Storage:** A 7-day free trial is available for cloud storage, providing secure access to your recordings.
- **Infrared Night Vision:** The doorbell automatically switches to infrared night vision in low-light conditions, ensuring clear visibility 24/7.

No Monthly Fees & Optional storage

Cloud Storage,
with 7-day free trial

Local storage,
no monthly fee
(The SD Card is Not Included)



Image: A comparison showing the 1080P HD video quality of the EUKI Video Doorbell during the day and its clear infrared night vision at night.

MAINTENANCE

Battery Life

The EUKI Video Doorbell is designed for low power consumption, offering approximately 90 days of battery life per charge

under normal usage conditions. Battery life may vary based on activity levels, temperature, and Wi-Fi signal strength.

- Monitor battery status through the CloudEdge app.
- Recharge the doorbell using the provided Micro USB cable when the battery is low.

TROUBLESHOOTING

If you encounter issues with your EUKI Video Doorbell, consider the following common solutions:

- **No Power/Not Turning On:** Ensure the doorbell is fully charged. Connect it to a power source and check the charging indicator.
- **Cannot Connect to Wi-Fi:** Verify you are connecting to a 2.4Ghz Wi-Fi network. Double-check your Wi-Fi password. Ensure the doorbell is within range of your router. Try resetting the doorbell and attempting the connection process again.
- **Poor Video Quality:** Check your Wi-Fi signal strength in the app. Ensure the camera lens is clean and free from obstructions.
- **Motion Detection Issues:** Adjust the motion detection sensitivity settings in the app. Review and customize your motion detection zones.
- **No Alerts:** Ensure notifications are enabled for the CloudEdge app on your smartphone. Check your phone's network connection.

For further assistance, please refer to the "Support" section.

SPECIFICATIONS



Feature	Detail
Connectivity Protocol	Wi-Fi (2.4Ghz only)
Controller Type	Android, iOS (via CloudEdge app)
Mounting Type	Wall Mount (screws or adhesive)
Video Capture Resolution	1080p HD
Color	G-Grey
Viewing Angle	145 Degrees
Item Dimensions (L x W x H)	5.79 x 2.2 x 1.5 inches
Item Weight	14.9 ounces
International Protection Rating	IP66
Recommended Uses	Surveillance (Indoor, Outdoor)
Storage Options	Local (SD card up to 128GB, not included), Cloud (7-day free trial)

WARRANTY AND SUPPORT

EUKI is committed to providing professional service and support for its products. For any inquiries, technical assistance, or warranty claims, please contact our customer support team.

Refer to the Warranty Card included in your product packaging for specific warranty terms and conditions.

Related Documents

    	<p>EUKI X10PRO Dash Cam: User Guide and App Features</p> <p>Comprehensive guide to installing and using the EUKI X10PRO dash cam, including app features, camera settings, and connectivity.</p>	 <p>EUKI X3 Super Power Turbofan User Manual</p> <p>User manual for the EUKI X3 Super Power Turbofan, detailing product overview, list, instructions, parameters, maintenance, and safety precautions.</p>
---	--	---