

[Manuals.plus](#) /

> [iClever](#) /

> iClever Portable Keyboard, BK09 Foldable Bluetooth Keyboard with Number Pad for Travel and Business Trip, USB-C Rechargeable for Laptop, iPad, iPhone, Sync up to 3 Devices

iClever BK09

iClever BK09 Portable Foldable Bluetooth Keyboard User Manual

Model: BK09 | Brand: iClever

1. INTRODUCTION

The iClever BK09 Portable Keyboard is designed for efficiency and portability, featuring an 82-key layout with a dedicated number pad and 12 multimedia shortcuts. It utilizes Bluetooth 5.1 technology, allowing seamless switching between up to 3 devices and automatically recognizing different operating systems such as iPad, iPhone, tablets, laptops, and smartphones. Its tri-fold design makes it exceptionally lightweight and slim, with a folded size of 7.28" x 3.74" x 0.68", enabling easy transport in a pocket or backpack. The scissor-switch keys ensure a silent, smooth, and efficient laptop-like typing experience, complemented by a balance stand for stability. Powering the keyboard is a built-in 210 mAh battery, offering up to 360 days of standby time or 30 days of continuous use on a full 2-hour charge, ideal for business trips or vacations.

2. WHAT'S IN THE BOX

- BK09 Foldable Bluetooth Keyboard
- USB Cable
- Free Stand Holder
- User Manual

3. SETUP GUIDE

3.1 Initial Power On

Simply unfold the iClever BK09 keyboard. The power will automatically turn on when the keyboard is fully opened.



The iClever BK09 keyboard in its compact, folded form, ready for portability.

3.2 Bluetooth Pairing

1. Open the keyboard to power it on automatically.
2. Hold and press the **Fn + Q**, **Fn + W**, or **Fn + E** keys for approximately 5 seconds to enter pairing mode. The indicator light on the keyboard will begin blinking. Each of these key combinations corresponds to one of the three device profiles the keyboard can store.
3. On your device (e.g., tablet, smartphone, laptop), open the Bluetooth settings interface.
4. From the list of available Bluetooth devices, select "iClever BK09 Keyboard" to connect. Once connected, the indicator light will stop blinking.

For a visual guide on the pairing process, please watch the official video below:

Your browser does not support the video tag.

Official video demonstrating how to pair the iClever BK09 Bluetooth keyboard with a device.

4. OPERATING INSTRUCTIONS

4.1 Multi-Device Switching

The BK09 keyboard supports connection with up to three devices simultaneously. To switch between paired devices, simply press **Fn + Q** (for Device 1), **Fn + W** (for Device 2), or **Fn + E** (for Device 3).

Sync Up To 3 Devices



The iClever BK09 keyboard can seamlessly switch between up to three paired devices.


4.2 Key Functions and Layout

The keyboard features an 82-key layout, including a dedicated numeric keypad for enhanced productivity. It also includes 12 multimedia shortcuts accessible via the Fn key, allowing quick access to functions like volume control, media playback, and more. The scissor-switch keys provide a quiet and comfortable typing experience, similar to a laptop keyboard.

Compact Keyboard With Numeric Keypad



iClever

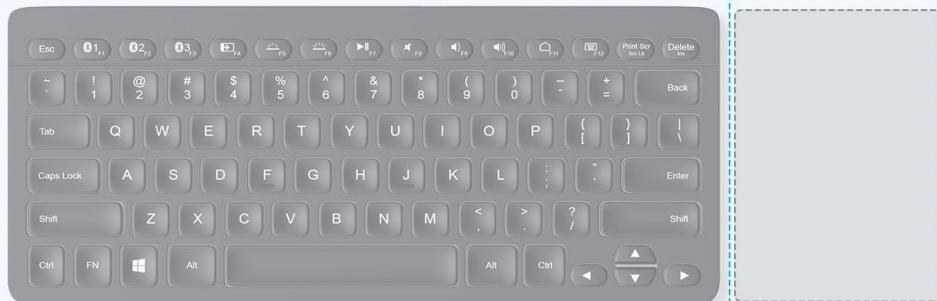

Others

The compact layout of the BK09 keyboard, featuring a full QWERTY section and a numeric keypad.

4.3 Broad Compatibility

The iClever BK09 automatically recognizes different operating systems, ensuring broad compatibility with Windows 10+, macOS 10.13+, iPad (10.2 / Pro / Air), iPhone 13+, and Android 8+ phones & tablets.

Broad Compatibility



The keyboard is compatible with a wide range of devices and operating systems.

4.4 Charging the Keyboard

The keyboard is equipped with a built-in 210 mAh rechargeable battery. Connect the provided USB-C cable to the keyboard's charging port and to a suitable USB power source. A full charge takes approximately 2 hours and provides up to 30 days of continuous use or 360 days of standby time.

USB-C Charge



 **210mAh** Lithium Battery

 **2 Hours** Charge

 **30 Days** Working

The keyboard features a convenient USB-C charging port.

5. MAINTENANCE

5.1 Cleaning

To clean the keyboard, use a soft, dry, lint-free cloth. For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid using harsh chemicals or abrasive materials that could damage the surface.

5.2 Storage

When not in use, fold the keyboard gently to protect the keys and internal components. Store it in a dry place away from extreme temperatures and direct sunlight. While durable, the keyboard is not spill-proof, so avoid exposure to liquids.

6. TROUBLESHOOTING

If you encounter issues with your iClever BK09 keyboard, please consider the following common points:

- **Not Pairing:** Ensure the keyboard is in pairing mode (blinking indicator light) and your device's Bluetooth is enabled and discoverable. Try restarting both the keyboard (by folding and unfolding) and your device.
- **Keys Not Responding:** Check the battery level. If low, charge the keyboard. Ensure it is properly connected to your device.
- **Accidental Key Presses:** The 15mm key pitch is smaller than standard laptop keys. Adjusting to the layout may take some time. Be mindful of the Num Lock key, as it can change the function of the numeric pad keys.
- **No Wired Mode:** Please note that the BK09 is Bluetooth-only and does not support a wired connection via USB.

For more detailed troubleshooting steps, please refer to the official [Troubleshooting Guide \(PDF\)](#).

7. SPECIFICATIONS

Feature	Detail
Product Dimensions (Unfolded)	12.87"L x 3.61"W x 0.46"H
Product Dimensions (Folded)	7.28"L x 3.74"W x 0.68"H
Item Weight	7.4 ounces (0.46 lbs)
Number of Keys	82
Connectivity Technology	Bluetooth 5.0 (wireless only)
Battery Capacity	210 mAh
Charging Port	USB-C
Manufacturer	iClever
Compatible Devices	Windows 10+, macOS 10.13+, iPad (10.2 / Pro / Air), iPhone 13+, Android 8+ phones & tablets
Color	Grey Black

8. WARRANTY AND SUPPORT

For detailed warranty information and customer support, please refer to the official [User Manual](#)

(PDF) provided by iClever. You can also visit the iClever official website for further assistance and product registration.