

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [SANSUI](#) /

› [SANSUI 15.6 Inch Portable Monitor ES-P156T1F User Manual](#)

SANSUI ES-P156T1F

SANSUI 15.6 Inch Portable Monitor ES-P156T1F User Manual

Model: ES-P156T1F

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your SANSUI 15.6 Inch Portable Monitor. Please read this manual thoroughly before using the product to ensure proper functionality and to prevent damage.



Image: The SANSUI 15.6 Inch Portable Monitor, showcasing its sleek design and vibrant display.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your product package. If any items are missing or damaged, please contact SANSUI customer support.

- SANSUI 15.6 Inch Portable Monitor with PU Leather Cover
- HDMI to Mini HDMI Cable (1.2m)
- Type-C to Type-C Cable (30V5A, 1m)
- Quick Start Guide (QSG Card)
- User Manual (this document)
- Warranty Card

Play with Big View



Image: All included accessories laid out next to the portable monitor.

Unboxing Video

Your browser does not support the video tag.

Video: An unboxing demonstration of the SANSUI 15.6 Inch Portable Monitor, showing how to unpack the device and its accessories.

3. PRODUCT FEATURES

- Display:** 15.6-inch IPS panel with FHD 1920x1080 resolution.
- Visual Quality:** 1200:1 high contrast ratio and 250 nits brightness for clear images.
- Viewing Angle:** 178° wide viewing angle.
- Eye Comfort:** Features low blue light and flicker-free technology to reduce eye strain.
- Design:** Ultra-thin (0.43 inches) and lightweight (2.1 lbs without cover) for portability.
- Protective Cover:** Includes a PU leather stand cover that offers 24°/37° tilt angles.
- Audio:** Built-in dual speakers and a 3.5mm audio jack.
- Connectivity:** Two USB Type-C ports and one Mini HDMI port.

15.6" FHD IPS Portable Monitor



1920×1080
Resolution



1200:1
Contrast Ratio



250Nits
Brightness



Low
Blue Light



178°
Wide Viewing



75×75mm
VESA Mount Support

Image: Visual representation of the monitor's display specifications and features.

Ensure Optimal Eye Comfort

Low Blue Light On vs Off



Low Blue Light



Flicker-Free



Anti-Glare

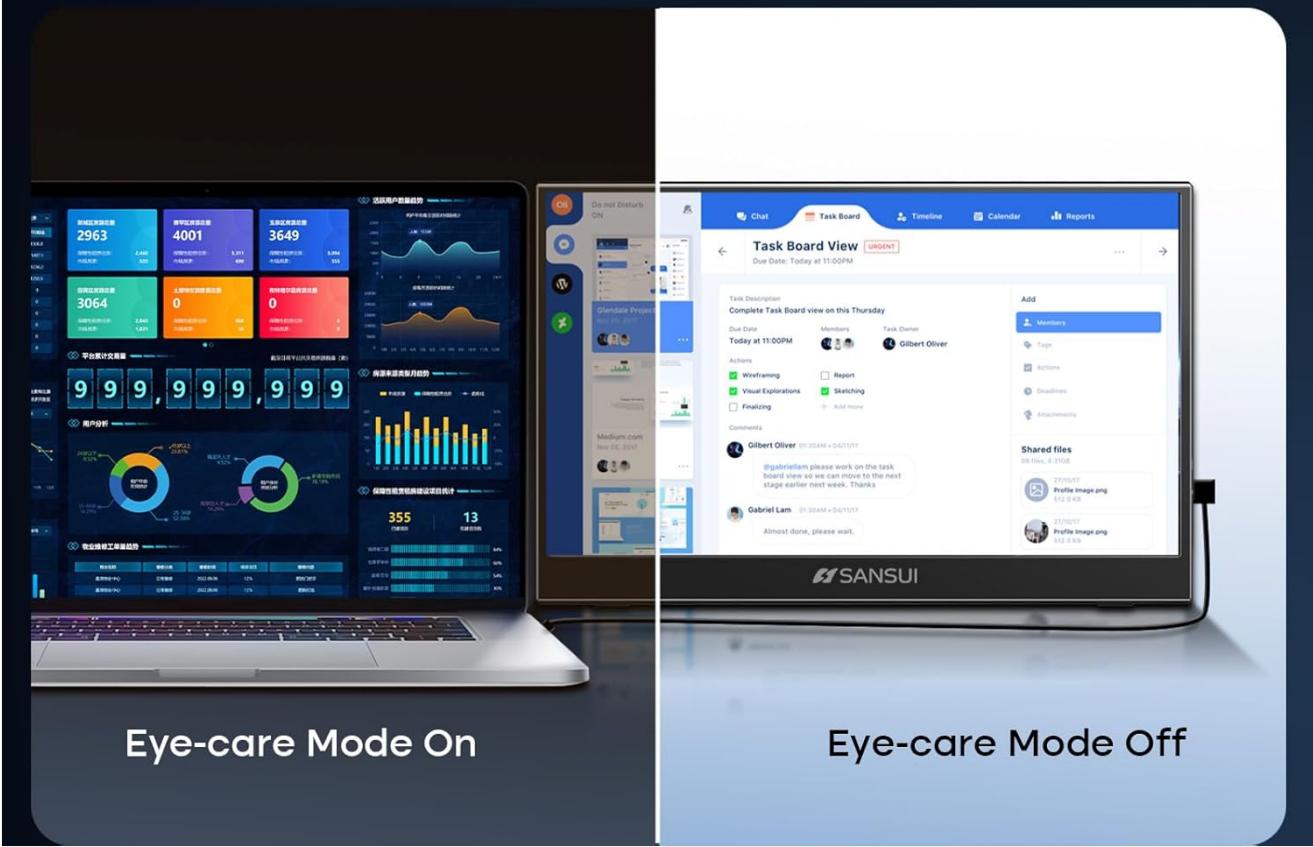


Image: Illustration of the monitor's eye-care features, including low blue light and flicker-free technology.

PU Leather Case Easily Stand



Waterproof



Scratch-Proof



Anti-slip



Image: The monitor's PU leather cover functioning as a stand, illustrating its adjustable angles and protective qualities.

4. PHYSICAL OVERVIEW

Familiarize yourself with the ports and controls on your SANSUI portable monitor.

Easy Control & Wide Compatibility

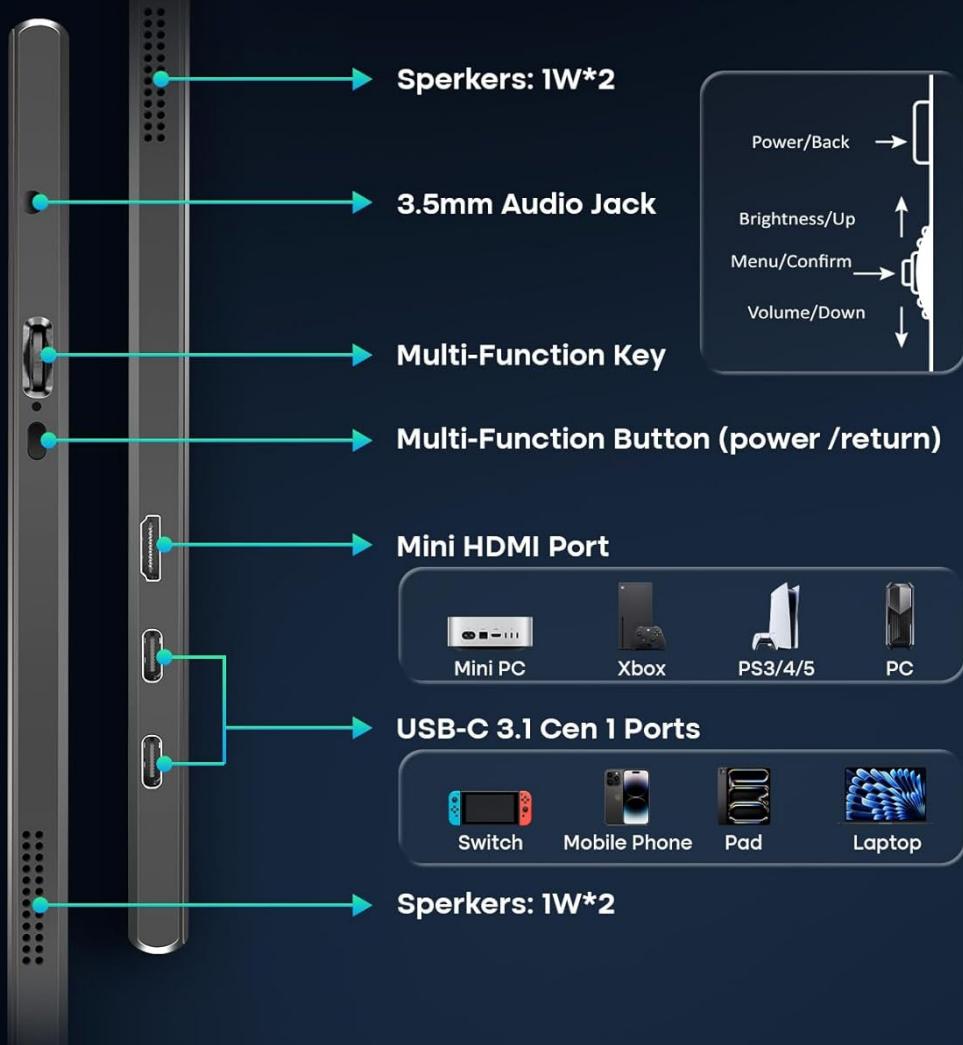


Image: A detailed diagram showing the location and function of all ports and control buttons on the monitor.

Ports and Buttons:

- USB Type-C Ports (x2)**: For power, video, and data transmission (requires full-function USB-C port on host device).
- Mini HDMI Port (x1)**: For video input from devices like laptops, PCs, gaming consoles.
- 3.5mm Audio Jack**: For connecting external headphones or speakers.
- Multi-Function Key**: Controls power, menu navigation, brightness, and volume.
- Built-in Speakers**: Dual 1W speakers for audio output.

5. SETUP AND CONNECTION

The SANSUI portable monitor offers flexible connection options for various devices.

Power Requirements:

- The monitor can be powered directly by a compatible full-function USB-C port on your device (e.g., laptop, phone).

- For independent power supply or when using the Mini HDMI connection, a dedicated PD adapter (45W or higher, not included) and a USB-C cable supporting 45W+ power transmission are required.

Connection Methods:

1. USB Type-C Connection (Single Cable Solution):

- Connect one end of the provided Type-C to Type-C cable to a full-function USB-C port on your device (which supports DisplayPort Alt Mode).
- Connect the other end to one of the USB Type-C ports on the monitor.
- This connection provides power, video, and data through a single cable. Ensure your device's USB-C port supports video output.

2. HDMI Connection (Video Only):

- Connect one end of the provided HDMI to Mini HDMI cable to your device's HDMI port.
- Connect the Mini HDMI end to the Mini HDMI port on the monitor.
- When using HDMI, external power is required for the monitor via a USB Type-C port and a PD adapter (not included).

6. OPERATING THE MONITOR

On-Screen Display (OSD) Menu:

Use the Multi-Function Key to access and navigate the OSD menu for display settings, audio adjustments, and other configurations.

- Press the Multi-Function Key to open the OSD menu.
- Move the key up/down to navigate through menu options.
- Press the key to confirm a selection.
- Press the Multi-Function Button (power/return) to go back or exit the menu.

Display Modes:

The monitor supports various display modes depending on your connected device and operating system settings.

- **Mirror Mode:** Duplicates your primary screen's content.
- **Extended Mode:** Extends your desktop, allowing for multitasking across multiple screens.
- **Second Screen Mode:** Uses the portable monitor as the sole display.

High-Efficiency for Work & Play



Mirror Mode
Share your screen



Extended Mode
Good for multitasking



Second Screen Mode
Boarder your view



Image: Examples of the monitor used in Mirror, Extended, and Second Screen modes with various devices.

7. MAINTENANCE

- Cleaning the Screen:** Use a soft, lint-free cloth slightly dampened with water or a screen cleaner. Avoid harsh chemicals.
- Cleaning the Body:** Wipe with a soft, dry cloth.
- Storage:** When not in use, store the monitor in its protective PU leather cover to prevent scratches and damage.
- Avoid Extreme Conditions:** Do not expose the monitor to extreme temperatures, humidity, or direct sunlight.

8. TROUBLESHOOTING

If you encounter issues with your monitor, refer to the following common problems and solutions:

- No Signal / Black Screen:**
 - Ensure all cables (USB-C, HDMI, power) are securely connected.

- Verify that your device's USB-C port supports video output (DisplayPort Alt Mode).
- If using HDMI, ensure the monitor is receiving adequate power from a separate USB-C power source.
- Try connecting to a different port on your device or a different device to isolate the issue.
- Check your device's display settings to ensure the external monitor is detected and enabled.

- No Power:**

- Ensure the USB-C power cable is connected to a power source (either your device's full-function USB-C port or a 45W+ PD adapter).
- Try a different USB-C cable or power adapter.

- Image Flickering / Unstable Display:**

- Ensure the cables are not damaged and are properly connected.
- Reduce the display resolution or refresh rate on your connected device.
- Ensure the monitor is receiving stable power.

- No Audio from Speakers:**

- Check the volume settings on both the monitor (via OSD menu) and your connected device.
- Ensure the correct audio output device is selected on your computer/device.
- If using HDMI, ensure your device is sending audio over HDMI.

9. SPECIFICATIONS

Model Number	ES-P156T1F
Screen Size	15.6 Inches
Panel Type	IPS
Resolution	FHD 1920x1080
Aspect Ratio	16:9
Brightness	250 nits (candela per square meter)
Contrast Ratio	1200:1
Viewing Angle	178°
Screen Surface	Matte
Connectivity	2x USB Type-C, 1x Mini HDMI, 1x 3.5mm Audio Jack
Speakers	Dual 1W Built-in Speakers
Product Dimensions (with cover)	14.33 x 9.21 x 0.59 inches
Product Dimensions (without cover)	14.2 x 9.1 x 0.43 inches
Item Weight (with cover)	2.99 pounds
Item Weight (without cover)	2.1 pounds (approx.)

On-the-Go Design



0.64kg

0.4"

0.2"

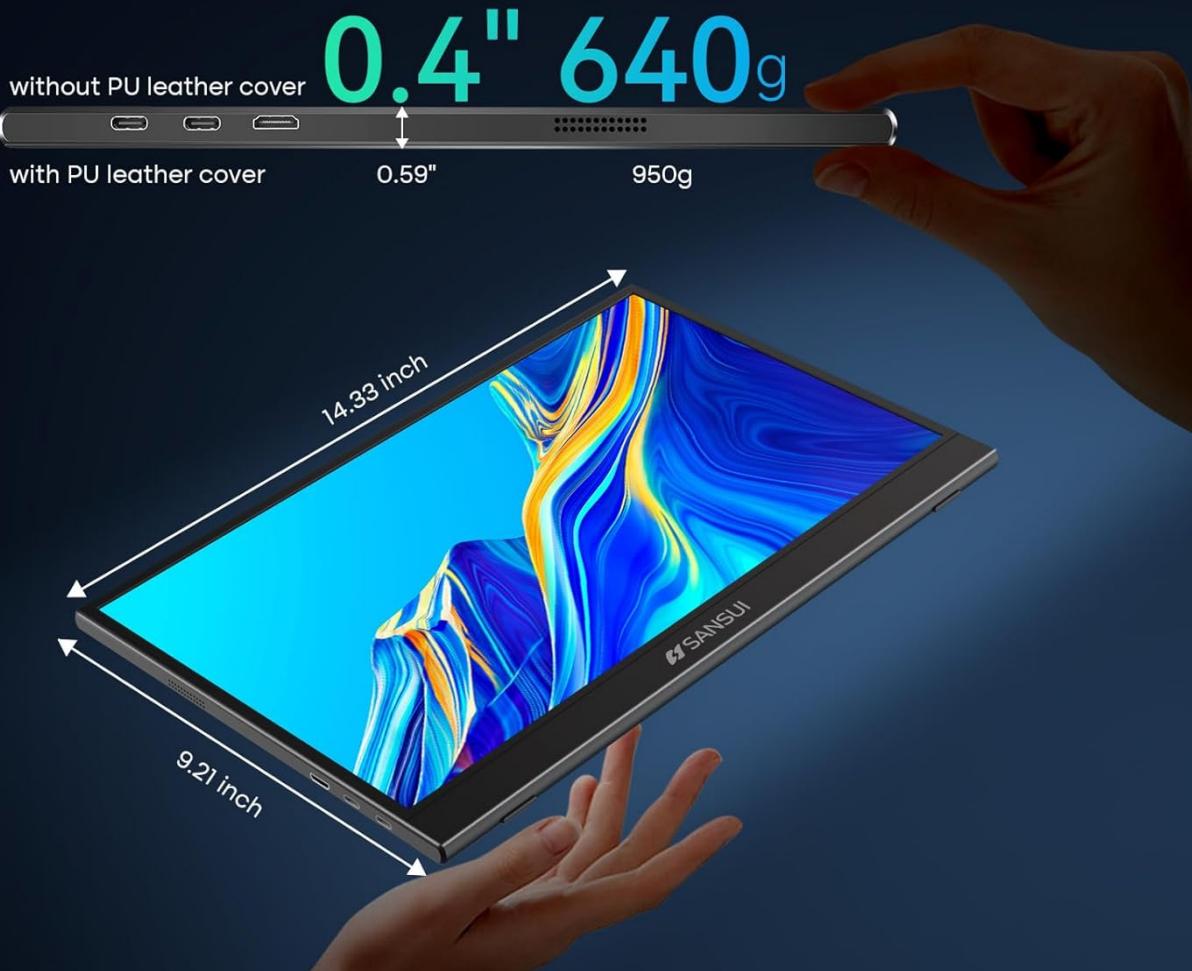


Image: Detailed dimensions and weight specifications of the portable monitor.

10. WARRANTY AND SUPPORT

Your SANSUI portable monitor comes with a manufacturer's warranty. Please refer to the included Warranty Card for specific terms and conditions, including warranty period and coverage details.

For technical support, troubleshooting assistance, or warranty claims, please contact SANSUI customer service. Contact information can typically be found on the Warranty Card, Quick Start Guide, or the official SANSUI website.