

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [EPICKA](#) /
- › [EPICKA 35W Universal Travel Adapter Instruction Manual](#)

EPICKA TA-205

EPICKA 35W Universal Travel Adapter Instruction Manual

Model: TA-205

INTRODUCTION

This manual provides detailed instructions for the safe and efficient use of your EPICKA 35W Universal Travel Adapter (Model: TA-205). Please read this manual thoroughly before use and retain it for future reference.



Image: Front view of the EPICKA 35W Universal Travel Adapter, showcasing its compact design, USB-A and USB-C ports, and the universal AC outlet.

PRODUCT OVERVIEW

The EPICKA TA-205 is a versatile 7-in-1 international power adapter designed for global travelers. It features multiple charging options and broad compatibility with various international outlets.

Key Features:

- **Worldwide Compatibility:** Equipped with 4 different plug types (Type C, G, I, A) for use in over 200 countries and regions.
- **Multi-Port Charging:** Includes 2 AC outlets, 2 USB-C ports (one with PD3.0 for 35W fast charging), and 3 USB-A ports.
- **Compact Design:** Small and portable, ideal for travel.
- **Safety Features:** Built-in 10A fuse, safety shutters, and a separate plug lock system.

ALL IN ONE

Charge 7 Devices at Once, Unique Dual AC Outlet Design



Universal Socket



US Socket



3 USB-A



2 USB-C



Image: The EPICKA Universal Travel Adapter connected to a wall outlet, simultaneously charging a laptop, tablet, and smartphone, demonstrating its 7-in-1 capability.

SETUP AND PLUG SELECTION

The adapter features retractable pins for different regions. To select the correct plug type:

1. Identify the required plug type for your destination country. Refer to the table below or the markings on the adapter.
2. Locate the corresponding slider on the side of the adapter.
3. Slide the button to extend the appropriate pins. Ensure the pins are fully extended and locked into place before use.
4. To retract, slide the button back.

Plug Type Guide:

- **Type C (EU/KR):** Most of Europe (France, Germany, Italy, Spain, Iceland, Greece), Korea.
- **Type G (UK):** UK, Ireland, Hong Kong, Malaysia, Singapore.
- **Type I (AUS/CN):** China, Australia, New Zealand, Argentina.
- **Type A (US/JP):** USA, Mexico, Canada, Japan.

Important Note: This adapter does NOT work with Type D (India) or Type M (South Africa) sockets.

PUSH THE PIN, POWER WORLDWIDE

Works in 200+ Countries & Regions



Image: Close-up views of the EPICKA Universal Travel Adapter demonstrating how to extend and retract the different regional plug pins (EU/KR, UK, US/JP, AUS/CN).

UNIVERSAL AC OUTLET

Accept plugs from 200+ countries & regions



NOTE: This is NOT a Voltage Converter



Image: Visual guide illustrating the compatibility of the EPICKA adapter with different AC outlet types (Type B, C/J/L/N, A, G, I, E/F) and a clear warning that it is not a voltage converter, showing incompatible high-power devices.

OPERATING INSTRUCTIONS

Once the correct plug type is extended, insert the adapter into the wall socket. You can then connect your devices.

Connecting Devices:

- **AC Outlets:** The adapter features two AC outlets. One is a standard US 2-prong outlet, and the other is a versatile outlet accepting US, EU, UK, AU, and China plugs. Connect your AC-powered devices here.
- **USB Ports:** Use the 3 USB-A ports and 2 USB-C ports to charge your USB-powered devices such as smartphones, tablets, smartwatches, power banks, and cameras.

- **Fast Charging:** One of the USB-C ports supports PD3.0 and offers up to 35W fast charging. This is ideal for tablets, USB-powered laptops, and fast-charge compatible smartphones.



Image: The EPICKA adapter connected to a smartphone and tablet, illustrating its 35W fast charging capability for quick power delivery.

SAFETY INFORMATION AND IMPORTANT NOTES

WARNING: This adapter does NOT convert voltage. Ensure your electronic devices are dual voltage compatible (input spec "100-240V, 50/60Hz") before connecting them. Using non-dual voltage devices may cause damage to the device or the adapter.

- **High-Power Appliances:** Appliances over 2000W (e.g., many hair dryers, irons) are generally not recommended for use with this adapter, even if they support dual voltage. The built-in 10A fuse is

designed to pop to prevent damage in such cases.

- **Fuse Protection:** The adapter has a built-in 10A overload protection fuse. If the adapter stops working, the fuse may have blown. A spare fuse is included.
- **Safety Shutters:** Integrated safety shutters prevent accidental insertion of foreign objects into the outlets, enhancing user safety.
- **Cruise Ship Use:** This adapter does not have surge protection and can be safely used on cruise ships.
- **Certifications:** The product is RoHS, CE, and FCC certified, ensuring compliance with international safety standards.

SAFETY DESIGN

10A Overload Protection Fuse

A Spare Fuse



Safety Shutter

Avoid accidental insertion of foreign objects like infant's finger

Image: Detailed view of the EPICKA adapter highlighting its safety features, including the 10A overload protection fuse and the safety shutters designed to prevent accidental contact.

MAINTENANCE

- Keep the adapter clean and dry. Avoid exposure to moisture or extreme temperatures.
- Do not attempt to disassemble or modify the adapter.
- If the fuse blows, replace it with an EPICKA 10A replacement fuse. Using incorrect fuse specifications may lead to product incompatibility or damage.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Adapter not powering devices.	Blown fuse, incorrect plug selection, device not dual voltage.	Check and replace fuse if necessary. Ensure correct plug is extended and locked. Verify device voltage compatibility.
Slow charging.	Multiple devices connected, device not fast-charge compatible.	Disconnect some devices. Use the 35W USB-C port for fast-charge compatible devices.
Adapter feels warm.	Normal operation, especially with multiple devices.	This is normal. If it becomes excessively hot or emits smoke/smell, disconnect immediately.

SPECIFICATIONS

Feature	Detail
Model Number	TA-205
Dimensions (L x W x H)	2.56 x 1.97 x 2.36 inches
Item Weight	6.1 ounces
Wattage	35 watts (Max)
Input Voltage	100-240V AC, 50/60Hz (Device must be dual voltage)
USB-C Output	PD3.0 (up to 35W)
USB-A Output	Standard USB-A
Fuse Rating	10A
Certifications	RoHS, CE, FCC

COMPACT SIZE

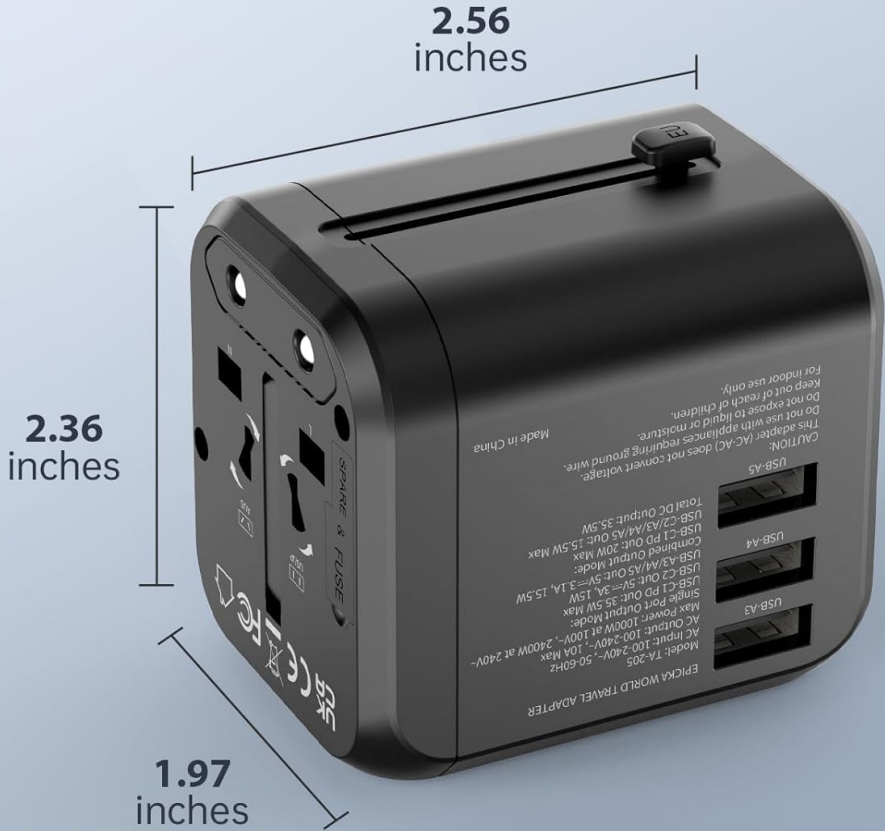


Image: The EPICKA adapter with its compact dimensions clearly marked, showing its length, width, and height.

WARRANTY AND SUPPORT

EPICKA offers a 2-year limited warranty for this product. For warranty claims or technical support, please contact EPICKA customer service through their official channels. You can find replacement 10A fuses by searching for "Epicka Replacement Fuses" on Amazon.

For more information, visit the official EPICKA store: [EPICKA Store on Amazon](#)