

XODO VD2

XODO VD2 Wireless Video Doorbell User Manual

Model: VD2

1. INTRODUCTION

Thank you for choosing the XODO VD2 Wireless Video Doorbell. This device provides enhanced home security and convenience with its advanced features, including high-definition video, motion detection, and two-way communication. Please read this manual carefully to ensure proper installation, operation, and maintenance of your new video doorbell.



Image 1: XODO VD2 Wireless Video Doorbell, accompanying chime, and a smartphone displaying a live view of a delivery person.

2. PRODUCT FEATURES

- **2K FHD Camera & Night Vision:** Upgraded 2K resolution for crystal-clear images and video. Built-in lights automatically switch to night vision mode for clear visibility in darkness.
- **PIR Motion Detection & Two-Way Audio:** Integrated PIR motion sensor sends instant alerts upon motion detection. Microphone and speaker enable real-time two-way audio communication with visitors.
- **IP65 Weatherproof & 2.4G Wi-Fi:** Designed to withstand extreme weather conditions (-4°F to 122°F). Features a built-in 4800mAh rechargeable battery for up to 180 days of standby time. Stable 2.4GHz Wi-Fi connection ensures reliable operation.
- **Free Local Storage & Family Sharing:** Supports up to 128GB Micro SD storage (not included) and offers a 7-day trial of the Subscription Plan (Cloud storage with 30-day free trial). Account sharing is available for up to 15 online users and 20 account users.
- **100% Wire-Free & Easy Installation:** Simple setup in under 5 minutes due to its battery-powered design. Mounts easily with provided screws.

3. PACKAGE CONTENTS

Please verify that all items are present in your package:

- XODO VD2 Wireless Video Doorbell
- Wireless Chime (requires 3 AAA Batteries, not included)
- Mounting Bracket
- Screw Assembly (screws and wall anchors)
- USB Cable (for charging)
- Unlock Pin
- User Manual (this document)



Image 2: Detailed diagram showing the doorbell's micro USB port, reset button, MicroSD card port, lens, IR LED, MIC, doorbell button, indicator light, and included accessories like USB cable, screw assembly, and unlock pin.

4. SETUP GUIDE

4.1. Charging the Doorbell

Before first use, fully charge the doorbell using the provided USB cable. The indicator light will show charging status and turn off when fully charged.

4.2. Installing the MicroSD Card (Optional)

Insert a MicroSD card (up to 128GB, not included) into the designated slot for local video storage. Ensure the card is inserted correctly.

4.3. App Download and Setup

1. Download the **Xodo App** from the Google Play Store or Apple App Store.
2. Register for a new account or log in if you already have one.
3. Follow the in-app instructions to add your XODO VD2 doorbell. This typically involves scanning a QR code on the doorbell or manually entering its ID.
4. Ensure your mobile device is connected to a 2.4GHz Wi-Fi network during the pairing process.

4.4. Chime Setup

Insert 3 AAA batteries (not included) into the wireless chime. The chime will automatically pair with the doorbell once both are powered on and within range. You can place the chime in various locations within your home, such as the living room, kitchen, or bedroom.

XODO Smart Wi-Fi Video Doorbell

Standby Time Up to 180 days



Image 3: The XODO VD2 doorbell mounted on a front door, illustrating its wireless capability and long standby time of up to 180 days.



Wireless Chime

Place Chime anytime, anywhere

Support AAA battery doorbell chime can be placed anywhere, like: Living room, dining room, bedroom, Ideal home life.

Image 4: Examples of where the wireless chime can be placed, such as on a coffee table, bookshelf, or dining table, highlighting its portability.

4.5. Physical Installation

1. Choose a suitable location near your front door, ensuring good Wi-Fi signal strength.
2. Mount the bracket to the wall using the provided screws and wall anchors.
3. Slide the doorbell onto the mounted bracket until it clicks securely into place.



Image 5: Visual representation of the doorbell easily sliding onto its mounting bracket for quick setup.


5. OPERATING INSTRUCTIONS

5.1. Live View and Two-Way Audio

Open the Xodo App on your smartphone to access the live video feed from your doorbell. Tap the microphone icon to initiate two-way audio communication with visitors at your door.

TWO WAY AUDIO

Talk and see Who's ringing the doorbell

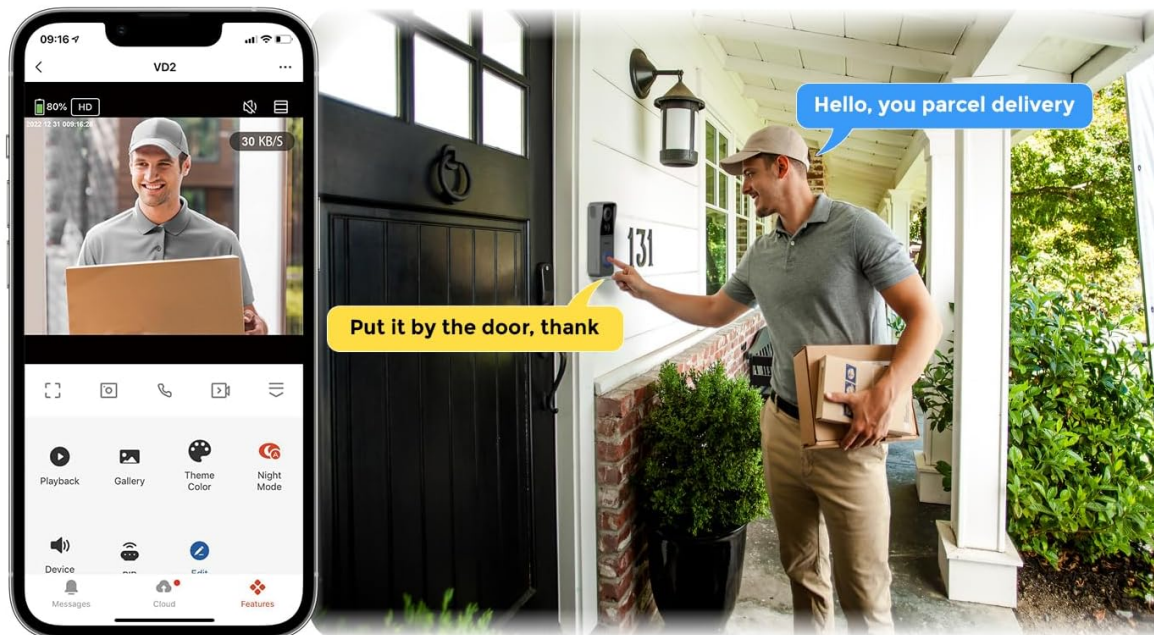

Never miss any visitor or parcel with 3M HD Video from the doorbell with PIR detection

Image 6: A person at the door interacting via the doorbell's two-way audio feature, with the smartphone app displaying the live feed and communication options.



Image 7: A woman smiling while interacting with someone at the door through the doorbell's two-way audio, with speech bubbles indicating conversation.

5.2. Motion Detection Alerts

The built-in PIR motion sensor will detect human movement and send instant notifications to your Xodo App. You can adjust motion sensitivity settings within the app to minimize false alerts.

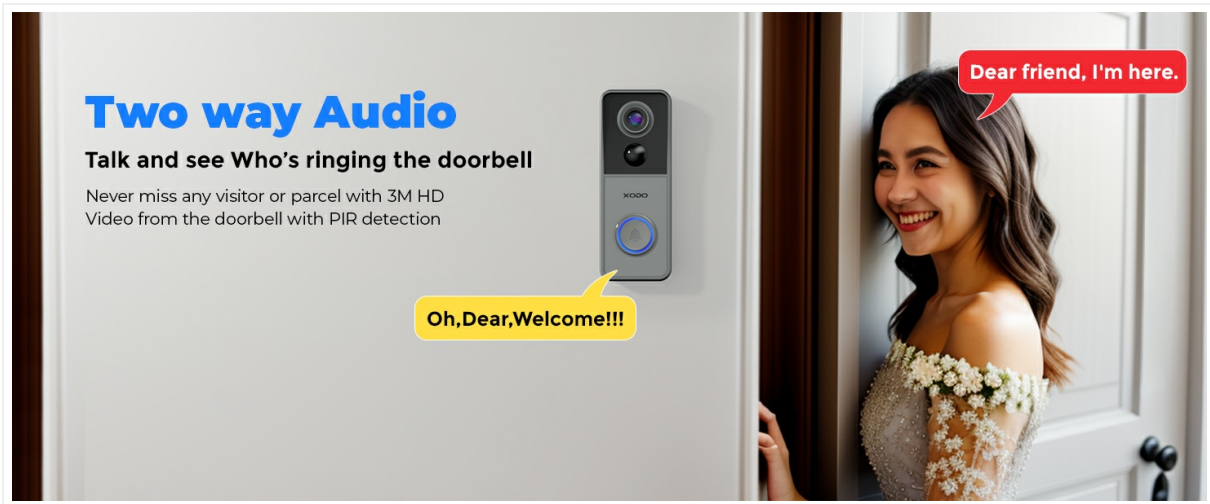


Image 8: A visual representation of the PIR detection zone extending from the doorbell, highlighting its ability to detect human presence from 10-30 feet.

5.3. Night Vision

The doorbell automatically switches to night vision mode in low-light conditions, providing clear black-and-white video footage. This ensures continuous monitoring day and night.



Image 9: A split image showing the doorbell's 2K FHD video quality during the day (color) and its clear infrared night vision (black and white).

5.4. Video Playback and Storage

Recorded videos can be accessed and played back through the Xodo App. If a MicroSD card is installed, recordings are stored locally. Cloud storage options are also available with a free trial period.

5.5. Family Sharing

Share access to your doorbell's live feed and features with family members through the Xodo App. This allows multiple users to monitor and interact with the doorbell.



Image 10: The doorbell and a smartphone displaying the app interface, surrounded by circular images of people, illustrating the video sharing capability among family members.

6. MAINTENANCE

- **Cleaning:** Wipe the doorbell's lens and body with a soft, damp cloth to remove dust and smudges. Do not use harsh chemicals or abrasive cleaners.
- **Battery Life:** Monitor the battery level via the Xodo App. Recharge the doorbell when the battery is low to ensure continuous operation.
- **Firmware Updates:** Regularly check the Xodo App for available firmware updates to ensure optimal performance and access to new features.



Image 11: The doorbell being exposed to rain, emphasizing its IP65 waterproof rating and readiness for various weather conditions.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Doorbell not connecting to Wi-Fi	Incorrect Wi-Fi password, 5GHz network, weak signal	Ensure correct 2.4GHz Wi-Fi, check signal strength, restart router/doorbell.
No motion detection alerts	PIR sensitivity too low, incorrect settings	Adjust PIR sensitivity in the app, ensure motion detection is enabled.
Poor video quality	Weak Wi-Fi signal, dirty lens	Improve Wi-Fi signal, clean the camera lens.
Chime not ringing	Low chime batteries, out of range	Replace AAA batteries in chime, move chime closer to doorbell.

8. SPECIFICATIONS


Feature	Detail
Model Name	VD2
Video Capture Resolution	3 MP (2K FHD)
Connectivity Technology	Wireless (2.4GHz Wi-Fi)
Power Source	Battery Powered (4800mAh rechargeable)
International Protection Rating	IP65 (Weatherproof)
Special Feature	2-Way Audio, PIR Motion Detection, Night Vision
Storage Support	Up to 128GB Micro SD (not included), Cloud Storage
Compatible Devices	Smartphone (Alexa & Google Assistant Compatible)
Mounting Type	Wall Mount
Item Weight	14.9 ounces

Feature	Detail
Package Dimensions	7.01 x 3.94 x 2.91 inches

9. WARRANTY AND SUPPORT

XODO is committed to ensuring customer satisfaction. While specific warranty details are not provided in this manual, XODO strives to offer smart platforms and is dedicated to helping customers with their products. For any inquiries or support needs, please refer to the contact information provided with your product packaging or visit the official XODO website.

Related Documents

 The image shows the cover of a quick start guideline for the Xodo WiFi Smart Socket WP3. It features the XODO logo at the top, a photograph of the white smart socket in the center, and the title 'Xodo WiFi Smart Socket WP3 Quick Start Guideline' below it. At the bottom, there is a small disclaimer: 'Read before installing or using this product. Keep this guide for future reference. Visit Xodo.com for firmware updates.'	<p>Xodo WiFi Smart Socket WP3 Quick Start Guideline</p> <p>A quick start guideline for the Xodo WiFi Smart Socket WP3, covering setup, installation, app integration with Google Home and Alexa, and basic operation.</p>
---	---

Documents - XODO – VD2

no relevant documents