

Jackery Explorer 300 Plus

Jackery Explorer 300 Plus Portable Power Station User Manual

Model: Explorer 300 Plus | Brand: Jackery

1. INTRODUCTION

Thank you for choosing the Jackery Explorer 300 Plus Portable Power Station. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your device. The Explorer 300 Plus is a lightweight and versatile power solution, ideal for outdoor activities, camping, road trips, and emergency backup, featuring a 288Wh LiFePO4 battery and a 300W AC outlet.

2. SAFETY INSTRUCTIONS

Please read all safety instructions carefully before using the Jackery Explorer 300 Plus. Failure to follow these instructions may result in electric shock, fire, or serious injury.

- **All-around Safety:** The Explorer 300 Plus incorporates advanced lithium technology, ensuring high temperature resistance and safe operation even at 45°C. It features 52 protective mechanisms, 12 BMS algorithms, and 4 types of physical protection for maximum safety.
- **Superior Reliability:** This product complies with top international safety standards, including FCC/CE, UL 94V-0 flame-retardant, Class 9 impact resistant, and is UL certified.
- Do not disassemble, repair, or modify the unit.
- Avoid exposure to rain or moisture.
- Keep away from open flames or high temperatures.
- Store in a cool, dry place when not in use.
- Ensure proper ventilation during operation.

3. PRODUCT OVERVIEW

3.1 Components

The Jackery Explorer 300 Plus package includes the following items:

- 1x Jackery Explorer 300 Plus Portable Power Station
- 1x AC Charge Cable
- 1x DC7909 to USB-C Adaptor (for solar panel connection)

- 1x User Manual


3.2 Features

- **Lightweight and Portable:** Weighing only 3.75 KG (8 pounds), the Explorer 300 Plus is designed for easy portability, making it ideal for various outdoor and travel scenarios.
- **High Capacity:** Equipped with a 288Wh LiFePO4 battery, providing reliable power for multiple devices.
- **Multiple Outputs:** Features a 300W AC outlet, USB-A (15W max), and dual PD USB-C ports (1x 100W input/output, 1x 15W output) for diverse charging needs.
- **Fast Charging:** Can be fully charged in approximately 4 hours via a SolarSaga 100W Solar Panel (optional) or via AC wall charge, USB-C, or car charge.
- **Long-lasting Lifespan:** Thanks to Jackery's innovative ChargeShield technology and durable LFP (LiFePO4) batteries, the battery life is boosted by 50%, ensuring up to 10 years of use with regular recharging.
- **Smart App Control:** Monitor and control the power station remotely via Wi-Fi or Bluetooth using the Jackery App, allowing for battery level checks and customized settings.



Figure 3.1: Front view of the Jackery Explorer 300 Plus, showing various ports and the display screen.

SOLAR GENERATOR IN YOUR BACKPACK

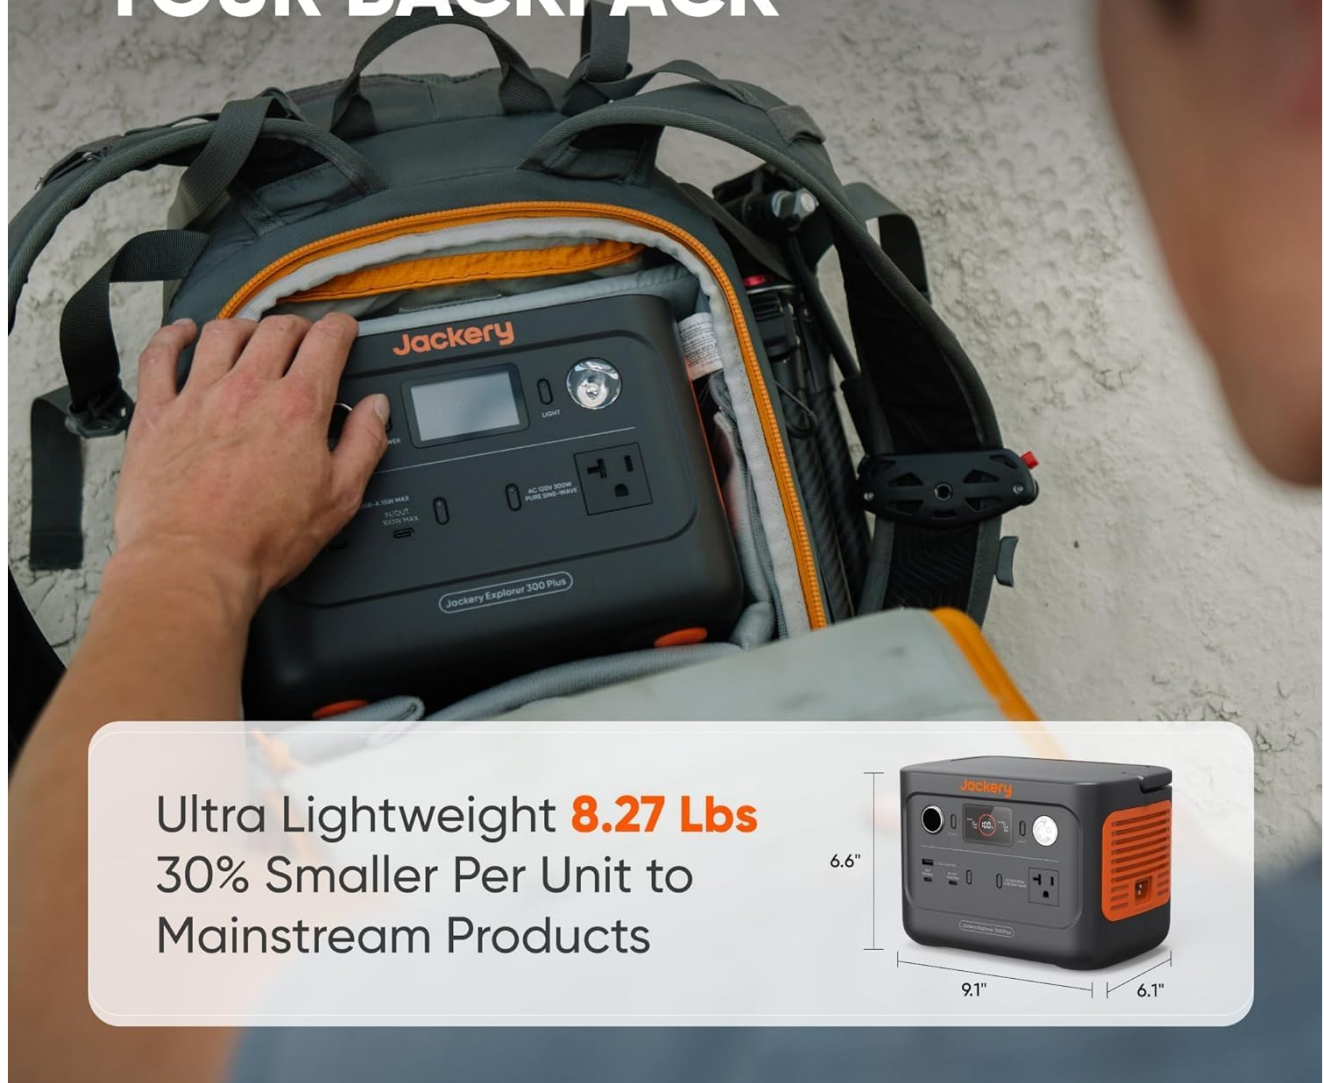

Ultra Lightweight **8.27 Lbs**
30% Smaller Per Unit to
Mainstream Products



Figure 3.2: The Jackery Explorer 300 Plus demonstrating its compact size and portability, fitting easily into a backpack.

4. SETUP

The Jackery Explorer 300 Plus is designed for ease of use with a simple one-button start.

1. **Unpacking:** Carefully remove all components from the packaging. Verify that all items listed in Section 3.1 are present.
2. **Initial Charge:** It is recommended to fully charge the power station before first use. Refer to Section 5.1 for charging methods.
3. **Power On/Off:** Press the **POWER** button to turn the unit on or off. The display screen will illuminate upon activation.

5. OPERATING INSTRUCTIONS

5.1 Charging the Explorer 300 Plus

The Explorer 300 Plus offers multiple convenient charging options:

- **AC Wall Charge:** Connect the provided AC Charge Cable to the AC input port on the power station and plug it into a standard wall outlet.
- **Solar Charge:** Connect a compatible Jackery SolarSaga Solar Panel (e.g., 100W) to the DC input port using the DC7909 to USB-C Adaptor. Position the solar panel in direct sunlight for optimal charging.
- **USB-C Charge:** Use a USB-C to USB-C cable to charge the unit via the 100W PD USB-C port.
- **Car Charge:** Connect the power station to your vehicle's 12V car outlet using a compatible car charger (not included, but can be purchased separately).

4 SIMPLE WAYS FOR QUICK CHARGING

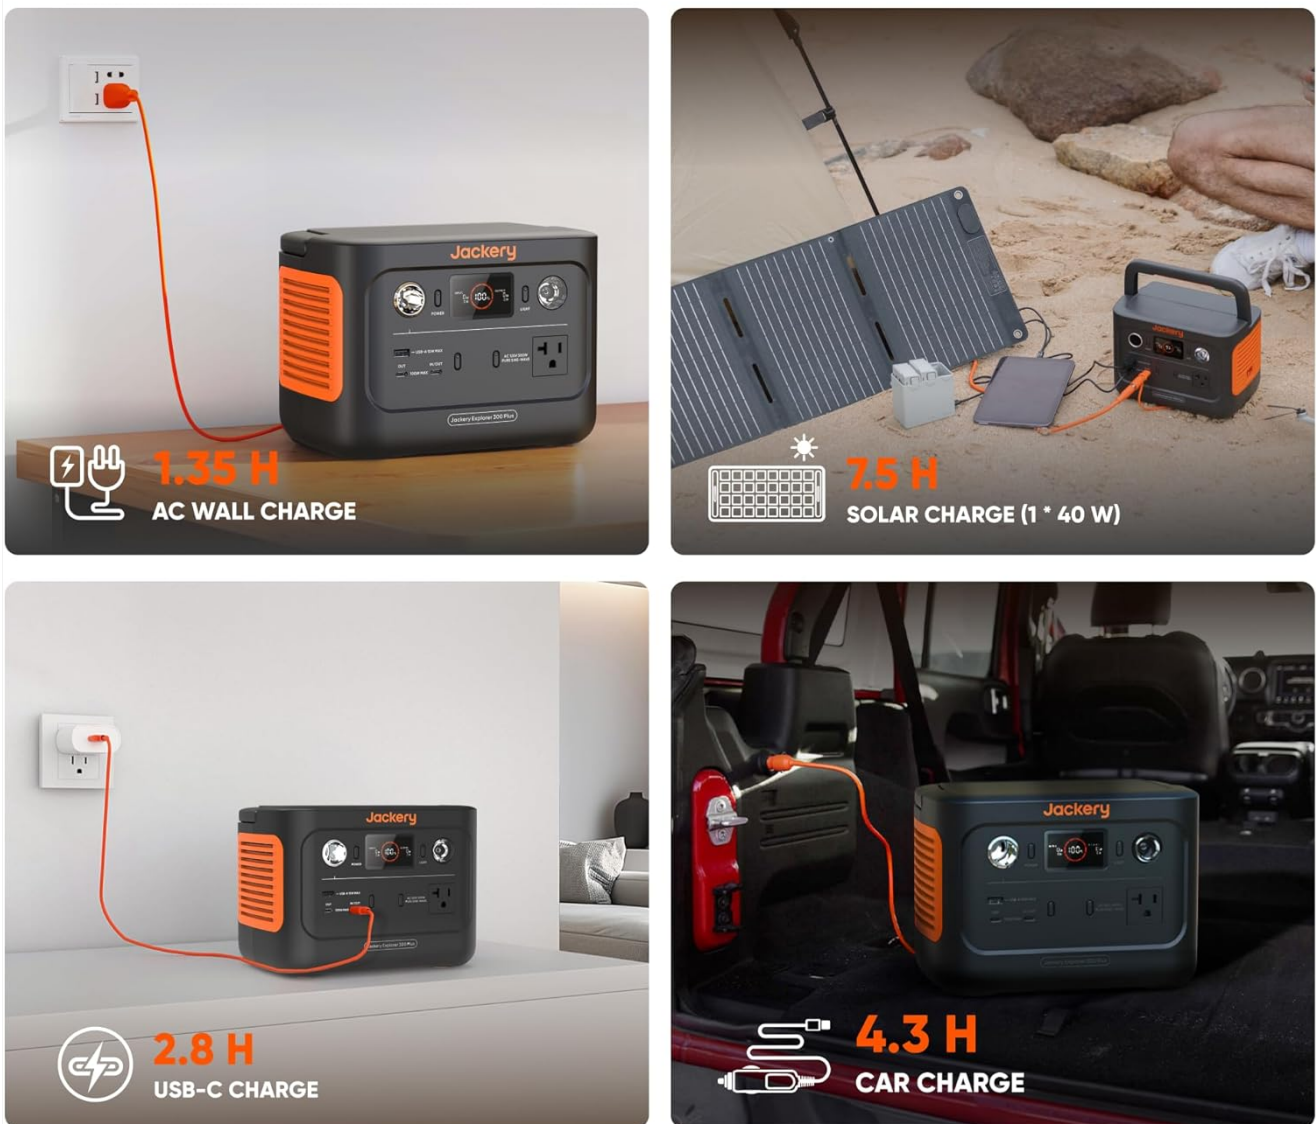


Figure 5.1: Visual representation of the four primary charging methods for the Explorer 300 Plus.

5.2 Discharging and Using the Power Station

To power your devices, simply plug them into the appropriate output ports on the Explorer 300 Plus.

- **AC Output:** For devices requiring 110V AC power (up to 300W), plug them into the AC outlet.
- **USB-A Output:** Connect USB-A compatible devices for charging (up to 15W).
- **USB-C Output:** Utilize the dual USB-C ports for fast charging of compatible devices (100W input/output and 15W output). These ports allow for simultaneous charging of two devices.

POWER YOUR NEEDS

Supports 1-2 Days Outdoor Exploration

288Wh | 300W



Figure 5.2: The Explorer 300 Plus powering various devices, illustrating its capacity for 1-2 days of outdoor exploration.

DUAL 100 W PD CHARGES 2 DEVICES AT ONCE



Figure 5.3: The power station simultaneously charging a laptop and a smartphone via its dual USB-C ports.

5.3 Smart App Control

Manage your Explorer 300 Plus conveniently using the Jackery App.

1. **Download the App:** Search for "Jackery" on the App Store (iOS) or Google Play Store (Android) and install the application.
2. **Connect:** Open the app and follow the on-screen instructions to connect your Explorer 300 Plus via Wi-Fi or Bluetooth.
3. **Monitor & Control:** Once connected, you can monitor the remaining battery level, input/output wattage, and customize various settings to suit your needs.

CONTROL AT YOUR FINGERTIPS

Monitor & control with ease

Download the **JACKERY** App



Download on the
App Store



GET IT ON
Google Play

Figure 5.4: The Jackery App interface, allowing users to monitor and control the power station remotely.

6. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your Jackery Explorer 300 Plus.

- **Storage:** Store the power station in a cool, dry place, away from direct sunlight and extreme temperatures.
- **Charging Frequency:** For optimal battery health, it is recommended to fully charge the unit at least once every 3-6 months, even if not in use.
- **Cleaning:** Use a dry, soft cloth to clean the exterior of the unit. Do not use abrasive cleaners or immerse the unit in water.
- **Battery Lifespan:** The durable LFP (LiFePO₄) batteries, combined with Jackery's ChargeShield technology and BMS protections, are designed for up to 3,000 charge cycles, ensuring a lifespan of up to 10 years with typical use.

7. TROUBLESHOOTING

If you encounter issues with your Jackery Explorer 300 Plus, please refer to the following common solutions:

- **Unit Not Turning On:** Ensure the battery is charged. If not, connect it to a power source using one of the charging methods described in Section 5.1.
- **Devices Not Charging:** Check if the power station is turned on. Verify that the cables are securely connected to both the power station and the device. Ensure the device's power requirements do not exceed the power station's output limits (e.g., 300W for AC).
- **Abnormal Display Readings:** Try restarting the unit by turning it off and then on again. If the issue persists, contact Jackery customer support.
- **App Connectivity Issues:** Ensure Wi-Fi or Bluetooth is enabled on your smartphone and the power station. Try restarting both the app and the power station.

For more detailed troubleshooting or persistent issues, please visit the official Jackery support website or contact their customer service.

8. SPECIFICATIONS

Attribute	Value
Brand	Jackery
Model Name	JE-300B (Explorer 300 Plus)
Battery Type	LiFePO4 (Lithium Iron Phosphate)
Capacity	288Wh
AC Output	300W (Pure Sine Wave), 110V AC
USB-C Output/Input	1x 100W PD (Input/Output), 1x 15W Output
USB-A Output	15W Max
Dimensions (L x W x H)	9.1"L x 6.1"W x 6.6"H
Item Weight	3.75 KG (8 Pounds)
Charging Time (SolarSaga 100W)	Approx. 4 hours
Lifespan	Up to 10 years (3,000+ charge cycles)
Certifications	FCC/CE, UL 94V-0 flame-retardant, Class 9 impact resistant, UL certified

9. WARRANTY AND SUPPORT

Jackery products are built with quality and reliability in mind. For information regarding your product's warranty, please refer to the warranty card included in your product packaging or visit the official Jackery website.





Customer Support: If you have any questions, require technical assistance, or need to report an issue, please contact Jackery customer support through their official website: www.jackery.com/support.


Please have your product model number (Explorer 300 Plus) and purchase details ready when contacting support.

10. OFFICIAL PRODUCT VIDEOS

No official product videos from the seller were found that meet the embedding criteria (creator_type: "Seller"). Please refer to the product page on Amazon for any available video content.

Related Documents

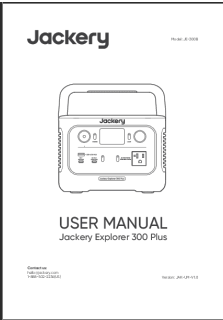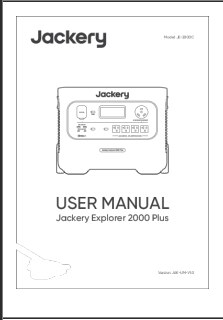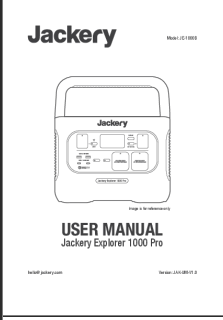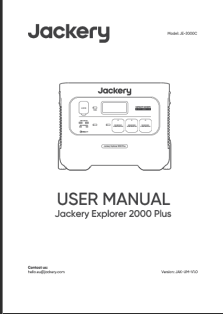
	Jackery Explorer 300 Plus Portable Power Station User Manual This comprehensive user manual guides you through the features and operation of the Jackery Explorer 300 Plus portable power station. Learn about its technical specifications, how to safely charge and use the device, and understand its various functions for reliable power on the go.
	Jackery Explorer 2000 Plus User Manual User manual for the Jackery Explorer 2000 Plus portable power station. Covers specifications, operations, charging, safety, and app usage.
	Jackery Explorer 1000 Pro User Manual User manual for the Jackery Explorer 1000 Pro portable power station, detailing its features, specifications, operation, charging methods, safety precautions, and warranty information.
	Jackery Explorer 2000 Plus User Manual - Portable Power Station Guide Comprehensive user manual for the Jackery Explorer 2000 Plus portable power station. Learn about its features, specifications, operation, charging methods, safety precautions, and warranty.

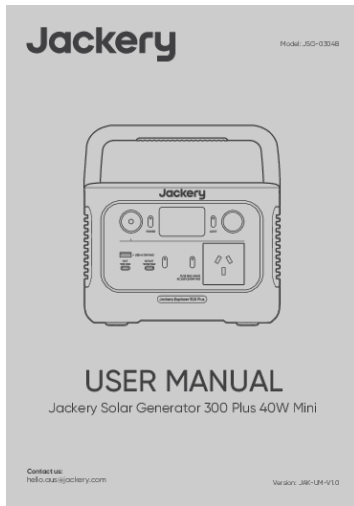

[\[pdf\]](#) User Manual Instructions Specifications Dimension Guide Guide

Jackery Explorer 300 Plus 40W Mini Portable Power Station User Manual AU USER MANUAL Mar 17 2024 — Failure to follow these instructions may result in equipment failure or loss of data for which we cannot be held responsible Page 5 04 Battery Solar Generator r jackery net productGuide ||| Model: JSG-0304B USER MANUAL Jackery Solar Generator 300 Plus 40W Mini Contact us: hello.aus jackery.com Version: JAK-UM-V1.0 Congratulations on your new Jackery **Explorer 300 Plus**. Please read this manual carefully before using the product, particularly the relevant precautions to ensure proper...


lang:en score:49 filesize: 3.62 M page_count: 14 document date: 2024-02-27

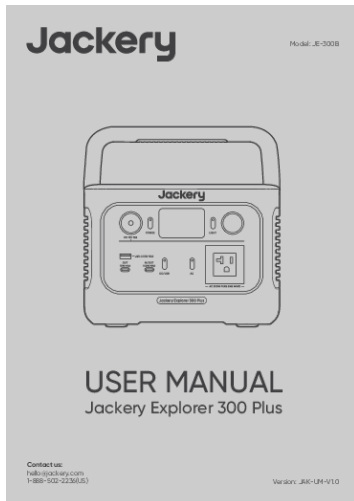

[\[pdf\]](#) User Manual Specifications Dimension Guide Guide

Jackery Explorer 300 Plus Portable Power Station User Manual B r jackery net productGuide ||| Model: JE-300B USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR Franais ES Espaol PT Portugus 01-12 13-24 25-36 37-48 US English Model: JE-300B Congratulations on your new Jackery **Explorer 300 Plus**. Please re...


lang:en score:45 filesize: 10.53 M page_count: 51 document date: 2024-09-03

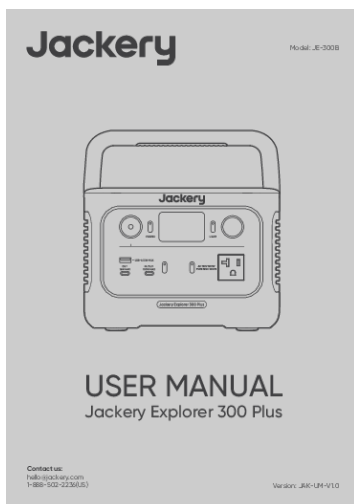

[Jackery Explorer 300 Plus Portable Power Station User Manual](#)

This comprehensive user manual guides you through the features and operation of the Jackery Explorer 300 Plus portable power station. Learn about its technical specifications, how to safely charge and use the device, and understand its various functions for reliable power on the go.

lang:en score:44 filesize: 7.02 M page_count: 44 document date: 2023-08-30

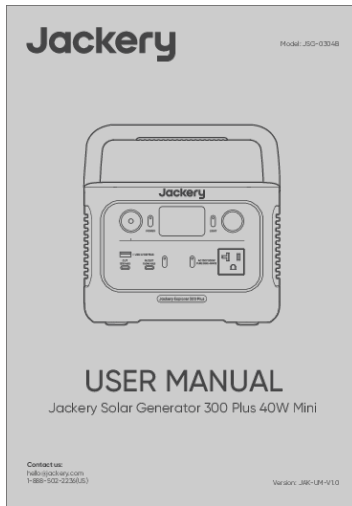

[\[pdf\]](#) User Manual Specifications Dimension Guide


Jackery Explorer 300 Plus 40W Mini Portable Power Station User Manual Solar Generator For Camping — The RV Outpostjackery explorer manualcdn shopify s files 1 0673 0403 0441 jackery manual v 1719528578 |||

Model: JSG-0304B USER MANUAL Jackery Solar Generator 300 Plus 40W Mini

Contact us: hello@jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0

CONTENTS US English FR Franais ES Espaol PT Portugus 01-12 13-24 25-36 37-48 US English Model: JSG-0304B Congratulations on your new Jackery Explorer...

lang:en score:42 filesize: 8.98 M page_count: 51 document date: 2024-04-18

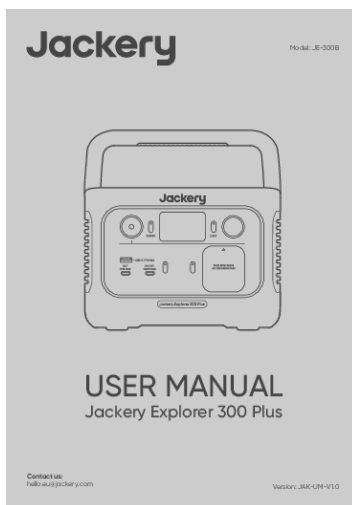

[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 300 Plus Portable Power Station User Manual EU mmo 116109023 1697464698 283 1924 JE 300B von expert Technomarkt files technomarkt de manual |||


Model: JE-300B 5 USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello.eu

jackery.com Version: JAK-UM-V1.0 CONTENTS GB English FR Franais DE Deutsch

IT Italiano ES Espaol PT Portugus 01-08 09-16 17-24 25-32 33-40 41-48 More

language versions are supported. Other language versions of the ma...

lang:en score:42 filesize: 2.79 M page_count: 51 document date: 2023-09-15

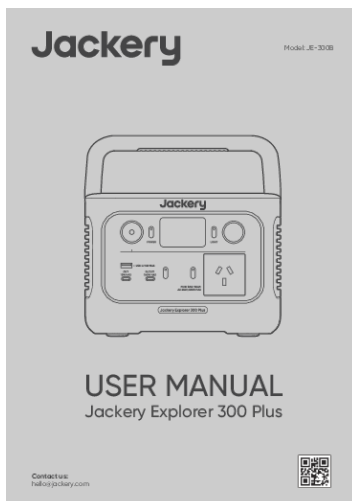

[\[pdf\]](#) User Manual Specifications Dimension Guide Borchure

Jackery Explorer 300 Plus Portable Power Station User Manual AU JAE300PLUS 53321 ds net au assets files web documents product brochure 1 jackery |||

Model: JE-300B USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello

jackery.com Congratulations on your new Jackery **Explorer 300 Plus**. Please read

this manual carefully before using the product, particularly the relevant precautions to ensure proper use. Keep this manual in an accessible place ...

lang:en score:42 filesize: 1.77 M page_count: 10 document date: 2023-10-23




[\[pdf\]](#) User Manual

Jackery Explorer 300 Plus Portable Power Station User Manual EU UK Pluscontent rozetka ua âº original 426614748 content goods documents |||

: JE-300B 5 Jackery **Explorer 300 Plus** : hello.eu jackery.com : JAK-UM-V1.0 : JE-300B Jackery **Explorer 300 Plus**. , , , , , , , - , . . USB-A 2 x USB-C USB . . USB-C Jackery **Explorer 300 Plus** JE-300B -...


lang:i-klngon **score:41** filesize: 798.93 K page_count: 10 document date: 2024-04-16

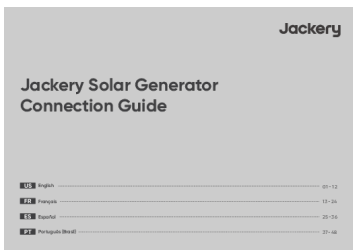

[Jackery Solar Generator Connection Guide: SolarSaga Panels to Explorer Power Stations](#)

A comprehensive guide detailing how to connect Jackery SolarSaga solar panels (models JS-40A, SPL061, JS-80A, JS-100A, JS-100C, JS-100D, JS-100E, JS-100F, JS-200A, JS-200C, JS-200D, JS-85A, JS-500A) to various Jackery Explorer power station models using USB-C, DC7909, and DC8020 input ports.

lang:en **score:40** filesize: 3.73 M page_count: 14 document date: 2024-12-10

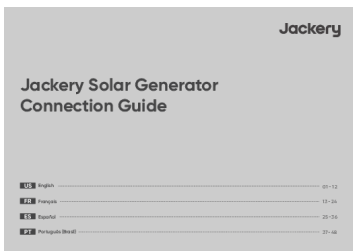


[\[pdf\]](#) Instructions Guide

Jackery Solar Generator Connection Guide SolarSaga 100W Bifacial Portable Panel for Explorer 240 300 500 1000 1500 Power Stations Foldable Cell Charger with USB Outputs Phones Rooftops Outdoor Camping and RVs Instructions Use IFU JS 100F B0D323N25V B0D5CCY5Y2 Patio Lawn Garden B1H1GTrGWrl m media amazon images I |||

Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-1 ... Connection Method Connection Details USB-C Explorer 100 Plus Explorer 240 V2 Explorer 280 Plus **Explorer 300 Plus** 1. Connect the DC8020 output port of the solar panel to the input port of the DC8...

lang:en **score:39** filesize: 3.73 M page_count: 14 document date: 2024-12-10

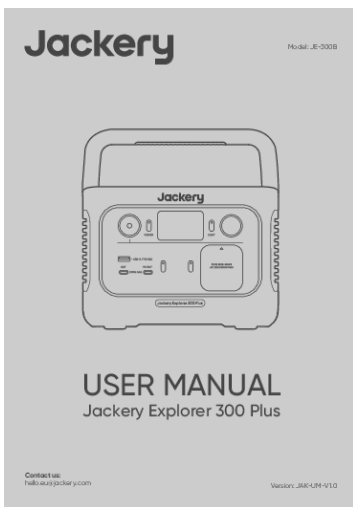

[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 300 Plus Portable Power Station User Manual EU UK 137480 183 ffm campingshopwagner 0 s3 eu central 1 amazonaws products criteria media |||


Model: JE-300B 5 USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello.eu jackery.com Version: JAK-UM-V1.0 CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol 01-08 09-16 17-24 25-32 33-40 More language versions are supported. Other language versions of the manual can be downlo...

lang:en **score:39** filesize: 7.57 M page_count: 44 document date: 2023-05-10

[pdf] User Manual Guide

Jackery Solar Generator Connection Guide connector user manualJackery Cable Connector Everything You Need to Know NVMOscdn shopify s files 1 0861 5113 5535 v 1751044533 SOLAR GENERATOR CONNECTION GUIDEconnector Saga 100W Panel 21 0002 000058 — SmartYardTechJackery 0558 6436 1026 1736969603cdn manualconnector NVMOJackery Cables Connectors Complete Jackerycdn 1751044533cdn 0970 9262 manualDownloadJackery JackeryJackery SolarSaga 80W Bifacial 22V IP68 Rating epowerguyscdn Guidedcdn 0592 6269 7526 1734341769 GUIDESOLAR 200W 000063 epowerguysJackery 2cdn 2 1736971061cdn ||| ||| Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-12 13-24 25-36 37-48 Jackery Solar Generator Connection Guide CONTENTS Jackery SolarSaga 40 Mini Solar Panel JS-40A Jackery SolarSaga 60 Solar Pa ||| Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-12 13-24 25-36 37-48 Jackery Solar Generator Connection Guide CONTENTS Jackery SolarSaga 40 Mini Solar Panel JS-40A Jackery SolarSaga 60 Solar Pa ||| Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-12 13-24 25-36 37-48 Jackery Solar Generator Connection Guide CONTENTS Jackery SolarSaga 40 Mini Solar Panel JS-40A Jackery SolarSaga 60 Solar Pa ||| Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-12 13-24 25-36 37-48 Jackery Solar Generator Connection Guide CONTENTS Jackery SolarSaga 40 Mini Solar Panel JS-40A Jackery SolarSaga 60 Solar Pa ... rtable Power Station Connection Method USB-C Explorer 100 Plus Explorer 240 V2 Explorer 280 Plus **Explorer 300 Plus** 1. Connect the DC8020 output port of the solar panel to the input port of the DC8...


lang:en score:39 filesize: 13.34 M page_count: 54 document date: 2024-12-13

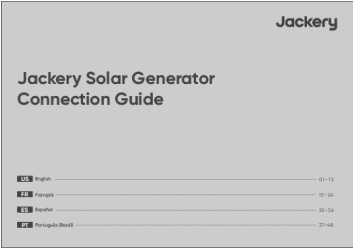

[pdf] User Manual Specifications Dimension Guide

Jackery Explorer 300 Plus 40W Mini Portable Power Station User Manual Manual Solar Buy Now! Paradise v 1713455268 cdn shopify s files 1 0628 1773 0784 ||| Model: JSG-0304B USER MANUAL Jackery Solar Generator 300 Plus 40W Mini Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR Franais ES Espaol PT Portugus 01-12 13-24 25-36 37-48 US English Model: JSG-0304B Congratulations on your new Jackery Explorer...


lang:en score:38 filesize: 8.98 M page_count: 51 document date: 2024-04-18

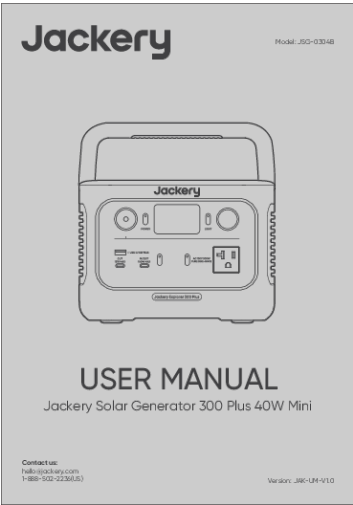


[pdf] Guide

User Guide Jackery United Kingdom Solar Generator Connection v 1735529250 cdn shopify s files 1 0569 8116 0124 ||| Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-1 ... rtable Power Station Connection Method USB-C Explorer 100 Plus Explorer 240 V2 Explorer 280 Plus **Explorer 300 Plus** 1. Connect the DC8020 output port of the solar panel to the input port of the DC8...

lang:en score:37 filesize: 2.65 M page_count: 54 document date: 2024-12-30

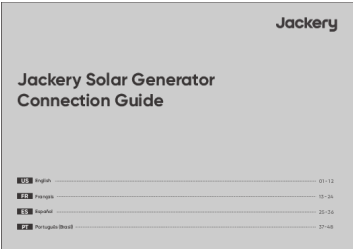


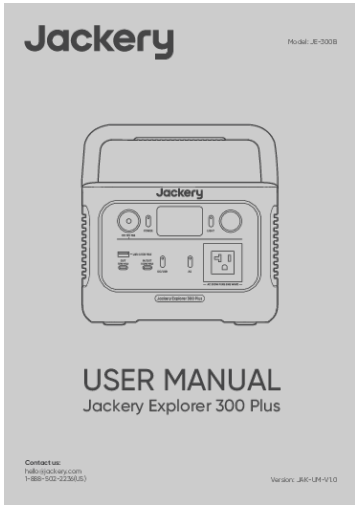

[\[pdf\]](#) User Manual Specifications Dimension Guide


Jackery Explorer 300 Plus Portable Power Station User Manual B Stations for Sale Outbound
PowerJackery 27d98c41 2d7d 4903 a06c ee49a1fc743acd shopify s files 1 0643 9128 2937
ee49a1fc743a v 1736331816 |||

Model: JE-300B USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello
jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR
Franais ES Espaol PT Portugus 01-12 13-24 25-36 37-48 US English Model: JE-300B
Congratulations on your new Jackery **Explorer 300 Plus**. Please re...
lang:en score:37 filesize: 10.53 M page_count: 51 document date: 2024-09-03

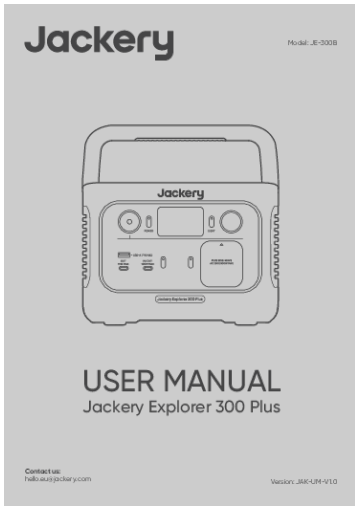

[\[pdf\]](#) User Manual Specifications Dimension Guide


Jackery Explorer 300 Plus Portable Power Station User Manual EU USER MANUAL
UndertwokCongratulations on your new Please read this manual carefully before using the product
particularly relevant precautions to Jackery EU11undertwok 2024 06 EU11 srsltid
AfmBOooxbcejF4ZF4wyXSLlexUm1JJJ7cLWSzG3qepxlwdF vFuxww2a UndertwokUSER
to Congratulations EU11Jackery vFuxww2aundertwok AfmBOopjJ dH4FhdZ
JWLZ429KNNgr8YK8RdLoYC7r1sBAnQVbUSGubR Pro series and excluding * DC8020 DC7909 port
applies to 160 240 500 1000 3m 3mJackery EU11v1undertwok
JWLZ429KNNgr8YK8RdLoYC7r1sBAnQVbUSGubRundertwok AfmBOoo3T5bAz4GUYE1
Ev6jjuj7BrCg7NCIphHpkoEAC7 Ykpj6GLsE ||| ||| Model: JE-300B 5 USER MANUAL Jackery Explorer
300 Plus Contact us: hello.eu jackery.com Version: JAK-UM-V1.0 CONTENTS GB English FR Franais
DE Deutsch IT Italiano ES Espaol PT Portugus 01-08 09-16 17-24 25-32 33-40 41-48 More language versi
||| Model: JE-300B 5 USER MANUAL Jackery Explorer 300 Plus Contact us: hello.eu jackery.com
Version: JAK-UM-V1.0 CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT
Portugus 01-08 09-16 17-24 25-32 33-40 41-48 More language versi
Model: JE-300B 5 USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello.eu
jackery.com Version: JAK-UM-V1.0 CONTENTS GB English FR Franais DE Deutsch
IT Italiano ES Espaol PT Portugus 01-08 09-16 17-24 25-32 33-40 41-48 More
language versions are supported. Other language versions of the ma...
lang:en score:37 filesize: 2.51 M page_count: 51 document date: 2024-06-19

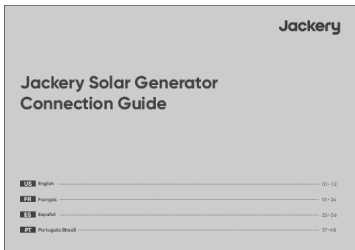

[\[pdf\]](#) Guide


Jackery Solar Generator Connection Guide 20211213 solarny 3000 Pro EU v 1736911676 cdn shopify s
files 1 0733 5644 3969 |||

Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT
Portugus Brasil 01-1 ... rtable Power Station Connection Method USB-C Explorer 100
Plus Explorer 240 V2 Explorer 280 Plus **Explorer 300 Plus** 1. Connect the DC8020
output port of the solar panel to the input port of the DC8...
lang:en score:36 filesize: 13.31 M page_count: 54 document date: 2024-12-13

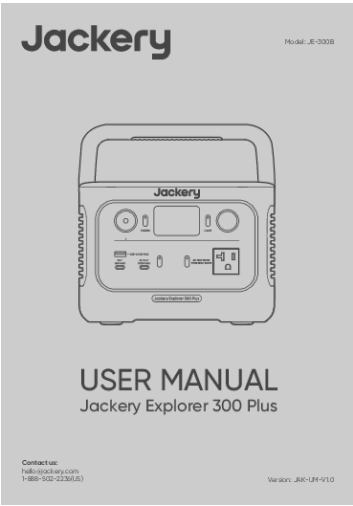


[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 300 Plus Portable Power Station User Manual Solar Kit OutletJackery Manualcdn shopify s files 1 0643 9128 2937 v 1695682808 Solution — Tiny Home EquipmentJackery 1695682808cdn 0594 7179 0212 1701289255 ||| ||| Model: JE-300B USER MANUAL Jackery Explorer 300 Plus Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR Franais ES Espaol PT-BR Portugus Brasil 01-10 11-20 21-30 31-40 US English Model: JE-300B Congr Model: JE-300B USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR Franais ES Espaol PT-BR Portugus Brasil 01-10 11-20 21-30 31-40 US English Model: JE-300B Congratulations on your new Jackery Explorer 300 Plu... lang:en score:36 filesize: 7.02 M page_count: 44 document date: 2023-08-30

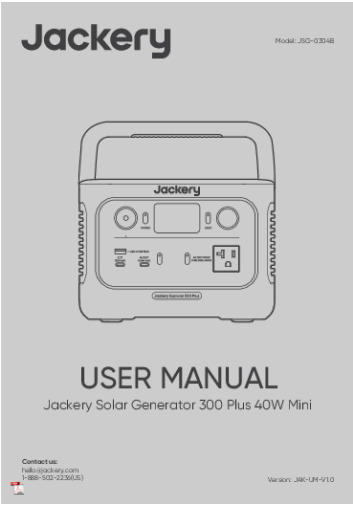


[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 300 Plus 40W Mini Portable Power Station User Manual Solar Generator with Book sized Panel 288Wh Backup LiFePO4 Battery 300W AC Outlet Only 5KG for RV Outdoors Camping Traveling and Emergencies C1o1T gZp1L m media amazon images I ||| Model: JSG-0304B USER MANUAL Jackery Solar Generator 300 Plus 40W Mini Contact us: hello jackery.c ... rasil 01-12 13-24 25-36 37-48 US English Model: JSG-0304B Congratulations on your new Jackery **Explorer 300 Plus**. Please read this manual carefully before using the product, particularly the rele... lang:en score:35 filesize: 7.61 M page_count: 52 document date: 2023-08-30

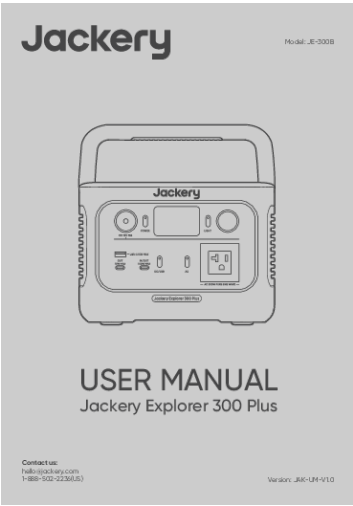

[\[pdf\]](#) User Manual Specifications Dimension Guide Catalog

Jackery Explorer 300 Plus Portable Power Station User Manual B 300W Continuous 600 Watt Peak Output Push Button Start Battery Generator for Outdoors 21 0001 000008Y The Home Depotadf5394d 4676 4cf6 88f6 4ade16c8a696images thdstatic catalog Images ad adf5394d 4ade16c8a696 ||| Model: JE-300B USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 CONTENTS US English FR Franais ES Espaol PT Portugus 01-12 13-24 25-36 37-48 US English Model: JE-300B Congratulations on your new Jackery **Explorer 300 Plus**. Please re... lang:en score:35 filesize: 10.53 M page_count: 51 document date: 2024-09-03

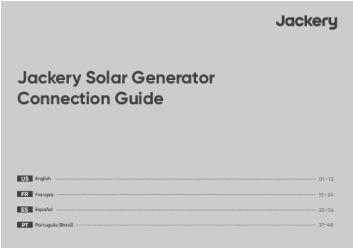

[Jackery Solar Generator Connection Guide](#)

A comprehensive guide to connecting Jackery SolarSaga solar panels with various Jackery power stations. This guide details the connection methods for different solar panel models and power station compatibility. lang:en score:35 filesize: 12.68 M page_count: 54 document date: 2025-07-01




[\[pdf\]](#) User Manual

Jackery Explorer 300 Plus Portable Power Station User Manual EU UK JE 300B OBI AC Ladekabel DC7909 zu USB C Schnellstartanleitung Herzlichen Glückwunsch Ihrem neuen Bitte lesen document bilder obi de 50821b97 fc44 4a01 b77d df6d94f7661a |||

DE Deutsch Modell: JE-300B Herzlichen Glückwunsch zu Ihrem neuen Jackery **Explorer 300 Plus**. Bitte lesen Sie dieses Handbuch, insbesondere die entsprechenden Vorsichtsmaßnahmen sorgfältig durch, bevor Sie das Produkt verwenden, um eine ordnungsgemäße Verwendung zu gewährleisten. Bewahren Sie dieses Handb...

lang:de score:35 filesize: 5.74 M page_count: 1 document date: 2023-05-10

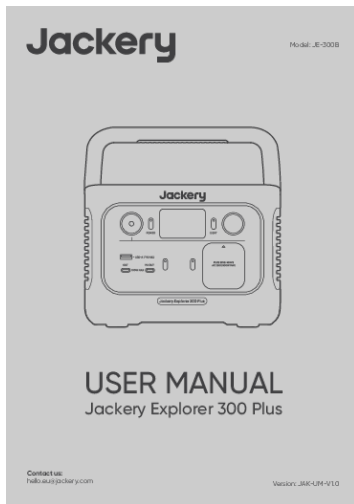


[\[pdf\]](#) User Manual Specifications Dimension Guide

Download bestand Jackery SolarSaga 40 Explorer 300 Plus handleiding bu7mp4 dutchtravelshop woocommerce 2023 09 |||

Model: JE-300B 5 USER MANUAL Jackery **Explorer 300 Plus** Contact us: hello.eu jackery.com Version: JAK-UM-V1.0 CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol 01-08 09-16 17-24 25-32 33-40 More language versions are supported. Other language versions of the manual can be downlo...

lang:en score:34 filesize: 7.54 M page_count: 44 document date: 2023-08-31

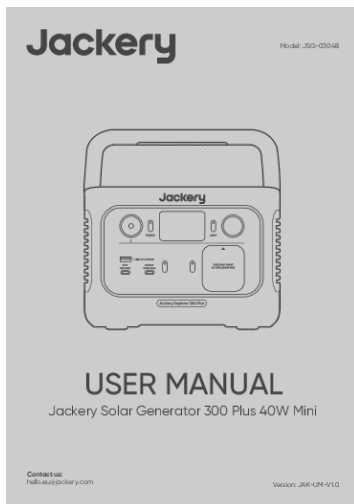


[\[pdf\]](#) User Manual Specifications Dimension Guide Guide


USER MANUAL Jackery Kurzschlussspannung Isc Spannung Vm Betriebsstrom Im Steckdose des Produkts e Zerlegen Sie das Produkt nicht da dies zu Explorer 300Plus40Wmini Portable Power Station User Manual EU 1 r jackery net productGuide |||

Model: JSG-0304B 5 USER MANUAL Jackery Solar Generator 300 Plus 40W Mini Contact us: hello.eu jac ... e.jackery.com/pages/user-guides GB English Model: JSG-0304B Congratulations on your new Jackery **Explorer 300 Plus**. Please read this manual carefully before using the product, particularly the rele...

lang:en score:34 filesize: 9.81 M page_count: 57 document date: 2023-10-09

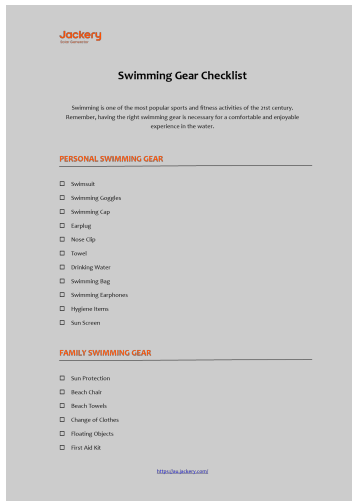

lang:en score:34 filesize: 45.15 K page_count: 3 document date: 2024-04-17

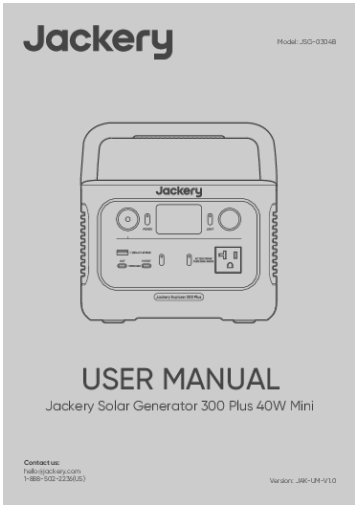


[pdf] User Manual Specifications Dimension Guide Catalog

Jackery Explorer 300 Plus solar saga 40 mini Portable Power Station User Manual Solar Generator 40W Mini El nuevo SolarSaga es compatible con diferentes modelos de estaciones energía portátiles y contiene dos puertos * puerto DC8020 adecuado 65b412af d332 4b77 9ae6 1c719446cc98 images thdstatic catalog Images 65 |||

Model: JSG-0304B 5 USER MANUAL Jackery Solar Generator 300 Plus 40W Mini Contact us: hello jackery.com 1-888-502-2236 US Version: JAK-UM-V1.0 EN English Model: JSG-0304B Congratulations on your new Jackery **Explorer 300 Plus**. Please read this manual carefully before using the product, parti...

lang:en score:33 filesize: 3.88 M page_count: 28 document date: 2023-05-09

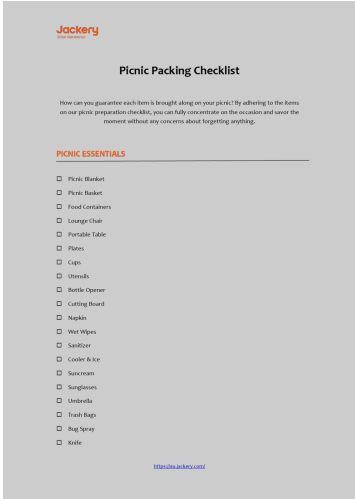


[pdf] Guide

Kira Download The Picnic Packing ListPicnic Guide What to Bring A Checklist Jackery AustraliaPicnic Checklistcdn shopify s files 1 0689 8470 1213 v 1703126763 |||

Picnic Packing Checklist How can you guarantee each item is brought along on your picnic By adheri ... Fan Lighting Personal Items Hat Decorations Flowers Bike Bags Jackery Explorer 500 Jackery **Explorer 300 Plus** Jackery Explorer 240 https://au.jackery.com/ ABOUT JACKERY Jackery is the worl...

lang:en score:33 filesize: 47.42 K page_count: 4 document date: 2023-11-16

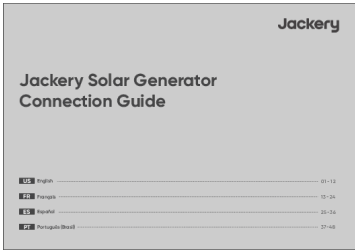


[pdf] Guide

Jackery Solar Generator Connection Guide The DC8020 to USB C adapter cable is sold separately 1 Connect the DC7909 output port of solar panel input Explorer 3000 V2 with 2x 500W Panels b7f450ba b94c 4660 b08f cc5941c901b0 sep turbifycdn ty cdn yhst 99239380869547 |||

Jackery Solar Generator Connection Guide US English FR Franais ES Espaol PT Portugus Brasil 01-1 ... rtable Power Station Connection Method USB-C Explorer 100 Plus Explorer 240 V2 Explorer 280 Plus **Explorer 300 Plus** 1. Connect the DC8020 output port of the solar panel to the input port of the DC8...

lang:en score:32 filesize: 13.34 M page_count: 54 document date: 2024-12-13

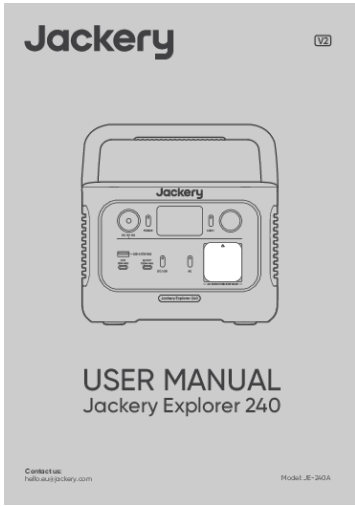


[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 240 V2 Portable Power Station User Manual EU UK v2 UnderTwoK undertwok 2024 09

|||

V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB ... riode de garantie Garantie standard de 3 ans : La priode de la garantie standard du produit Jackery **Explorer 300 Plus** est de 36 mois. Dans chaque cas, la priode de garantie est mesure compter de la d...

lang:en score:27 filesize: 1.77 M page_count: 63 document date: 2024-09-12

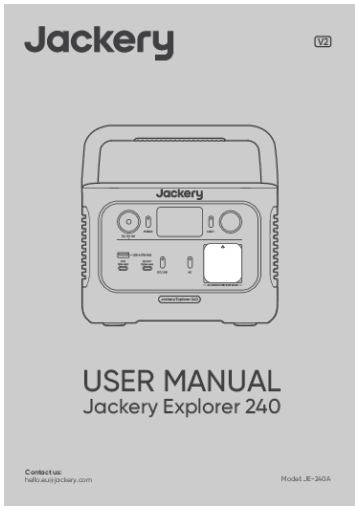


[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 240 V2 Portable Power Station User Manual EU UK v2 v 1722420140 cdn shopify s files

1 0733 5644 3969 |||

V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB ... riode de garantie Garantie standard de 3 ans : La priode de la garantie standard du produit Jackery **Explorer 300 Plus** est de 36 mois. Dans chaque cas, la priode de garantie est mesure compter de la d...

lang:en score:26 filesize: 14.77 M page_count: 63 document date: 2024-01-15

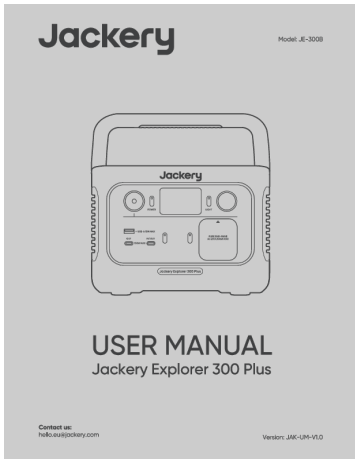

[\[pdf\]](#) User Manual

Jackery Explorer 300 Plus Portable Power Station User Manual EU UK 1 44 400239 Read portable power station manual files hjalp ai ean 190074000911 s |||

AU T O A /C R1 3 5 246 AUTO A/ C R13 5 246 AUTO A/ C R1 3 5 246 AUTO A/C R13 5 246 AUTO A/C R1 3 5 246 ...

lang:en score:24 filesize: 18.12 M page_count: 44 document date: 2023-11-03

[\[pdf\]](#) User Manual Specifications Dimension Guide

Jackery Explorer 240 V2 Portable Power Station User Manual EU UK Manualundertwok 2024 09 srsltid

AfmBOOrZ1f2nNJ4 brWjKwFLrmlt jVHo7Nb Kwlsf8EGN6YjAo4hNK1 ManualJackery

AfmBOOp0bEDMzv7blm7ht2E9hTYkS6hIAuP Ej2 waz3O6KE5FfX4 sKundertwok v1Jackery

AfmBOOrWXkX19 u3gXdlxTCUlrR6yDizEmtRyqAUU6WduS3IJvw4c1xundertwok

Kwlsf8EGN6YjAo4hNK1undertwok AfmBOOqqKWKFMjPPdo8

fFRtdZDqkkocfCvWjME9e95e6BZJf71JS2KW Manualv1Jackery AfmBOOrmtgY iL7YqqnJo7DOxdpUYJ

TT brMVb09x87DeuclXIZLEzfundertwok AfmBOOo8x4dY 7QR6CKRHV0nIjnSaXX 5

YDCsixnMt2794T9lf31F9lundertwok fFRtdZDqkkocfCvWjME9e95e6BZJf71JS2KWundertwok

AfmBOoqoNAiaQ62FLaLXfHWi2FPTb2EPxvbodc7P5DwkzlwXMg8yyxkD v1v1Jackery

AfmBOoqX5ZrMy6ucGlKFlyAgc8gD3WijNRr6q3sGt5ZITqXOskj3TuXjundertwok

AfmBOoro0KUBojtvX85yKKqBC6MPI X4Or7AZHNXEFJiUX5dBo8cQO0cundertwok AfmBOoo4Uv4T

C5nWdXF 4CtcG2f6a8y Y4a8ZzlxXTRL4wo6mrlvcRundertwok Manualv1undertwok

AfmBOoqoNAiaQ62FLaLXfHWi2FPTb2EPxvbodc7P5DwkzlwXMg8yyxkDundertwok

AfmBOoqewRKJczWXEgEQxJlcLgV7pYynMnxKXhHXZTIq NqtECvt IOF

AfmBOorgqxJ8eK0b0AZqzcexvU0pbSkYCYZPNKkC6xrdFrPxc2GmQ78undertwok

Manualv1v1undertwok IOFundertwok AfmBOopmBNbh8QMpGBxqEO7y8uG 46BZ2MPQ5snkITuo

MdMkcO5GGqm AfmBOoqJEdwafgKuwGzeJrL4DRwosCA11L2ELS7QgV6NXu300E4bwZfZundertwok

Manualv1v1Jackery MdMkcO5GGqmundertwok AfmBOopS7Op2CtiQnWo5HaB9qPtEICEOOKJniT8pmQ

s69VxoxHTjwi AfmBOoqp1fC1YAzBDRKsRE3N411GX6D2JOUt9DH0j7yBaHL3QGL8hdyundertwok

Manualv1v1v1Jackery AfmBOopVLEiXJxyTT4QeY 4cUal16 ytdJvZ9PWq4TP9FE3wJoNXg 5undertwok

s69VxoxHTjwiundertwok AfmBOooJB1D7FCR9v4tlHE Xolv3gL8bFNwY7v0vs1IDakhIMNXL8MGk

AfmBOorOd2CdKpEkNdvaGj9zr4WkGgoTiSNjRA5axZJ09YAwPTCSWNgEundertwok ||| ||| V2 USER

MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB

English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60

More language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us:

hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES

Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other

||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A

CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30

31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer

240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT

Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are

supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model:

JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20

21-30 31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL Jackery

Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE

Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions

are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com

Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-

10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL

Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR

Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More

language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu

jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT

Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER

MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB

English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60

More language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us:

hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES

Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other

||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A

CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30

31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer

240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT

Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are


supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model:

JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20


21-30 31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL Jackery

Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR Franais DE

Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions

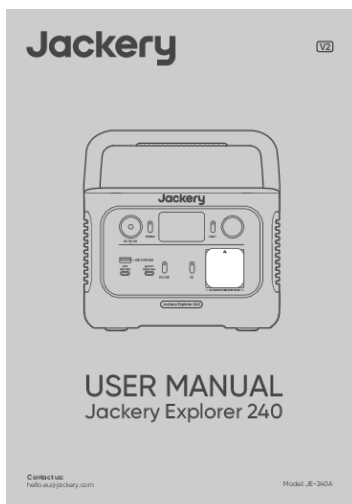

are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com
Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-
10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other ||| V2 USER MANUAL
Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB English FR
Franais DE Deutsch IT Italiano ES Espaol PT Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More
language versions are supported. Other ||| V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu
jackery.com Model: JE-240A CONTENTS GB English FR Franais DE Deutsch IT Italiano ES Espaol PT
Portugus 01-10 11-20 21-30 31-40 41-50 51-60 More language versions are supported. Other
V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model:
JE-240A CONTENTS GB ... riode de garantie Garantie standard de 3 ans : La priode
de la garantie standard du produit Jackery **Explorer 300 Plus** est de 36 mois. Dans
chaque cas, la priode de garantie est mesure compter de la d...
lang:en score:23 filesize: 1.76 M page_count: 63 document date: 2024-09-12

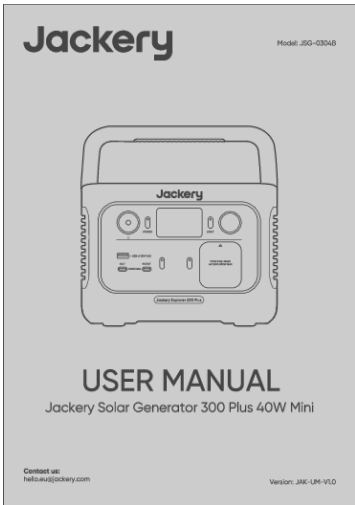

[\[pdf\]](#) User Manual

Jackery Explorer 300 Plus solar saga 40 mini Portable Power Station User Manual EU UK DOWNLOAD
Solar Generator eu jackery content dam sg sg300plus |||

...

lang:en score:23 filesize: 28.73 M page_count: 49 document date: 2023-08-29



[\[pdf\]](#)

Jackery Stories Issue 1About CA CAJackery 2024 ISSUE 1 CACdn shopify s files 0607 3866 6677 v
1719889235 |||

About Jackery Founded in 2012 in California, USA, Jackery was born with a vision to
bring green ene ... ooker 1 H 900W Car Fridge 45 H 60W Portable Air Conditioner 1 H
1150W Projector 9 H 100W **Explorer 300 Plus** Capacity: 288Wh Output: AC 300W
Rated 600W Peak Life Cycle: 3000 cycles to 80 ...

lang:en score:22 filesize: 6.04 M page_count: 30 document date: 2024-07-02

[\[pdf\]](#) User Manual

Jackery Explorer 300 Plus Portable Power Station User Manual EU Congratulations on your new Please read this manual carefully before using the product particularly relevant precautions to ensure proper use EU11 undertwok 2024 06 |||

...

lang:en score:22 filesize: 1 M page_count: 0 document date: 0000-00-00



[\[pdf\]](#) Warranty Catalog

Jackery 300W Continuous 600 Watt Peak Output Power Station Explorcer 300 Plus Push Button Start Battery Generator for Outdoors 21 0001 000008Y The Home Depotdc81d90b e845 4de9 99db 4fc6a48d789cimages thdstatic catalog Images dc dc81d90b 4fc6a48d789c |||

Limited Warranty Jackery Inc. warrants to the original consumer purchaser that the Jackery product will be free from defects in workmanship and materials under normal consumer use during the applicable warranty period identified in the Warranty Period section below, subject to the exclusions state...

lang:en score:21 filesize: 870.91 K page_count: 1 document date: 2024-11-15



[\[pdf\]](#)

Jackery Stories Issue 1 About · 2024 ISSUE US v 1719887249 cdn shopify s files 0970 9262 ||| About Jackery Founded in 2012 in California, USA, Jackery was born with a vision to bring green ene ... ooker 1 H 900W Car Fridge 45 H 60W Portable Air Conditioner 1 H 1150W Projector 9 H 100W **Explorer 300 Plus** Capacity: 288Wh Output: AC 300W Rated 600W Peak Life Cycle: 3000 cycles to 80 ... lang:en score:21 filesize: 6.13 M page_count: 31 document date: 2024-07-02



[\[pdf\]](#) Borchure

Untitled Download Events Podcast Blog UnderTwoK U2K 2025 BROCHURE Q1 undertwok 02 |||

FIND OUT WHAT S ON JAN 2025 - MAR 2025 VOLUME 5 THE NEW YEARS REVOLUTION THE SECTRHEETYTEOASRAOVFI ... from low to high power, such as a mini-fridge, air pump, and TV. JACKERY EXPLORER 240 V2 JACKERY **EXPLORER 300 PLUS** BLUETTI AC 2P 9 PORTABLE SOLAR PANELS SoBlaLUr EPTaTnlePIV335500W. The BLUETTI ...

lang:en **score:15** filesize: 13.04 M page_count: 28 document date: 2025-02-07



[\[pdf\]](#)


Untitled EVENTS Undertwok Oct 31 2024 · We re your springboard into sustainable self generated

energy But this revolution isn t just about fancy tech and flashy gadgets It s about WINTER Digital Final srsltid AfrmBOoq9NCQbOqY4LEI5HqiK9ZzE8rTG7NSySIFHm GO8jhLvPgSyXaT undertwok 10 |||

THE ADDRESS: 201 WOKINGHAM ROAD RG6 7DT - TEL: 07506 881636 -

WEBSITE: UNDERTWOK.COM reading s best ... from low to high power, such as a mini-fridge, air pump, and TV. JACKERY EXPLORER 240 V2 JACKERY **EXPLORER 300 PLUS** BLUETTI AC 2P 5 SOPLOARRTPAABNLEELS SoBlaLUr EPTaTnlePIV335500W. The BLUETTI PV...


lang:en **score:14** filesize: 10.16 M page_count: 13 document date: 2024-10-30

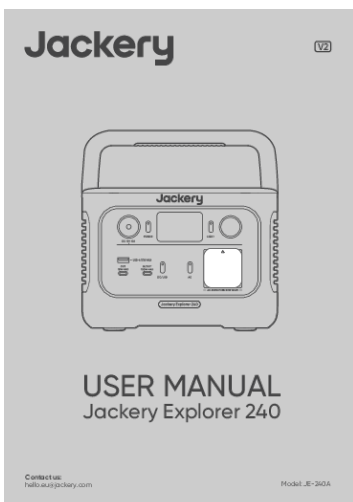

[\[pdf\]](#) User Manual Specifications Dimension Guide

V2 USER MANUAL Jackery Explorer 240 Contact us: hello.eu jackery.com Model: JE-240A CONTENTS GB ... riode de garantie Garantie standard de 3 ans : La priode de la garantie standard du produit Jackery **Explorer 300 Plus** est de 36 mois. Dans chaque cas, la priode de garantie est mesure compter de la d...

lang:en **score:12** filesize: 14.78 M page_count: 63 document date: 2024-01-15

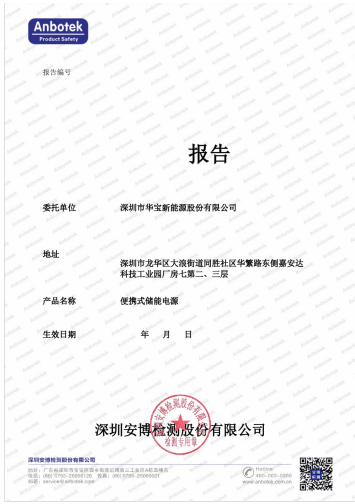

[pdf] Safety Datasheet

MSDS REPORT Jackery Explorer 300 Plus Sample model JE 300B Rating Battery Nominal Voltage 12.8V Rated sicherheitsdatenblatt 3338575 jackery explorer plus powerstation lifepo 4 schwarz orange mit ladereglerasset conrad media10 add 160267 c1 en 003338575SD00 sicherheitsdatenblatt laderegler |||

...

lang:en score:10 filesize: 562.47 K page_count: 11 document date: 2023-12-12