



Manuals.plus /

- › X-Sense /
- › X-Sense SSC0A Outdoor Security Camera User Manual

## X-Sense SSC0A

# X-Sense SSC0A Outdoor Security Camera User Manual

Model: SSC0A

## INTRODUCTION

---

Thank you for choosing the X-Sense SSC0A Outdoor Security Camera. This manual provides essential information for the proper installation, operation, and maintenance of your device. This camera is designed for outdoor surveillance, featuring solar power, a 5000 mAh battery, Wi-Fi connectivity, motion detection, color night vision, two-way audio, cloud storage options, spotlights, and IP65 weather resistance. Please read this manual thoroughly before use and retain it for future reference.

## PACKAGE CONTENTS

---

Ensure all items are present and in good condition. If any items are missing or damaged, please contact customer support.

- 1 x X-Sense SSC0A Security Camera
- 1 x Solar Panel
- 1 x Type-C Cable
- 1 x User Manual (this document)
- Mounting Screws and Anchors

## PRODUCT OVERVIEW

---

The X-Sense SSC0A is a versatile outdoor security camera designed for reliable surveillance. Key features include:

- **Solar Power with 5000 mAh Battery:** Provides continuous power, reducing the need for frequent recharging.
- **1080p HD Video:** Delivers clear and sharp live view and recordings.
- **Color Night Vision:** Integrated spotlights enable full-color video even in low-light conditions, complemented by infrared LEDs for black and white night vision.
- **AI Smart Detection:** Accurately identifies objects like people, pets, or packages, minimizing false alerts.
- **Two-Way Audio:** Allows for real-time communication through the camera.
- **IP65 Weatherproof:** Built to withstand various outdoor weather conditions.
- **Dual Storage Options:** Supports local SD card storage (up to 128 GB, card not included) and secure cloud storage.

- **Multi-User Sharing:** Allows multiple users to access and monitor the camera feed via the X-Sense app.



Image: The X-Sense SSC0A camera connected to its solar panel, highlighting its solar charging capability and wireless setup.

## SETUP

---

### 1. Charging the Camera

Before initial use, fully charge the camera's internal 5000 mAh battery using the provided Type-C cable. Connect the cable to the camera and a standard USB power adapter (not included). The charging indicator light will show the charging status.

### 2. App Installation and Account Creation

Download the "X-Sense" app from your smartphone's app store (iOS or Android). Follow the on-screen instructions to create an account and log in.

### 3. Adding the Camera to the App

1. Open the X-Sense app and tap the "+" icon to add a new device.
2. Select the SSC0A camera model from the list.
3. Follow the in-app instructions to connect the camera to your Wi-Fi network. Ensure your Wi-Fi signal is strong at the installation location.
4. Scan the QR code displayed on your phone with the camera lens.
5. Once connected, name your camera and complete the setup process.

### 4. Mounting the Camera and Solar Panel

Choose a suitable outdoor location for the camera and solar panel. The camera is IP65 weatherproof, allowing for flexible placement.

- **Camera Placement:** Mount the camera at a height that provides optimal viewing coverage and motion detection. Use the provided screws and anchors to secure the camera mount to a wall or ceiling. The camera mount is adjustable for various angles.
- **Solar Panel Placement:** Position the solar panel in an area that receives direct sunlight for most of the day to ensure continuous charging. The solar panel cable is 2.8 meters long, allowing for flexible positioning relative to the camera. Connect the solar panel to the camera's charging port.

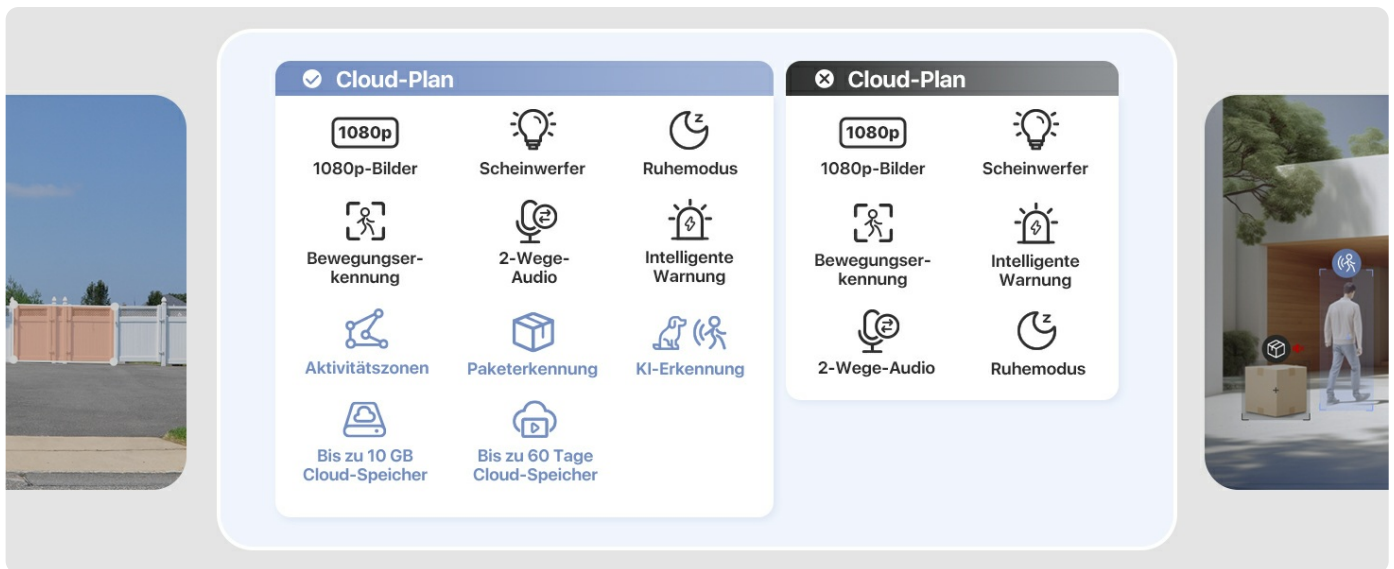


Image: A person adjusting the X-Sense SSC0A camera, demonstrating its flexible mounting and 360-degree adjustability.

## OPERATING INSTRUCTIONS

### 1. Live View and Two-Way Audio

Open the X-Sense app and select your camera to access the live 1080p HD video feed. Use the microphone icon in the app to enable two-way audio, allowing you to speak through the camera and hear responses.



Image: A smartphone showing the live feed from the camera with a delivery person, illustrating the two-way audio feature.

### 2. Motion Detection and Alerts

The camera features intelligent AI detection to identify people, pets, and packages. When motion is detected, you will receive real-time push notifications on your smartphone.

- **Customizable Notifications:** Adjust notification settings in the app to receive alerts for specific object types, minimizing unnecessary interruptions.
- **Activity Zones:** Define specific areas within the camera's view where motion detection should be active, ignoring other areas. This helps focus surveillance on critical zones.
- **Quiet Mode:** Schedule specific times or dates when motion alerts should be suppressed to avoid unwanted notifications.

## Müheleose Einrichtung in allen Winkeln

Diese kabellose Kamera lässt sich in wenigen Minuten mit einem 2,8 m langen, ausziehbaren Solarmodulkabel einrichten und flexibel platzieren.



Image: The camera detecting a person at night, with a spotlight illuminating the scene and a smartphone displaying a real-time motion alert.

### 3. Night Vision

The SSC0A camera offers two night vision modes:

- **Color Night Vision:** Activated by the built-in spotlights, providing detailed, full-color video in low-light conditions.
- **Infrared Night Vision:** Uses infrared LEDs for clear black and white video in complete darkness.

## Sicherheit, die Sie sehen können

Diese Kamera erstellt dank eines ultrahellen LED-Strahler auch nachts detaillierte, vollfarbige Videos von Ihrem Haus und Garten.



Image: A visual comparison demonstrating the camera's 1080p HD color night vision with spotlights on versus standard black and white night vision.

### 4. Video Storage and Playback

Recorded videos can be stored locally or in the cloud.

- **Local Storage:** Insert a Micro SD card (up to 128 GB, not included) into the camera's SD card slot for local video storage.
- **Cloud Storage:** The X-Sense app offers secure cloud storage options, including a free 3-day video history. Subscription plans are available for extended storage.
- **Playback:** Access, review, and download recorded videos through the X-Sense app. The app allows for smart and fast playback, categorizing events by people, pets, or packages.



Image: The camera with an inserted Micro SD card, highlighting both local (up to 128GB) and cloud storage options, including a free 3-day video history.

## 5. Multi-User Sharing

You can grant access to your camera feed to multiple users through the X-Sense app, allowing family members or trusted individuals to monitor the property.

## MAINTENANCE

- **Cleaning:** Periodically clean the camera lens and solar panel with a soft, damp cloth to ensure optimal performance. Avoid abrasive cleaners.
- **Battery Care:** While the solar panel provides continuous charging, ensure the camera receives sufficient sunlight. In prolonged periods of low sunlight, the battery may require manual charging via the Type-C port.
- **Firmware Updates:** Regularly check the X-Sense app for available firmware updates to ensure your camera has the latest features and security enhancements.



Image: The camera enduring rain, demonstrating its IP65 weatherproof design and operational temperature range (-10°C to 45°C).

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Camera not connecting to Wi-Fi	Weak Wi-Fi signal, incorrect password, camera too far from router.	Ensure strong Wi-Fi signal at camera location. Verify Wi-Fi password. Move camera closer to router or use a Wi-Fi extender. Restart camera and router.
No motion detection alerts	Motion detection disabled, sensitivity too low, activity zones not set correctly, app notifications blocked.	Enable motion detection in the app. Adjust sensitivity. Check activity zone settings. Ensure app notifications are allowed in phone settings.
Poor video quality	Dirty lens, poor Wi-Fi connection, low light conditions.	Clean the camera lens. Ensure a stable Wi-Fi connection. Verify night vision settings are appropriate for the environment.
Battery not charging	Solar panel not receiving enough sunlight, faulty cable, extreme temperatures.	Relocate solar panel to an area with direct sunlight. Check cable connections. Charge manually via Type-C if needed. Ensure operating within specified temperature range.
Cannot view images or change settings in app	App glitch, camera offline, firmware issue.	Restart the app and camera. Check camera's internet connection. Ensure app and camera firmware are up to date. If issues persist, contact support.

## SPECIFICATIONS

Feature	Detail
Model Number	SSC0A
Power Source	Solar Powered, 5000 mAh Lithium Metal Battery (included)
Connectivity Technology	Wireless (Wi-Fi)
Video Capture Resolution	1080p
Optical Sensor Technology	CMOS
Night Vision Range	7 Meters
Night Vision Type	Color Night Vision (with spotlight), Infrared (B&W)
Special Features	Two-Way Audio, Motion Detection, Spotlights
Indoor/Outdoor Use	Outdoor
Water Resistance Level	IP65 (Waterproof)
Max Flash Memory Supported	128 GB (Micro SD card)
Product Dimensions	20 x 15 x 11 cm
Item Weight	232 Grams
Material	ABS Plastic
Control Method	Application (X-Sense App)

## WARRANTY AND SUPPORT

X-Sense products come with a standard manufacturer's warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official X-Sense website.

For technical support, troubleshooting assistance, or any inquiries regarding your X-Sense SSC0A camera, please contact X-

Sense customer support through their official website or the contact information provided in the app.

**X-Sense Official Website:** [www.x-sense.com](http://www.x-sense.com)