

[Manuals.plus](#) /

› [Yeego](#) /

› Yeego 24-Inch Dual Zone 52-Bottle Wine Fridge Cooler Instruction Manual

Yeego B0GC5GFY6L

Yeego 24-Inch Dual Zone 52-Bottle Wine Fridge Cooler Instruction Manual

Model: B0GC5GFY6L

1. IMPORTANT SAFETY INFORMATION

Read all instructions before using this appliance to reduce the risk of fire, electric shock, or injury. Keep this manual for future reference.

- Ensure the appliance is properly grounded.
- Do not operate the appliance with a damaged power cord or plug.
- Do not allow children to play with or inside the appliance.
- Unplug the appliance before cleaning or performing maintenance.
- Keep ventilation openings clear of obstructions.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

2. PRODUCT OVERVIEW

The Yeego 24-inch dual zone wine fridge cooler is designed to store up to 52 standard Bordeaux bottles at optimal temperatures. It features two independent temperature zones, adjustable wooden shelves, and a quiet compressor cooling system.



Figure 2.1: Overall view of the Yeego 24-inch Dual Zone Wine Fridge Cooler.

Key Features:

- **Dual Temperature Zones:** Independent temperature control for upper and lower sections (40-65°F).
- **Capacity:** Holds up to 52 standard Bordeaux bottles.
- **Adjustable Wood Shelves:** 5 removable beech wood shelves for flexible storage.
- **Quiet Compressor:** Low vibration and energy-efficient cooling.
- **Double-Layer Tempered Glass Door:** UV protection and temperature stability.
- **Power-Outage Memory:** Restores previous temperature settings after power interruption.
- **Built-in or Freestanding Installation:** Versatile placement options.



Figure 2.2: Product dimensions: 22.4"D x 23.4"W x 32.3"H.

3. SETUP & INSTALLATION

3.1 Unpacking

1. Carefully remove all packaging materials, including the foam base and any tape securing the doors.
2. Inspect the appliance for any shipping damage. Report any damage to the retailer immediately.
3. Remove all internal packing materials, including shelves and accessories.

3.2 Placement

This wine cooler can be installed as a freestanding unit or built into cabinetry.

- Ensure adequate ventilation around the unit, especially at the front grille.
- Avoid placing the unit in direct sunlight or near heat sources.
- Maintain a minimum clearance of 1 inch (2.5 cm) at the back and sides for proper air circulation.

After sales service



360° Protective Packaging



Secure Package Delivery



Expert After-Sales Support

Figure 3.1: Examples of freestanding and built-in installation.

3.3 Leveling the Appliance

The appliance must be level for proper operation. Use the adjustable leveling feet at the bottom of the unit to achieve a stable and level position.



Figure 3.2: Adjustable leveling feet for stability.

3.4 Initial Power-On

After placement, allow the appliance to stand upright for **24 to 36 hours** before plugging it into a power outlet. This allows the refrigerant to settle, ensuring optimal cooling performance.

3.5 Door Handle Installation

To install the door handle:

1. Locate the screws and handle in the packaging.
2. Gently press the rubber gasket towards the outside of the door to reveal the screw holes.
3. Align the handle with the screw holes and secure it with the provided screws. Do not overtighten.

Your browser does not support the video tag.

Video 3.1: Demonstration of built-in installation and handle attachment.

4. OPERATING INSTRUCTIONS

4.1 Control Panel

The control panel is located at the top interior of the unit, allowing for easy temperature adjustments and light control.



Figure 4.1: Diagram of the digital touch temperature control panel.

- **Power Button:** Turns the unit On/Off.
- **Light Button:** Controls the interior blue LED lighting.
- **Temperature Display:** Shows the current temperature in each zone.
- **Temp +/- Buttons:** Adjusts the temperature for the selected zone.

4.2 Setting Temperature

This unit features dual temperature zones. The upper zone is typically for white wines (cooler), and the lower zone for red wines (warmer).

1. Press the 'Temp +/-' buttons for the desired zone (Upper or Lower) to adjust the temperature.
2. The temperature range for both zones is 40-65°F (5-18°C).
3. The display will flash while adjusting and then show the current temperature once set.

Your browser does not support the video tag.

Video 4.1: Demonstration of temperature control and bottle placement.

4.3 Power-Outage Memory

In the event of a power interruption, the unit will automatically restore the previously set temperature settings once power is resumed, preventing quality degradation of your stored items.

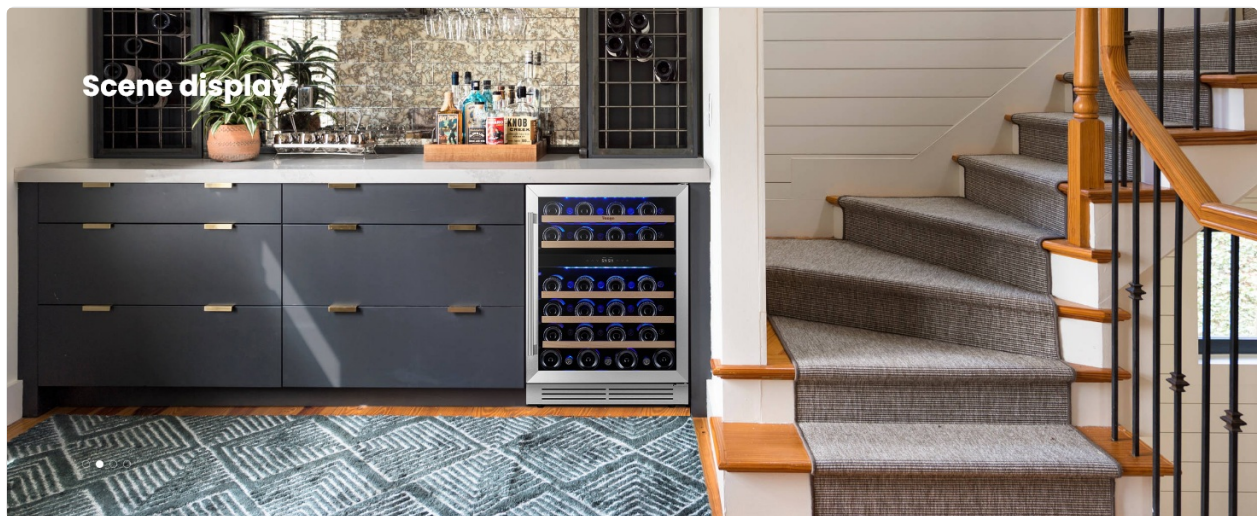


Figure 4.2: Illustration of the power-outage memory feature and digital touch control.

4.4 Adjustable Shelves

The 5 beech wood shelves are removable and adjustable to accommodate various bottle sizes. To adjust or remove a shelf, gently slide it out. The snap-in rail design prevents accidental slippage.

Adjustable shelves – beechwood & certified by FSC

Friendly to the environment

- 5 shelves with freely
- Snap – in rail design prevents accidental slippage.



Figure 4.3: Adjustable beechwood shelves and bottle capacity.

5. MAINTENANCE

5.1 Cleaning

Regular cleaning helps maintain the appearance and efficiency of your wine cooler.

- **Exterior:** Clean the stainless steel door frame and exterior surfaces with a soft cloth and mild detergent. Avoid abrasive cleaners.
- **Interior:** Wipe the interior with a soft cloth dampened with a solution of baking soda and water.
- **Shelves:** The wood shelves can be wiped clean with a damp cloth. Ensure they are dry before placing bottles back.
- **Door Gasket:** Clean the door gasket regularly to ensure a proper seal.

5.2 Defrosting

This unit features manual defrost. If ice buildup occurs, unplug the unit and allow the ice to melt naturally. Place towels at the bottom to absorb water. Once defrosted, wipe the interior dry before plugging the unit back in.

5.3 Carbon Purification System

The internal carbon purification system helps eliminate odors and keeps the interior fresh. Replace the carbon filter periodically as recommended by the manufacturer (check product packaging or contact support for replacement schedule).

6. TROUBLESHOOTING

If you encounter issues with your wine cooler, refer to the following common problems and solutions. If the problem persists, contact customer support.

Problem	Possible Cause	Solution
Unit does not operate	No power, tripped circuit breaker, power cord unplugged.	Check power supply, reset breaker, ensure plug is secure.
Temperature is not cold enough	Door not closed properly, excessive door openings, unit overloaded, poor ventilation, ambient temperature too high.	Ensure door is sealed, reduce door openings, do not overload, check clearances, move unit to cooler location.
Unit is noisy	Unit not level, items vibrating against each other, normal compressor operation.	Adjust leveling feet, rearrange bottles, note that some compressor noise is normal.
Water on floor	Drain tube clogged, high humidity.	Clear drain tube, this is normal in high humidity.

7. SPECIFICATIONS

Feature	Detail
Model Number	B0GC5GFY6L
Product Dimensions (D x W x H)	22.4" x 23.4" x 32.3"
Capacity	52 Bottles (Standard Bordeaux) / 5.12 Cubic Feet
Temperature Range	40-65°F (5-18°C)
Cooling Method	Compressor

Feature	Detail
Defrost System	Manual Defrost
Number of Shelves	5 Wood Shelves
Installation Type	Built-In & Freestanding
Noise Level	41-43 dB

8. WARRANTY & SUPPORT

Yeego provides the following warranty for this product:

- **1-Year Warranty:** On the entire machine.
- **3-Year Warranty:** On the compressor.

For installation assistance, troubleshooting, or any other inquiries, please contact our customer support team. Our support team is available 24/7.

Contact information can be found on the official Yeego website or your purchase documentation.