

Edifier WH700NB

Edifier WH700NB Wireless Active Noise Cancellation Over-Ear Headphones User Manual

Model: WH700NB | Brand: Edifier

INTRODUCTION

This manual provides detailed instructions for the Edifier WH700NB Wireless Active Noise Cancellation Over-Ear Headphones. Please read this manual thoroughly before using the product to ensure proper operation and to maximize your listening experience. The WH700NB headphones feature Bluetooth 5.3 connectivity, active noise cancellation, dual device connection, and a long-lasting battery.



Image: Edifier WH700NB headphones, black, showcasing their over-ear design.

PACKAGE CONTENTS

The Edifier WH700NB package typically includes:

- Edifier WH700NB Headphones
- USB-C Charging Cable
- User Manual

Note: Specific contents may vary. Please check the product packaging for exact details.

SETUP

1. Charging the Headphones

Before first use, fully charge the headphones. Connect the supplied USB-C cable to the charging port on the headphones

and the other end to a USB power adapter (not included) or a computer's USB port.

- A full charge takes approximately 1.5 hours.
- A 10-minute charge provides approximately 8 hours of playback.
- The LED indicator will show charging status.



Image: Visual representation of the Edifier WH700NB's battery performance, highlighting quick charge and extended playback times.

2. Bluetooth Pairing

1. Ensure the headphones are charged.
2. Press and hold the Power button for 3 seconds to turn on the headphones. The LED indicator will flash blue rapidly, indicating pairing mode.
3. On your device (smartphone, tablet, computer), enable Bluetooth and search for available devices.
4. Select "EDIFIER WH700NB" from the list of found devices.
5. Once connected, the LED indicator will glow solid blue.

3. Dual Device Connection

The WH700NB headphones support simultaneous connection to two Bluetooth devices.

1. Connect the headphones to the first device as described in the Bluetooth Pairing section.
2. After successful connection, disable Bluetooth on the first device. The headphones will re-enter pairing mode.
3. Connect the headphones to the second device.
4. Re-enable Bluetooth on the first device. The headphones should automatically connect to both devices.
5. You can now switch between audio sources from either connected device.



Image: Edifier WH700NB headphones positioned between a laptop and a smartphone, illustrating the dual device connection capability.

OPERATING INSTRUCTIONS

Controls Overview

The headphones feature intuitive button controls for various functions. Refer to the diagram below for button locations and

their corresponding actions.

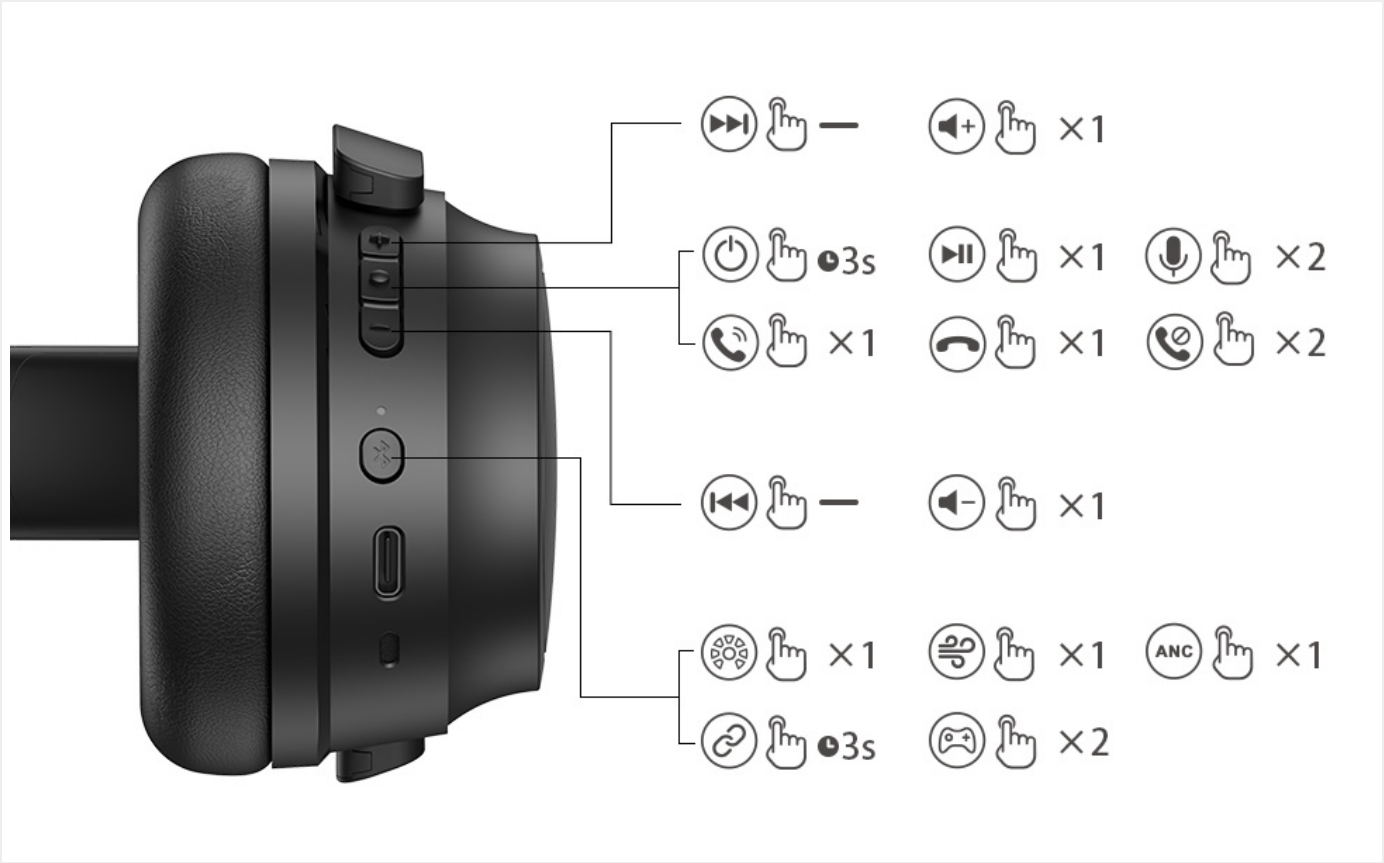


Image: Detailed diagram illustrating the control buttons on the Edifier WH700NB headphones and their respective functions.

Button Functions

Button/Action	Function
Power Button (Press 3s)	Power On/Off
Power Button (Press 1x)	Play/Pause Music
Power Button (Press 2x)	Activate Voice Assistant
Volume Up (+) (Press 1x)	Increase Volume
Volume Up (+) (Hold)	Next Track
Volume Down (-) (Press 1x)	Decrease Volume
Volume Down (-) (Hold)	Previous Track
ANC Button (Press 1x)	Cycle ANC Modes (ANC On / Ambient Sound / ANC Off)
Call Button (Press 1x)	Answer/End Call
Call Button (Press 2x)	Reject Call
Call Button (Press 3s)	Switch to Game Mode

Active Noise Cancellation (ANC) and Ambient Mode

The WH700NB headphones offer three noise control modes:

- **ANC On:** Reduces external noise for an immersive audio experience.

- **Ambient Sound:** Allows you to hear your surroundings while still enjoying your audio, useful for awareness in public spaces.
- **ANC Off:** Standard headphone operation without noise cancellation.

Press the ANC button to cycle through these modes.


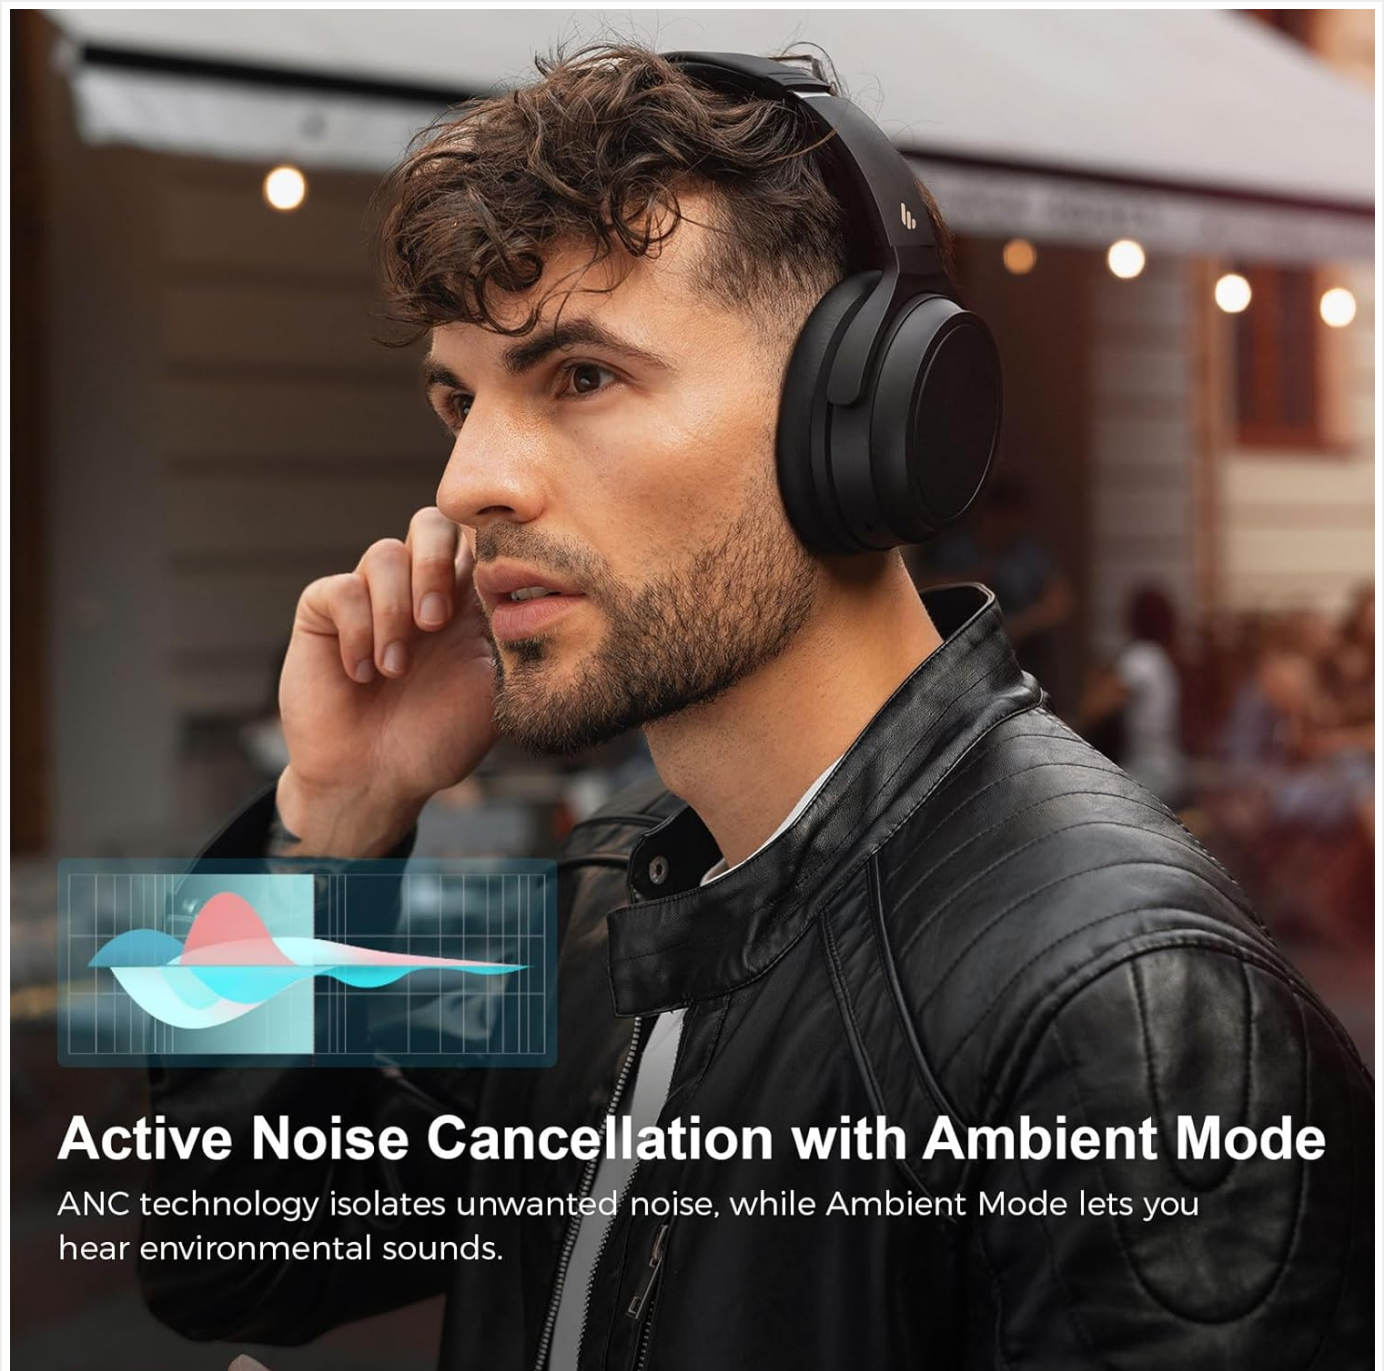


Image: A user demonstrating the Active Noise Cancellation feature of the Edifier WH700NB headphones, with a visual representation of sound wave cancellation.

Call Functions

The integrated microphone with DNN noise cancellation ensures clear communication during calls.

- **Answer/End Call:** Press the Call button once.
- **Reject Call:** Press the Call button twice.
- **Voice Assistant:** Press the Power button twice to activate your device's voice assistant.

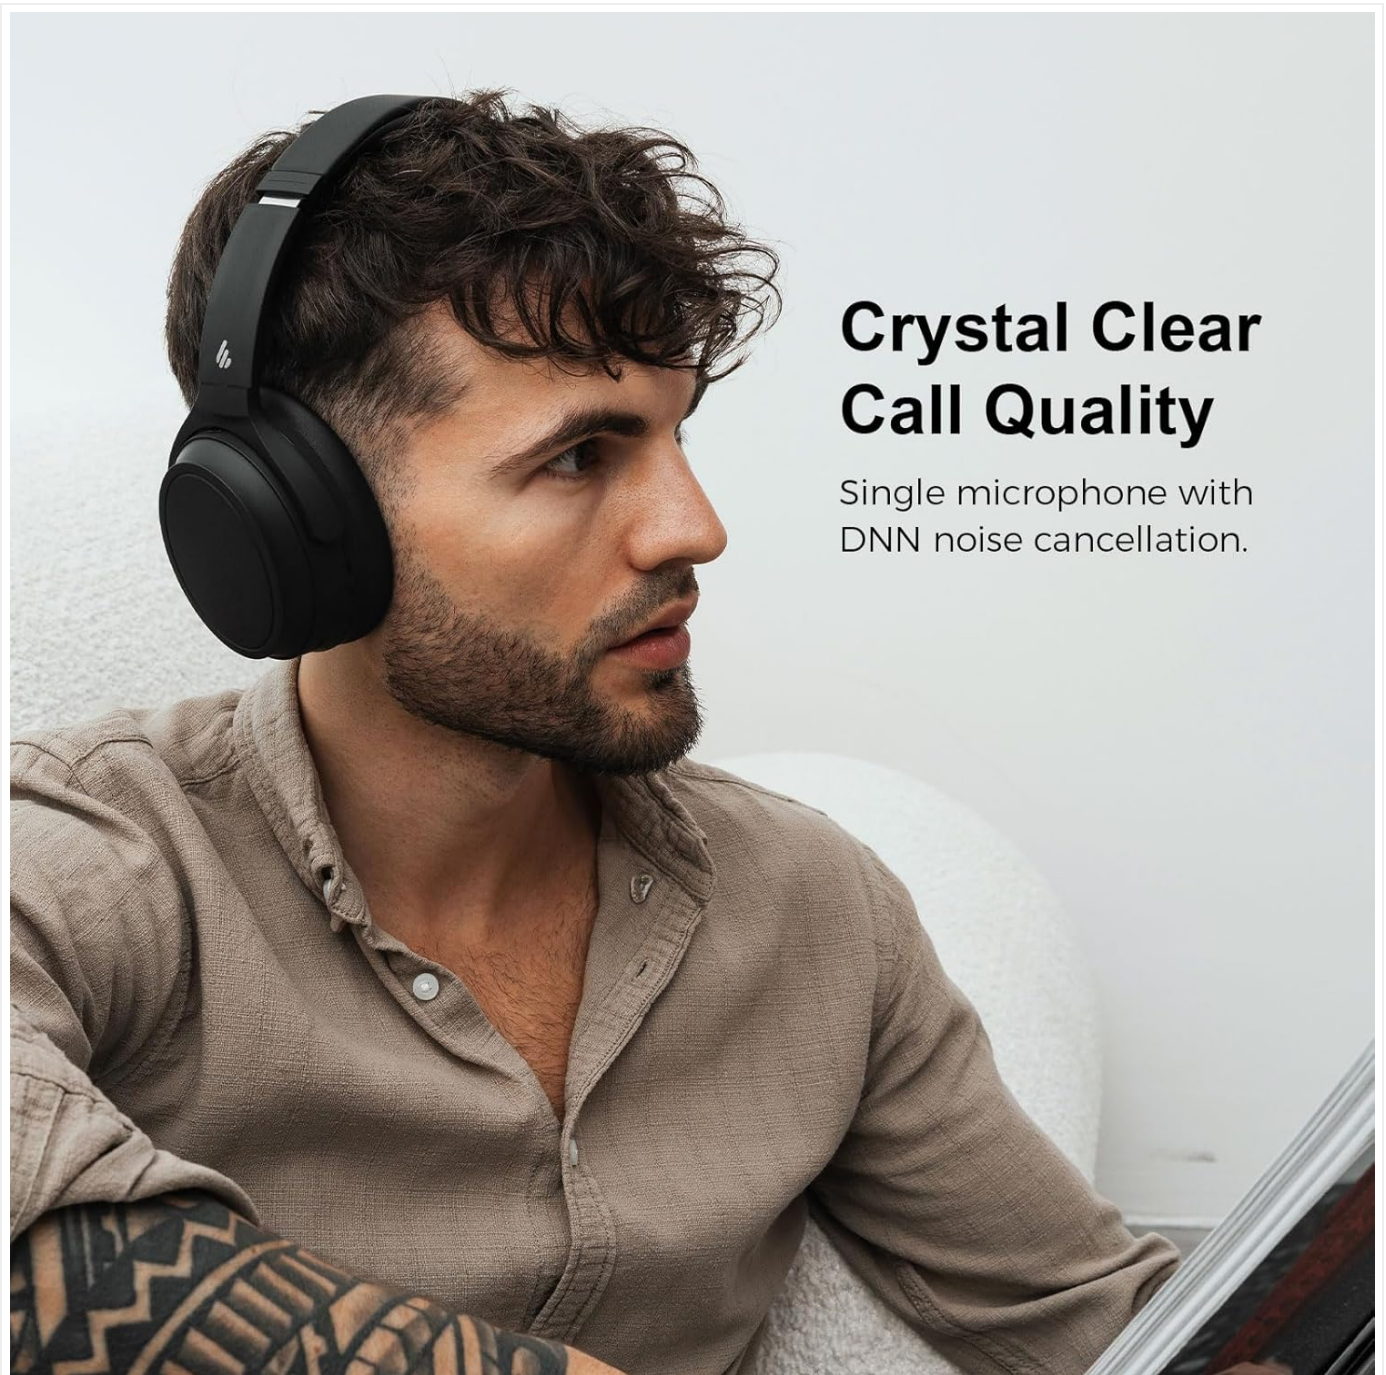

Crystal Clear Call Quality

Single microphone with DNN noise cancellation.

Image: A user engaged in a call while wearing the Edifier WH700NB headphones, emphasizing the clarity of communication.

Game Mode

Activate Game Mode for ultra-low latency (0.08s) during gaming sessions, providing synchronized audio and visuals.

- **Activate Game Mode:** Press and hold the Call button for 3 seconds.
- Repeat the action to exit Game Mode.

Edifier Connect App

For enhanced control and customization, download the Edifier Connect App from your device's app store. The app allows you to:

- Adjust sound settings and equalizer presets.
- Customize button functions.
- Check battery status.
- Update firmware.



Image: A smartphone displaying the Edifier Connect App interface, showing various settings and controls for the headphones.

MAINTENANCE

Cleaning

- Wipe the headphones with a soft, dry cloth.
- Do not use abrasive cleaners, solvents, or chemical sprays.
- Avoid getting moisture into the ports or speaker grilles.

Storage

- Store the headphones in a cool, dry place away from direct sunlight and extreme temperatures.
- When not in use, fold the headphones to save space and protect them.

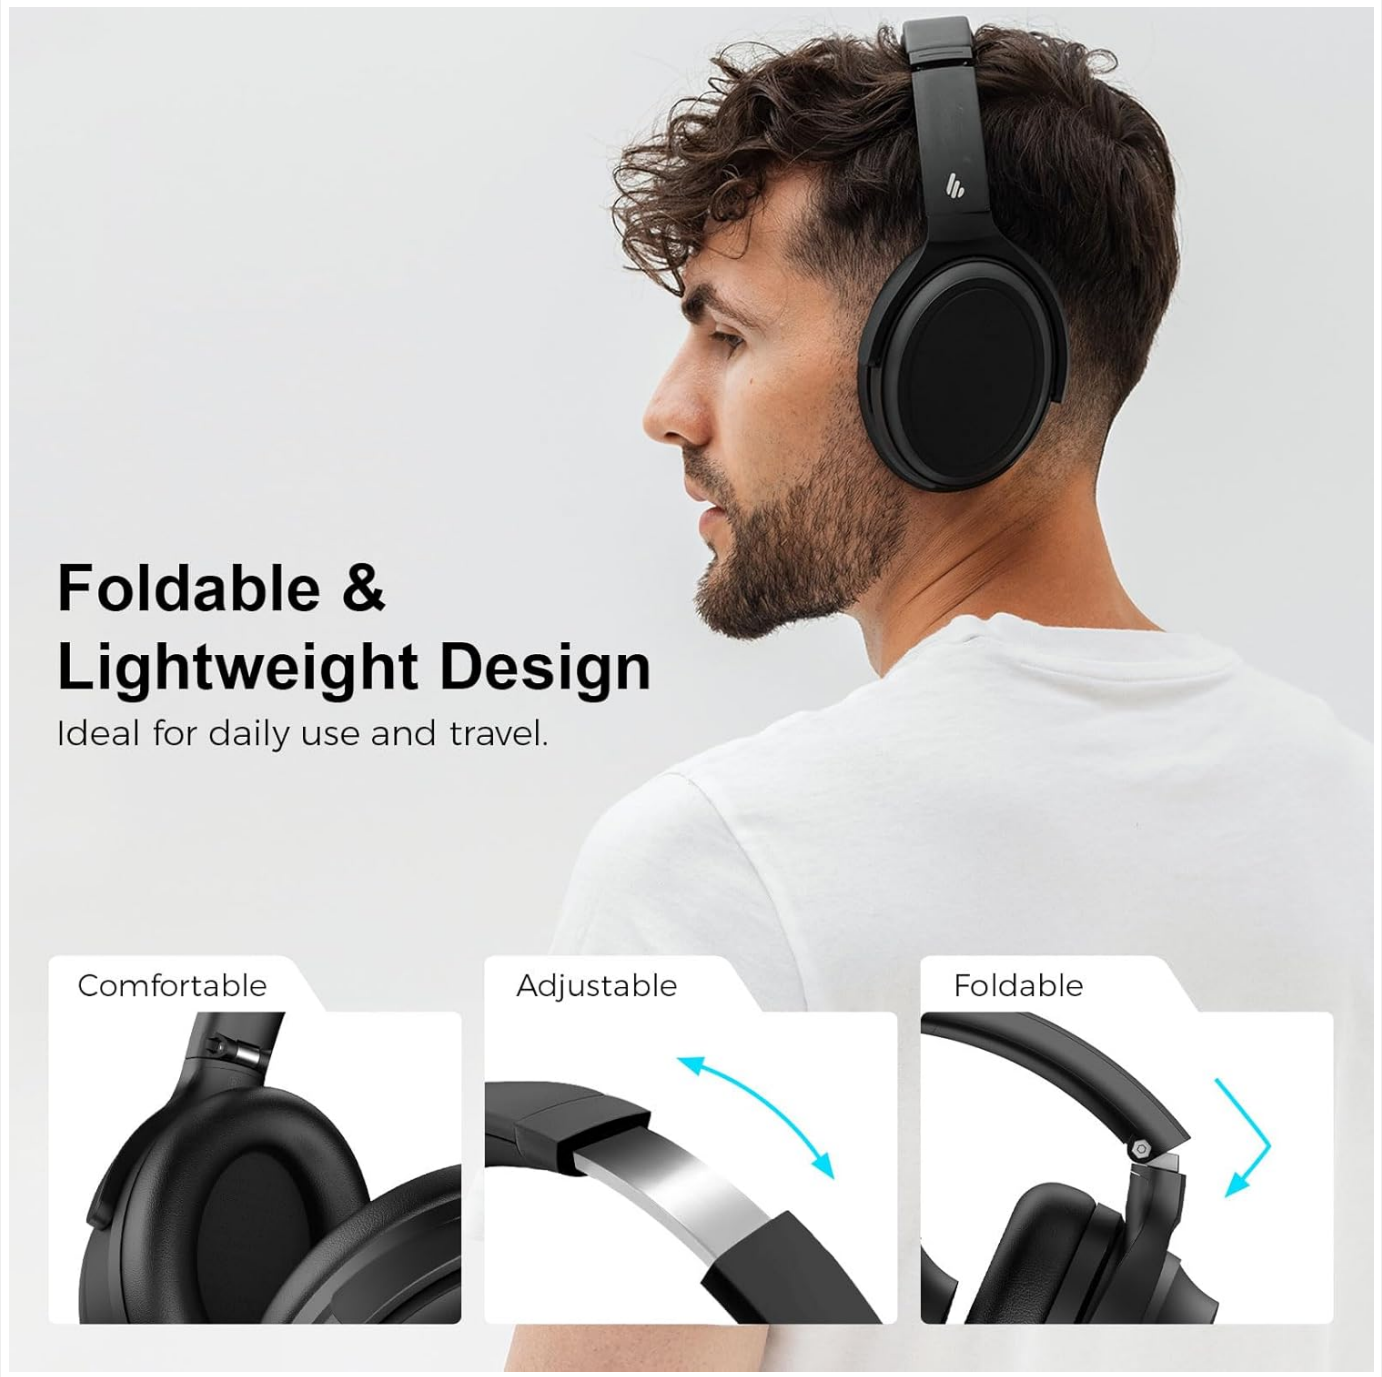


Image: The Edifier WH700NB headphones shown in their folded state, emphasizing their portable and lightweight design.

Battery Care

- Charge the headphones regularly, even if not used frequently, to maintain battery health.
- Avoid fully discharging the battery for extended periods.

TROUBLESHOOTING

Common Issues and Solutions	
Problem	Solution
Cannot power on	Ensure the headphones are charged. Connect to a power source and try again.

Problem	Solution
Cannot pair via Bluetooth	Ensure headphones are in pairing mode (LED flashing blue). Disable and re-enable Bluetooth on your device. Move headphones closer to your device. Clear previous Bluetooth connections on your device and try pairing again.
No sound	Check volume levels on both headphones and connected device. Ensure headphones are correctly paired and connected. Try playing audio from a different application or device.
Poor call quality	Ensure the microphone is not obstructed. Move to a quieter environment. Check network signal strength on your phone.
ANC not effective	Ensure ANC mode is activated. Check that the earcups form a good seal around your ears.

SPECIFICATIONS

Feature	Detail
Model	WH700NB
Bluetooth Version	5.3
Bluetooth Range	Up to 10 meters
Audio Driver Type	Dynamic Driver
Frequency Response	20Hz - 20KHz
Battery Life (ANC Off)	Up to 68 hours
Battery Life (ANC On)	Up to 45 hours
Charging Time	Approx. 1.5 hours (10 min charge for 8 hrs playback)
Audio Latency (Game Mode)	0.08 seconds (80ms)
Noise Control	Active Noise Cancellation
Microphone	Single MIC with DNN Noise Cancellation
Connectivity	Wireless (Bluetooth 5.3), USB-C for charging
Weight	Approx. 13.7 ounces (0.39 kg)
Dimensions	6.71 x 4.43 x 4.04 inches
Material	Plastic

WARRANTY AND SUPPORT

Edifier products are designed and manufactured to the highest quality standards. For warranty information, technical support, or service inquiries, please refer to the warranty card included with your product or visit the official Edifier website. Keep your proof of purchase for warranty claims.

Edifier Official Website: www.edifier.com



Related Documents - WH700NB

--	--



Wireless Over-Ear Headphones with Active Noise Cancellation
Model: P0F300168

— Manual — (BC)

BC



Press and hold the power button to power on/off

—



1. Once powered on, the headphones will automatically enter Bluetooth pairing mode.
2. Select "EDIFIER WH700NB Pro" in your device settings to connect.

—



1. In ON state, press and hold the "⓪" button for about 3 seconds to enter Bluetooth pairing mode.
2. Select "EDIFIER WH700NB Pro" in your device settings to connect.

—



1. Pair device A with the headphones successfully.
 2. Press and hold the **⓪** button for 3 seconds to re-enter Bluetooth pairing mode, and then select "EDIFIER WH700NB Pro" in device B settings to connect.
 3. Select "EDIFIER WH700NB Pro" again in device A settings to connect.
- Note: For subsequent use, the headphones will automatically reconnect to the last device used.

—

x1b
—b
x1b
x1b

Diagram illustrating the connection of three input lines (x1, x2, and a minus sign) to a single input on a device.

—



In ON state, press "+" and "-" buttons for 5s to finish reset, then headphones will automatically enter Bluetooth pairing mode if no pairing device is connected.

—



Input: 5V @ 1A.

Connect the headphones to a power source via the USB-C cable for charging.

1. Make sure the USB-C port is completely dry before charging.
2. When charging with a USB-C cable, the product is used as wired headphones and Bluetooth functions are unavailable.

1



Connect to the headphones via the USB-C cable. Wired listening will automatically disable Bluetooth mode.



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual



EN 1. Power ON/OFF



- Press the power button for 3s to turn the headphones on. The power button will light up.
- Press the power button for 3s to turn the headphones off. The power button will light up.

Note:
1. When there is no Bluetooth connection, the headphones will power on/off automatically.
2. When there is a Bluetooth connection, the headphones will power on/off automatically.
3. When there is a Bluetooth connection, the headphones will power on/off automatically.

2. Pairing



- Pairing for the first time**
- Press the power button for 3s to turn the headphones on. The power button will light up.
 - Press the power button for 3s to turn the headphones on. The power button will light up.

- Pairing for new device**
- Press the power button for 3s to turn the headphones on. The power button will light up.
 - Press the power button for 3s to turn the headphones on. The power button will light up.

Note:
The headphones will automatically connect to the device last time.

3. Reset



- Press and hold the "P" and "M" keys simultaneously for about 5s when the headphones are powered on. The power button will light up.

4. Dual-device connection

- Press the power button for 3s to turn the headphones on. The power button will light up.
- Press the power button for 3s to turn the headphones on. The power button will light up.

5. Charging



- Press the power button for 3s to turn the headphones on. The power button will light up.
- Press the power button for 3s to turn the headphones on. The power button will light up.

Note:
Please do not charge the headphones when there is liquid or other liquids inside the charging port, which may damage the headphones.

6. Controls



- Note:**
1. Press and hold the "P" and "M" keys simultaneously for about 5s when the headphones are powered on. The power button will light up.

For more information, please visit our website

www.edifier.com



Model: WH700NB
©2023 Edifier International Limited. All rights reserved.
Printed in China

Edifier
For the need of technical improvement and system upgrade, information
updated frequently may be subject to change from time to time without prior
notice.
Products of Edifier will be customized for different applications. Pictures and
descriptions shown in this manual may be slightly different from actual products.
If any difference is found, the actual products prevail.

Edifier WH700NB Wireless Noise Cancellation Headphones User Manual

This manual provides instructions for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, resetting, dual-device connection, charging, and controls.



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual



EN 1. Power ON/OFF



- Press the power button for 3s to turn the headphones on.
- Press the power button for 3s to turn the headphones off.

Note:
If there is no Bluetooth connection when the headphones are powered on, but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.
If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

2. Pairing



- Pairing for the first time**
- Press the power button for 3s to turn the headphones on.
 - Press the power button for 3s to turn the headphones off.

- Pairing for new device**
- Press the power button for 3s to turn the headphones on.
 - Press the power button for 3s to turn the headphones off.

Note:
The headphones will automatically connect to the device last time.

3. Reset



- Press and hold the "P" and "M" keys simultaneously for 5s when the headphones are powered on. The headphones will reset and return to the default state.

4. Dual-device connection

- Turn on the headphones.
- Press the power button for 3s to turn the headphones on.
- Press the power button for 3s to turn the headphones off.

Note:
The headphones will automatically connect to the device last time.

5. Charging



- Place the headphones in the charging case.
- Press the power button for 3s to turn the headphones on.

Note:
Please do not charge the headphones when there is liquid on the charging port, which may damage the headphones.

6. Controls



- Note:**
1. Press and hold the "P" key to turn the headphones on.- Press and hold the "M" key to turn the headphones off.

For more information, please visit our website:

www.edifier.com



Model: WH700NB
©2023 Edifier International Limited
Printed in China

Edifier
For the need of technical improvement and system upgrade, information
updated frequently may be subject to change from time to time without prior
notice.
Products of Edifier will be customized for different applications. Pictures and
descriptions shown in this manual may be slightly different from actual product.
If any difference is found, the actual product prevails.

Edifier WH700NB Wireless Noise Cancellation Headphones Manual

User manual for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, reset, dual-device connection, charging, and controls.

WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual

EN 1. Power ON/OFF



1. Press the power button for 3s to turn the headphones on.
2. Press the power button for 3s to turn the headphones off.

Note:
1. When in a Bluetooth connection, the headphones will power on automatically when the power button is pressed.
2. When in a Bluetooth connection, the headphones will power off automatically when the power button is pressed for 3s.

2. Pairing



Pairing for the first time
1. Press the pairing button for 3s to enter the pairing mode.
2. Press the power button for 3s to turn the headphones on.

Pairing for new device
1. Press the pairing button for 3s to enter the pairing mode.
2. Press the power button for 3s to turn the headphones on.

Note:
The headphones will automatically connect to the last paired device when powered on.

3. Reset



Press and hold the "B" and "M" buttons for 5s to reset the headphones. The headphones will enter the pairing mode and the LED indicator will flash red and blue.

4. Dual-device connection

1. Press the Bluetooth button on the headphones to enter the pairing mode.
2. Press the power button for 3s to turn the headphones on.

Note:
The headphones will automatically connect to the last paired device when powered on.

Pairing for new device
1. Press the pairing button for 3s to enter the pairing mode.
2. Press the power button for 3s to turn the headphones on.

5. Charging



1. Please connect the headphones to power source with the included Type C cable.
2. Press the power button for 3s to turn the headphones on.

Note:
Please do not charge the headphones when there is liquid or other liquids inside the charging port, which may damage the headphones.

6. Controls



1. Press and hold the "B" and "M" buttons for 5s to reset the headphones.
2. Press the power button for 3s to turn the headphones on.

Note:
The headphones will automatically connect to the last paired device when powered on.

For more information, please visit our website:

www.edifier.com



Model: WH700NB
Edifier International Limited
2/F, 8th Floor
General Manager Office
Hong Kong

www.edifier.com
©2023 Edifier International Limited. All rights reserved.
Printed in China

NOTES:
For the need of technical improvement and system upgrade, information and software may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and descriptions shown on the manual may be slightly different from actual products.
If any difference is found, the actual products prevail.

Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual

User manual for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, reset, dual-device connection, charging, and controls.



[Edifier WH700NB Pro Wireless Headphones User Manual](#)

Detailed guide for the Edifier WH700NB Pro wireless headphones, covering setup, pairing, controls, charging, and wired listening. Learn how to use your headphones effectively.



W820NB (双金版)
双金版蓝牙主动降噪耳机

▼ 产品说明及配件



- 配件：耳机 x 1 Type-C充电线 x 1 收纳包 x 1 保修卡 x 1
- 注：
本说明书中的图片均为示意图，可能与实物有偏差，
请以实物为准。

▼ 开关机

- 开机：长按电源键约3秒，蓝灯亮起；
- 关机：长按电源键约3秒，红灯亮起熄灭。



▼ 充电



- 耳机充电
 - 插入充电的充电线为耳机充电。
 - 充电时红绿指示灯同时亮起，充电指示灯在充电过程中会常亮；充电完成后在数秒钟内熄灭。充电指示灯熄灭表示充电完成，充电指示灯熄灭。

警告：本产品可充电电池，请勿拆解、短路、高温、火中，以免引起火灾。
警告：请勿将本产品放入火中，以免引起火灾。

▼ 操作说明

■ 蓝牙配对



- 首次开机：长按电源键约3秒开机，此时蓝灯交替闪烁（即进入蓝牙配对模式）。
- 手机搜索：“EDIFIER W820NB 双金版”选择连接，成功连接后蓝灯熄灭，即连接成功。首次使用过的设备，连接蓝牙设备，耳机将自动连接。

- 恢复出厂设置
 - 长按电源键约3秒，蓝灯熄灭，蓝灯熄灭。

■ 音乐播放



■ 通话



■ 模式切换/蓝牙配对



注：更多个性化设置请使用Edifier Connect APP打开

▼ 常见问题解答

- 红色指示灯代替蓝色指示灯闪烁。
 - 表示耳机电量低，需要再次对耳机充电。
- 耳机听不到声音。
 - 确认耳机是否处于开机状态。
 - 确认耳机音量是否调至合适。
 - 确认耳机是否与手机正常连接。
 - 确认耳机是否在工作范围内。
- 耳机播放效果不好。
 - 确认耳机是否处于开机状态。
 - 耳机的有效使用距离为10米，请确认耳机在有效使用距离内，且手机与手机无遮挡物阻隔。
- 为什么播放音乐时，耳机不能进行暂停、播放、下一曲控制。
 - 部分安卓手机与耳机配对的设备不支持A2DP/Bluetooth Audio/Remote Control Profile协议。

▼ 保养与维修

- 管理电池的产品长时间不使用,请至少每隔三个月充一次电。
- 存放产品于干燥,无强腐蚀性气体的地方,以免对产品内部造成损害。
- 勿将产品暴露于太阳直射或高温潮湿的地方,高温会缩短电子元件的使用寿命,损坏电池,使某些塑料材料变形。
- 勿将产品置于过热的地方,以免损坏内部电路。
- 勿以湿布清洁产品,以免将产品弄湿,造成安全隐患。
- 不要拆解、焚烧、挤压、刺穿产品,以免会损坏内部电路。
- 勿接触腐蚀性化学物品,避免刺激皮肤。
- 不要将液体倒在产品表面上,以免损坏外壳和内部零件。

北京爱德菲科技有限公司 出品

地址:北京市昌平区回龙观镇龙泽苑101号

邮编:100088

客户服务热线:400-888-8888

网址:www.edifier.com

北京爱德菲科技有限公司 出品

地址:北京市昌平区回龙观镇龙泽苑101号

邮编:100088

客户服务热线:400-888-8888

网址:www.edifier.com



微信扫一扫,更多维修

Documents - Edifier – WH700NB



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual

BC

EN 1. Power ON/OFF



3s
Indicator

1. Power ON: press and hold the "O" key for about 3s when powered OFF until the green LED blinks.

2. Power OFF: press and hold the "O" key for about 3s when powered ON until the red LED blinks.

Note:

1. If there is no Bluetooth connection when the headphones are powered on but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.

2. If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

2. Pairing



3s
Indicator

Pairing for the first time

1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.

2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Pairing for new device

1. Press and hold the "S" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.

2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Note:

For subsequent use, the headphones will automatically connect to the device used last time.

3. Reset



5s
Indicator

Press and hold the "+" and "-" keys simultaneously for about 5s when powered on. Wait for the green LED blinks 5 times to clear the Bluetooth pairing records and re-enter Bluetooth pairing mode. The red and green LED will then blink alternately.

4. Dual-device connection

1. Pair Bluetooth device A with the headphones. Upon the pairing is successful, keep the headphones powered on, then press and hold the "S" key for about 3s to re-enter the Bluetooth pairing mode, red and green LED will blink alternately, meanwhile, device A is disconnected from the headphones.

2. Select "EDIFIER WH700NB" in Bluetooth device B's setting to connect successfully.

3. Select "EDIFIER WH700NB" in Bluetooth device A's setting to connect manually.

Note:

1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.

2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.

[Edifier WH700NB Wireless Noise Cancellation Headphones User Manual](#)

This manual provides instructions for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, resetting, dual-device connection, charging, and controls.

lang:en score:47 filesize: 444.64 K page_count: 7 document date: 2023-10-07

3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

5. Charging



1. Please connect the headphones to power source with the included Type-C charging cable for charging.
2. Red LED is steady lit when charging and off when fully charged.

Note:
Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

Input: 5V=1A

6. Controls



- Note:**
1. — = Press and hold.
 2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
 3. Images are for illustrative purposes only and may differ from the actual product.
 4. Download Edifier Connect App for more customizable control settings.

For more information, please visit our website:

www.edifier.com



@Edifierglobal



@Edifier_Global



@Edifier_Global

Model: EDF200126
Edifier International Limited
P.O. Box 6264
General Post Office
Hong Kong

www.edifier.com
©2023 Edifier International Limited. All rights reserved.
Printed in China

NOTICE:
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product. If any difference is found, the actual product prevails.




WH700NB Pro

Wireless Over-Ear Headphones with Active Noise Cancellation
Model: EDF200168

— Manual —



EN 1. Power ON/OFF



Press and hold the power button to power on/off.

2. First pairing





- #### 4. Multipoint connection



- ## 5. Controls

A diagram illustrating the connection between a 4-core processor and a 4-core GPU. On the left, there are four processor cores, each represented by a circle with a dot and a label: 'x1', '—', 'x1', and '—'. On the right, there are four GPU cores, each represented by a circle with a dot and a label: 'x1', '—', 'x1', and '—'. Lines connect each processor core to a corresponding GPU core, showing a 1:1 mapping between the two sets of cores.

Diagram showing the side of the watch with a button labeled '5s' and a crown labeled 'x6'.

7. Charging



lang:en score:45 filesize: 856.62 K page_count: 8 document date: 2024-11-06



Input: 5V $\Rightarrow$ 1A

Connect the headphones to a power source via the USB-C cable for charging.

Note: 1. Make sure the USB-C port is completely dry before charging.
2. When charging with a USB-C cable, the product is used as wired headphones and Bluetooth functions are unavailable.

8. Wired listening



Connect to the headphones via the USB-C cable. Wired listening will automatically disable Bluetooth mode.



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual

BC

EN 1. Power ON/OFF



3s
Indicator

1. Power ON: press and hold the "O" key for about 3s when powered OFF until the green LED blinks.
2. Power OFF: press and hold the "O" key for about 3s when powered ON until the red LED blinks.

Note:

1. If there is no Bluetooth connection when the headphones are powered on but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.
2. If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

2. Pairing



3s
Indicator

Pairing for the first time

1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Pairing for new device

1. Press and hold the "+" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Note:

For subsequent use, the headphones will automatically connect to the device used last time.

3. Reset



5s
Indicator

Press and hold the "+" and "-" keys simultaneously for about 5s when powered on. Wait for the green LED blinks 5 times to clear the Bluetooth pairing records and re-enter Bluetooth pairing mode. The red and green LED will then blink alternately.

4. Dual-device connection

1. Pair Bluetooth device A with the headphones. Upon the pairing is successful, keep the headphones powered on, then press and hold the "+" key for about 3s to re-enter the Bluetooth pairing mode, red and green LED will blink alternately, meanwhile, device A is disconnected from the headphones.
2. Select "EDIFIER WH700NB" in Bluetooth device B's setting to connect successfully.
3. Select "EDIFIER WH700NB" in Bluetooth device A's setting to connect manually.

[\[pdf\]](#) User Manual

WH700NB User Manual manual eng Edifier vezeték nélküli fejhallgató ANC bézs 40339 34296

7cbf496baeccc13e72155ce24ebf66c puputeve hu media wysiwyg attachments |||

WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual EN 1. Power ON/OFF 3s Indicator 1. Power ON: press and hold the the green LED blinks. 2. Power OFF: press and hold the the red LED blinks. key for about 3s when powered OFF until key for about 3s when powered ON until Note: ...

Note:

1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.
2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

5. Charging



1. Please connect the headphones to power source with the included Type-C charging cable for charging.
2. Red LED is steady lit when charging and off when fully charged.

Note:

Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

input: 5V=1A

6. Controls



Note:

1. —: Press and hold.
2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
3. Images are for illustrative purposes only and may differ from the actual product.
4. Download Edifier Connect App for more customizable control settings.

For more information, please visit our website:

www.edifier.com



@Edifiernglobal



@Edifier_Global



@Edifier_Global

Model: EDF200126
Edifier International Limited
P.O. Box 6264
General Post Office
Hong Kong

www.edifier.com
© 2023 Edifier International Limited. All rights reserved.
Printed in China

NOTICE:
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product.
If any difference is found, the actual product prevails.

PT 1. Ligar/Desligar



1. Ligar: mantenha pressionado o botão "O" por aproximadamente 3s com o aparelho DESLIGADO até o LED verde piscar.
2. Desligar: mantenha pressionado o botão "O" por aproximadamente 3s com o aparelho LIGADO, até o LED vermelho piscar.

Nota:

- Nota:**
1. Se não houver conexão Bluetooth quando o fone estiver ligado, mas não estiver no modo de cancelamento de ruído, o fone irá desligar automaticamente após 5 minutos.
 2. Se não houver conexão Bluetooth quando o fone estiver ligado e no modo de cancelamento de ruído, o fone irá desligar automaticamente após 4 horas.

2. Pareamento



Emparelhando pela primeira vez

1. Mantenha pressionado o botão "O" por aproximadamente 3s com o aparelho desligado. O LED vermelho e verde piscará alternadamente.
2. Selecione "EDIFIER WH700NB" na configuração do seu dispositivo para conectar. O LED verde piscará duas vezes 5 segundos após bem-sucedido.

Emparelhamento em um novo dispositivo

- Emparelhamento em um novo dispositivo**
1. Mantenha pressionado o botão "X" por aproximadamente 3s com o aparelho desligado para ignorar o último dispositivo conectado e emparelhar ao novo dispositivo Bluetooth. O LED vermelho e verde piscará alternadamente.
 2. Selecione "EDIFIER WH700NB" na configuração do seu dispositivo para conectar. O LED verde piscará duas vezes 5 segundos após bem-sucedido.

Note:

Nota:
Para uso posterior, os fones de ouvidos se conectarão automaticamente ao dispositivo utilizado na última vez.

3. Reiniciar



Indicador

Mantenha pressionado simultaneamente os botões "+" e "-" por cerca de 5s até o LED verde piscar 6 vezes com o dispositivo ligado para apagar os registros de pareamento Bluetooth e entrar no modo de pareamento novamente, o LED vermelho e verde piscará alternadamente.

4. Conexão dupla em dispositivo

1. Emparelhe o dispositivo Bluetooth A ao fone de ouvido. Quando o pareamento ocorrer com sucesso, mantenha o fone ligado, em seguida, mantenha pressionado o botão "+" por cerca de 3s para entrar no modo de pareamento novamente, o LED vermelho e verde piscará alternadamente, enquanto isso, o dispositivo A está desconectado do fone de ouvido.

2. Selecione "EDIFIER WH700NB" nas configurações do dispositivo Bluetooth B para conectar.

3. Selecione "EDIFIER WH700NB" nas configurações do dispositivo Bluetooth A para conectá-lo manualmente.

Nota:

1. Quando receber uma chamada, os fones de ouvido não alternar automaticamente para o dispositivo da chamada. Quando a chamada for encerrada, os fones de ouvido voltam ao dispositivo original.

2. O assistente de voz pode ser ativado no último smartphone ativo caso dois smartphones estejam emparelhados aos fones de ouvido simultaneamente.

3. Alternar entre um dispositivo e outro, pausar música no dispositivo atual, e começar a reproduzir áudio no segundo dispositivo, para o qual você deseja alternar.

4. Sempre que forem ligados, os fones de ouvido irão reconectar-se automaticamente aos dois últimos dispositivos conectados dentro do alcance do Bluetooth.

5. Carregamento

Indicador

1. Conecte o fone à fonte de alimentação com o cabo de carregamento Tipo-C incluso para carregá-lo.

2. O LED vermelho fica aceso constantemente durante o carregamento e apagado quando está totalmente carregado.

Nota:

Não carregue os fones de ouvido quando houver suor ou outros líquidos dentro da porta de carregamento, isto pode danificar os fones de ouvido.

Entrada: 5V — 1A

6. Controles

—

3s

1s

1s

1s

1s

3s

x1

x1

x1

x1

x1

x1

x2

1. —: Manter premido.

2. Controle de som padrão: cancelamento de ruído, som ambiente e cancelamento de ruído desligado.

3. As imagens são apenas ilustrativas e podem diferir do produto real.

4. Faça o download do App Edifier Connect para obter mais configurações de controle personalizáveis.

Para mais informações, por favor, acesse nosso site:

www.edifier.com

f

@Edifierglobal

ig

@Edifier_Global

tw

@Edifier_Global

Modelo: EDF200126

Edifier International Limited

P.O. Box 4264

General Post Office

Hong Kong

www.edifier.com

© 2023 Edifier International Limited. Todos os direitos reservados.

Impresso na China

AVISO:

Para a necessidade de melhoramento técnico e atualização do sistema, as informações contidas neste documento poderão ser sujeitas a alteração, periodicamente, sem aviso prévio.

Os produtos da EDIFIER serão personalizados para aplicações diferentes. As imagens e ilustrações apresentadas nesta manual poderão ser ligeiramente diferentes do produto real. Se for encontrada qualquer diferença, prevalece o produto real.

[pdf] User Manual

WH700NB User Manual Download Fone com ANC Bateria 68h EDIFIER Brasil edifierbr br 2023 11 |||

PT 1. Ligar/Desligar 3s Indicador 1. Ligar: mantenha pressionado o boto por aproximadamente 3s c ... te 3s com o aparelho desligado. O LED vermelho e verde piscar alternadamente. 2. Selecione EDIFIER **WH700NB** na configurao do seu dispositivo para conectar. O LED verde piscar duas vezes 5 segundos ap... lang:pt score:43 filesize: 445.18 K page_count: 1 document date: 2023-10-07

WH700NB PRO - Ligar/Desligar

ON

1s

OFF

1s

Mantenha pressionado o botão de energia para ligar/desligar.


2. Primeiro emparelhamento

Bluetooth

EDIFIER WH700NB Pro

1. Uma vez ligados, os fones de ouvido entrarão automaticamente no modo de emparelhamento de Bluetooth.
2. Selecione "EDIFIER WH700NB Pro" na configuração do seu dispositivo para conectar.

3. Emparelhamento em um novo dispositivo



1. Com o aparelho LIGADO, mantenha pressionado o botão "P" por cerca de 3 segundos para entrar no modo de emparelhamento Bluetooth.
2. Selecione "EDIFIER WH700NB Pro" na configuração do seu dispositivo para conectar.

Nota: Para uso posterior, os fones de ouvido se conectarão automaticamente ao dispositivo utilizado na última vez.

4. Conexão multiponto




1. Emparelhamento do dispositivo A ao fone de ouvido bem-sucedido.
2. Mantenha pressionado o botão "P" por 3 segundos para entrar novamente no modo de emparelhamento Bluetooth, em seguida, selecione "EDIFIER WH700NB Pro" nas configurações do dispositivo B para conectá-lo.
3. Selecione "EDIFIER WH700NB Pro" nas configurações do dispositivo A para conectá-lo manualmente.


Nota: Nas situações posteriores, os fones de ouvido não reconectarão automaticamente aos dois últimos dispositivos usados na última vez.

5. Controles

• Chamada



• Música



• Modo



Nota:

1. "x1" Pressione, "x2" Pressione duas vezes, "x3" Mantenha pressionado.
2. Controle de som padrão: Alto cancelamento de ruído / Som ambiente / Cancelamento de ruído desligado.
3. Faça o download do App EDIFIER Connect para obter mais configurações de controle personalizadas.

6. Reiniciar



Com o aparelho ligado, pressione os botões "+" e "-" por 5s para concluir a redefinição, em seguida os headphones entrarão automaticamente no modo de emparelhamento Bluetooth se o procedimento for bem-sucedido.

7. Carregamento



[pdf] User Manual

Download Fone com cancelamento de ruído e Hi Res WH700NB Pro EDIFIER Manual WH700NBPRO
edifierbr br 2024 12 |||

WH700NB PRO - Ligar/Desligar ON - 1s OFF - 1s Mantenha pressionado o boto de energia para ligar/desligar. 2. Primeiro emparelhamento Bluetooth EDIFIER **WH700NB Pro** 1. Uma vez ligados, os fones de ouvido entraro automaticamente no modo de emparelhamento de Bluetooth. 2. Selecione EDIFIER **WH700NB Pro** ...
lang:pt score:43 filesize: 397.98 K page_count: 1 document date: 0000-00-00

Entrada: 5 V $\approx$ 1 A

Conecte o fone de ouvido a uma fonte de energia pelo cabo USB-C para carregá-lo.

Nota

1. Certifique-se de que a porta USB-C esteja completamente seca antes de carregar.

2. Quando estiver carregando com um cabo USB-C, o produto é usado na função de headphones com fio, e as funções de Bluetooth estão indisponíveis.

8. Audição cabeada



Conecte-se aos headphones por meio do cabo USB-C. Ouvir com o cabo conectado irá desativar o modo Bluetooth automaticamente.

EDIFIER

WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual

BC

EN 1. Power ON/OFF



1. Power ON: press and hold the "O" key for about 3s when powered OFF until the green LED blinks.

2. Power OFF: press and hold the "O" key for about 3s when powered ON until the red LED blinks.

Note:

1. If there is no Bluetooth connection when the headphones are powered on but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.

2. If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

2. Pairing



Pairing for the first time

1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.

2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Pairing for new device

1. Press and hold the "I" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.

2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Note:

For subsequent use, the headphones will automatically connect to the device used last time.

3. Reset



Press and hold the "+" and "-" keys simultaneously for about 5s when powered on. Wait for the green LED blinks 6 times to clear the Bluetooth pairing records and re-enter Bluetooth pairing mode. The red and green LED will then blink alternately.

4. Dual-device connection

1. Pair Bluetooth device A with the headphones. Upon the pairing is successful, keep the headphones powered on, then press and hold the "I" key for about 3s to re-enter the Bluetooth pairing mode, red and green LED will blink alternately, meanwhile, device A is disconnected from the headphones.

2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect successfully.

3. Select "EDIFIER WH700NB" in Bluetooth device As setting to connect manually.

Note:

1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.

[Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual](#)

User manual for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, reset, dual-device connection, charging, and controls.

lang:en score:43 filesize: 452.88 K page_count: 7 document date: 2024-08-10

2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

5. Charging



1. Please connect the headphones to power source with the included Type-C charging cable for charging.
2. Red LED is steady lit when charging and off when fully charged.

Note:
Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

Input: 5V=1A

6. Controls



- Note:**
1. —: Press and hold.
 2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
 3. Images are for illustrative purposes only and may differ from the actual product.
 4. Download Edifier Connect App for more customizable control settings.

For more information, please visit our website:

www.edifier.com



@Edifierglobal



@Edifier_Global



@Edifier_Global

Model: EDF200126
Edifier International Limited
P.O. Box 4254
General Post Office
Hong Kong

www.edifier.com
© 2023 Edifier International Limited. All rights reserved.
Printed in China

NOTICE:
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product. If any difference is found, the actual product prevails.

Edifier and the Edifier logo are registered trademarks of Edifier International Limited.



WH700NB Pro

Wireless Over-Ear Headphones with Active Noise Cancellation
Model: EDF200168

— Manual —




EN 1. Power ON/OFF



Press and hold the power button to power on/off.

2. First pairing



- #### 4. Multipoint connection



- ## 5. Controls

-

-

-

6. Reset



7. Charging

lang:en score:42 filesize: 11.57 M page_count: 8 document date: 2024-10-08



Input: 5V ±1A

Connect the headphones to a power source via the USB-C cable for charging.

Note: 1. Make sure the USB-C port is completely dry before charging.
2. When charging with a USB-C cable, the product is used as wired headphones and Bluetooth functions are unavailable.

8. Wired listening



Connect to the headphones via the USB-C cable. Wired listening will automatically disable Bluetooth mode.



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual

BC

EN 1. Power ON/OFF



1. Power ON: press and hold the "O" key for about 3s when powered OFF until the green LED blinks.
2. Power OFF: press and hold the "O" key for about 3s when powered ON until the red LED blinks.

Note:

1. If there is no Bluetooth connection when the headphones are powered on but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.
2. If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

2. Pairing



Pairing for the first time

1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Pairing for new device

1. Press and hold the "+" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Note:

For subsequent use, the headphones will automatically connect to the device used last time.

3. Reset



Press and hold the "+" and "-" keys simultaneously for about 5s when powered on. Wait for the green LED blinks 6 times to clear the Bluetooth pairing records and re-enter Bluetooth pairing mode. The red and green LED will then blink alternately.

4. Dual-device connection

1. Pair Bluetooth device A with the headphones. Upon the pairing is successful, keep the headphones powered on, then press and hold the "+" key for about 3s to re-enter the Bluetooth pairing mode, red and green LED will blink alternately, meanwhile, device A is disconnected from the headphones.
2. Select "EDIFIER WH700NB" in Bluetooth device B's setting to connect

[\[pdf\]](#) User Manual

WH700NB User Manual Manuale utente Edifier Cuffie Cancellazione Attiva Rumore Autonomia di 68 Ore
Al Riduzione del Nelle Chiamate Connessioni Duali Leggero Pieghevole Ricarica Rapida Bluetooth 5 3
Nero Amazon it Elettronica A1MGwpGA3DL m media amazon images I |||

WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual EN 1. Power ON/OFF 3s Indicator 1. Power ON: press and hold the the green LED blinks. 2. Power OFF: press and hold the the red LED blinks. key for about 3s when powered

Note:

- 1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.
- 2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
- 3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
- 4. Easy time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

 $\wedge$ 

1. Please connect the headphones to power source with the included Type-C charging cable for charging.
2. Red LED is steady lit when charging and off when fully charged.

Note:
Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

input: 5V±1A

^



- Note:**
1. — : Press and hold.
 2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
 3. Images are for illustrative purposes only and may differ from the actual product.
 4. Download Edifier Connect App for more customizable control settings.

For more information, please visit our website:

www.edifier.com



@Edifierglobal



@Edifier Global



@Edifier Global

Model: EDF200126
Edifier International Limited
P.O. Box 6264
General Post Office
Hong Kong

www.edifier.com
© 2023 Edifier International Limited. All rights reserved.
Printed in China

NOTICE:
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product.
If any difference is found, the actual product prevails.



WH700NB

Wireless Noise Cancellation Over-Ear Headphones

Manual



^



1. Power ON: press and hold the "O" key for about 3s when powered OFF until the green LED blinks.
2. Power OFF: press and hold the "O" key for about 3s when powered ON until the red LED blinks.

Note:

1. If there is no Bluetooth connection when the headphones are powered on but not in noise cancellation mode, the headphones will power off automatically in 5 minutes.
2. If there is no Bluetooth connection when the headphones are powered on and in noise cancellation mode, the headphones will power off automatically in 4 hours.

^





1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

1. Press and hold the "O" key for about 3s when powered off. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

1. Press and hold the "F" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

1. Press and hold the "F" key for about 3s when powered on to skip the latest connected device and pair with the new Bluetooth device. Red and green LEDs will blink alternately.
2. Select "EDIFIER WH700NB" in Bluetooth device setting to connect. Green LED will blink twice in 5 seconds when successfully.

Note:
For subsequent use, the headphones will automatically connect to the device used last time.

 $\wedge$ 

powered on. Wait for the green LED blinks 6 times to clear the Bluetooth pairing records and re-enter Bluetooth pairing mode. The red and green LED will then blink alternately.

 $\wedge$

2. Select "EDIFIER WH700NB" in Bluetooth device B's setting to connect successfully.
3. Select "EDIFIER WH700NB" in Bluetooth device A's setting to connect manually.

Note:

1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.
2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

- Note:**
1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.
 2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
 3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
 4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

^



2. Red LED is steady lit when charging and off when fully charged.

Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

^



1. —: Press and hold.
2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
3. Images are for illustrative purposes only and may differ from the actual product.
4. Download Edifier Connect App for more customizable control settings.

1. —: Press and hold.
2. Default sound control: noise cancellation & ambient sound & noise cancellation off.
3. Images are for illustrative purposes only and may differ from the actual product.
4. Download Edifier Connect App for more customizable control settings.



Edifier International Limited
P.O. Box 6264
General Post Office
Hong Kong

©2023 Edifier International Limited. All rights reserved.
Printed in China

For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.


Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product. If any difference is found, the actual product prevails.




[Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones User Manual](#)

User manual for the Edifier WH700NB Wireless Noise Cancellation Over-Ear Headphones, covering power on/off, pairing, dual-device connection, status light, controls, charging, and compliance information. This manual is available in multiple languages.

lang:en score:40 filesize: 1.83 M page_count: 1 document date: 2023-06-25

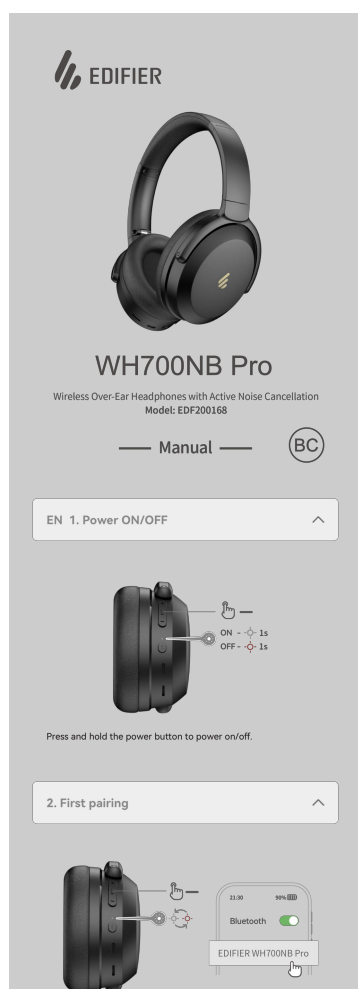

- ### 3. Pairing for new device




- #### 4. Multipoint connection




- ## 5. Controls


- Call



- Music



- Mode



6. Reset



In ON state, press "+" and "-" buttons for 5s to finish reset, then headphones will automatically enter Bluetooth pairing mode if successful.

7. Charging



Input: $5V \Rightarrow 1A$

Connect the headphones to a power source via the USB-C cable for

WH700NB Pro User Manual EDIFIER Pro B 3 A EDIFIER Pro

Descubra o App ConneX para obter mais configurações personalizáveis. Conecte-se aos headphones por meio do cabo EDIFIER.

MULTIimage anhducdigital vn 24610 20250422150346 29ffe69efdf9082e7fc799758447d5b0cdn ||| |||

WH700NB Pro Wireless Over-Ear Headphones with Active Noise Cancellation Model: EDF200168

Manual EN 1. Power ON/OFF ON - 1s OFF - 1s Press and hold the power button to power on/off. 2. First pairing Bluetooth EDIFIER WH700NB Pro 1. Once power


WH700NB Pro Wireless Over-Ear Headphones with Active Noise Cancellation Model:

EDF200168 Manual EN 1. Power ON/OFF ON - 1s OFF - 1s Press and hold the

power button to power on/off. 2. First pairing Bluetooth EDIFIER **WH700NB** Pro 1.

Once powered on, the headphones will automatically enter Bluetooth p...

lang:en score:38 filesize: 856.62 K page_count: 8 document date: 2024-11-06

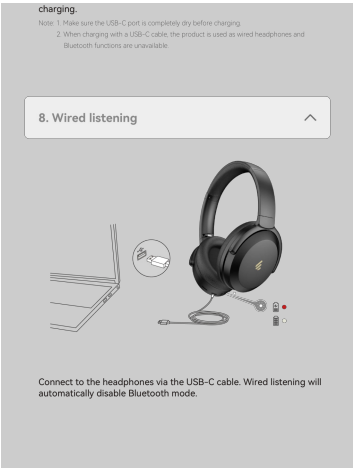

[pdf] User Manual Safety Datasheet

WH700NB User Manual Bluetooth B EDIFIER WH700NB 3 Bluetooth A EDIFIER

v1 edifier my 2024 06 srsLtd AfmBOOpYR4Lkdom 6tzRAXIQvDPfzSbeDHAJrou98rnDLNBxi4 WNx

AfmBOoo au26LrX Q0ujT4dEaU2b4e6aWPTsFYjBegJg1wYXEs8XPnKL Bluetooth B EDIFIER

edifier WNxedifier Q0ujT4dEaU2b4e6aWPTsFYjBegJg1wYXEs8XPnKLedifier

AfmBOoq92PrTI3jQesXux2whuErkepRJTikMXrn XZufUYZa66HUHaMU Select EDIFIER in Bluetooth

device setting to connect Green LED will blink twice 5 seconds when successfully Note For subsequent

use theedifier XZufUYZa66HUHaMUedifier

AfmBOorxvf87KFTcDsVMKyyMX22KF7grj3gHEoGuEmn0Y823vrTpQrK

AfmBOorxvf87KFTcDsVMKyyMX22KF7grj3gHEoGuEmn0Y823vrTpQrKedifier

AfmBOoqXh8ozVM2Z2hqpewC8s6jJNZaiaRrk5fRUViegfKJwANH2y94V

AfmBOoqXh8ozVM2Z2hqpewC8s6jJNZaiaRrk5fRUViegfKJwANH2y94Vedifier

AfmBOOp1dU00LCrIGs0eY9u4maio03C0tHAVW6qO4hfrgtaXpiZiN3Km

AfmBOOp1dU00LCrIGs0eY9u4maio03C0tHAVW6qO4hfrgtaXpiZiN3Kmedifier

AfmBOorveAqhphdyXwO5jjWOPhyN 9gDZJR7wGweVpD9LRL mrfVfw7 WH700NB Edifier

EdifierBluetooth B EDIFIER thecdn shopify s files 1 0747 3768 0702 v 1706169214edifier

mrfVfw7edifier AfmBOOrIWt99F8ed9Ox5VxbMa52rrsuGjaqFF9S oi8qKmfXEQqmfNMA theBluetooth

B EDIFIER cdn AfmBOoq vIOE7Fn bysIY2 a3vAP1LT5UD 1x3s3TEWky7kYWNb2rGGgedifier

1F2CERmGjHORf6PewP2lfmj2 Z6joRLXyyli6R9DvuPOtGFTedifier oi8qKmfXEQqmfNMAedifier

AfmBOOpTdDEchhQrAO5OlyAO14LtSMNEjKUbSDN3G24K6hiHiNZQDhsz

AfmBOOpTdDEchhQrAO5OlyAO14LtSMNEjKUbSDN3G24K6hiHiNZQDhszedifier

AfmBOoob6wVtFHBA0Re7TExsJOvrWabUT7N226qF6cwCtiXFTvtXMZzi the cdn AfmBOoqG8HGw

EJcfE9L5dzgsl5L6mvpBTu39vMhBiJe3IFooEvToW1edifier

AfmBOoob6wVtFHBA0Re7TExsJOvrWabUT7N226qF6cwCtiXFTvtXMZziedifier

AfmBOOpWrjvJWOk9zPp2qwKd7EziU0nJu cle51pqBE1EYnIBXe7RMBH the Bluetooth B EDIFIER

AfmBOoodEtm0XJg7zajjIh7rrRtpSf8tzPWcBc89e9H4Xz7Rl1zf77Zfedifier

cle51pqBE1EYnIBXe7RMBHedifier AfmBOoqBPDBk4u23pQSFgPLA159SwqmiGbMhu8

Taj0x52sN86jXtTe4 Taj0x52sN86jXtTe4edifier

AfmBOorvUHAOiAMchew7LpO4KncSds4Q5wJ8WLCgJbOiYP6mUuLwoG1H ||| ||| WH700NB Wireless

Noise Cancellation Over-Ear Headphones Manual EN 1. Power ON/OFF 3s Indicator 1. Power ON: press

and hold the the green LED blinks. 2. Power OFF: press and hold the the red LED blinks. key for about 3s

when powered OFF unt ||| WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual EN 1.

Power ON/OFF 3s Indicator 1. Power ON: press and hold the the green LED blinks. 2. Power OFF: press

and hold the the red LED blinks. key for about 3s when powered OFF unt ||| WH700NB Wireless Noise

Cancellation Over-Ear Headphones Manual EN 1. Power ON/OFF 3s Indicator 1. Power ON: press and

hold the the green LED blinks. 2. Power OFF: press and hold the the red LED blinks. key for about 3s

when powered OFF unt ||| WH700NB Wireless Noise Cancellation Over-Ear Headphones Manual EN 1.

Power ON/OFF 3s Indicator 1. Power ON: press and hold the the green LED blinks. 2. Power OFF: press

and hold the the red LED blinks. key for about 3s when powered OFF unt ||| WH700NB Wireless Noise

- Note:**
1. When a call comes, the headphones will automatically switch to the calling device. After the call ends, the headphones can switch back to the original device.
 2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the headphones simultaneously.
 3. Switching from device to device: pause music on the current device, and start playing audio on the second device you would like to switch to.
 4. Each time when powered on, the headphones will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.



Indicator

- Note:**
Please do not charge the headphones when there is sweat or other liquids inside the charging port, which may damage the headphones.

input: 5V=1A

[illegible]

- For more information, please visit our website:

www.edifier.com



@Edifierglobal



@Edifier Global



@Edifier Global

Model: EDF200126
Edifier International Limited
P.O. Box 6264
General Post Office
Hong Kong

www.edifier.com
© 2023 Edifier International Limited. All rights reserved
Printed in China

NOTICE:
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.
Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product. If any difference is found, the actual product prevails.

when powered OFF until

lang:en score:38 filesize: 1.73 M page count: 7 document date: 2023-08-22

[\[pdf\]](#) User Manual

IB 200 W0700P 00 WH700NB Pro V1.0 User manual Edifier International Limited EDF251

Wireless Over Ear Headphones with Active Noise Cancellation Z9G Z9GEDF251 edf251


IB-200-W0700P-00 **WH700NB** Pro/25//V1.0 128 114x165 4 WHAT S IN THE BOX x1

WH700NB Pro Wireless Over-Ear Headphones with Active Noise Cancellation

Model:EDF200168 x1 x1 1 POWER ON/OFF 2s ON - 1s OFF - 1s x1 Press and hold the power button to power on/off. FR Maintenez le bouton d'alimentation...

lang:es score:36 filesize: 4.06 M page count: 1 document date: 2024-08-08



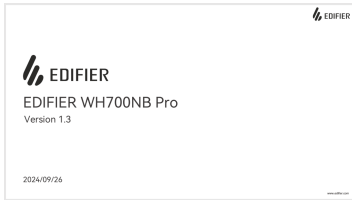

[pdf]

EDIFIER WH700NB ProEDIFIER Pro1A382A93 AAA8 43A3 BB7F C041BAD398D41A382A93

C041BAD398D4pan dwra gr 1A382A93 C041BAD398D4 |||

EDIFIER **WH700NB** Pro Version 1.3 2024/09/26 www.edifier.com **WH700NB** Pro Wireless Over-Ear Headphones with Active Noise Cancellation EDIFIER Product Deck Over-Ear Headphones **WH700NB** Pro Wireless Over-Ear Headphones with Active Noise Cancellation Sound Quality Hi-Res Audio offers a original, i...

lang:en score:35 filesize: 2.4 M page_count: 9 document date: 2025-05-20



[pdf]

Edifier WH700NB PL HU cdn files innpro pl |||

Edifier **WH700NB** vezeték nélküli fejhallgató, ANC Felhasználói kézikönyv

Bekapcsolás/Kikapcsolás 3s Indikátor 1. Bekapcsolás: Kikapcsolt állapotban tartva lenyomva az O gombot kb. 3 másodpercig, amíg a zöld LED villogni nem kezd. 2.

KIKAPCSOLÁS: Nyomja meg és tartva lenyomva az O gombot kb. 3 másodpercig, amikor

...

lang:no score:35 filesize: 2.02 M page_count: 12 document date: 2024-01-09




[pdf]


Edifier WH700NB PL Pobierz Słuchawki nauszne EDIFIER Szary sklep internetowy Avans.pl Instrukcja obsługi avans products files 63 6360268 |||

WH700NB Słuchawki bezprzewodowe, ANC Instrukcja obsługi Włączanie/Wyłączanie zasilania 1. Włączanie zasilania: gdy urządzenie jest WYŁCZONE nacisnąć i przytrzymać przycisk „O” przez około 3 sekundy, do chwili gdy zielona dioda LED zacznie migać. 2.

Wyłączanie zasilania: gdy urządzenie jest WŁCZONE nacisnąć i przytrzymać przycisk „O” przez około 3 sekundy, do chwili gdy zielona dioda LED przestanie migać.

lang:pl score:34 filesize: 2.3 M page_count: 8 document date: 2024-01-26

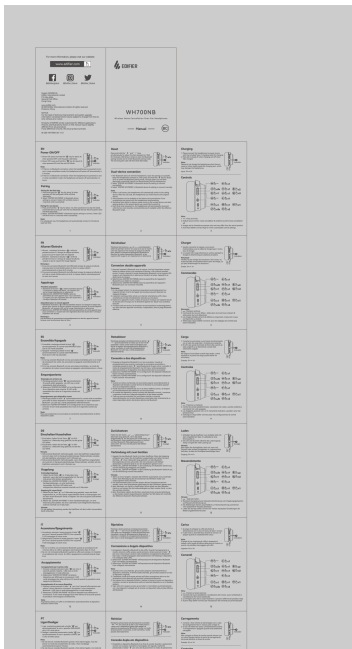

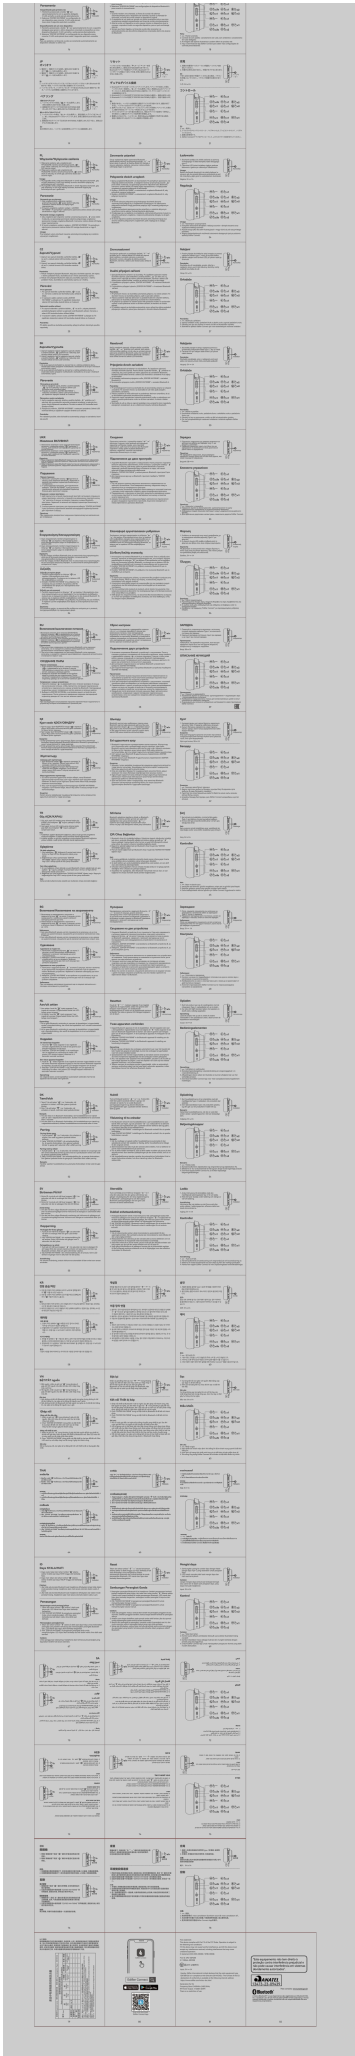

[\[pdf\]](#) User Manual

WH700NB26 V1 0 Edifier Global NAYx1 x2 x1 35 Press and hold 2 Default sound cantial

Виберіть EDIFIER W H700 NB у налаштуваннях Bluetooth пристрою в для з 2811957cdn pay sk
images orig 7 2811957 NAYWH700NB ManuálWH700NB Manuálx1 з EDIFIER WH700NB bezdrátová
sluchátka modrá NeoxShop czEDIFIER šedá czWH700NB Manuálcdn 2811957neoxshop cz manuals
Manuálneoxshop Manuál Wizard Manuálwizard ||| ||| For more information, please visit our website:

www.edifier.com Edifierglobal Edifier_Global Edifier_Global Model: EDF200126 Edifier International
Limited P.O. Box 6264 General Post Office Hong Kong www.edifier.com 2023 Edifier Internationa ||| For
more information, please visit our website: www.edifier.com Edifierglobal Edifier_Global Edifier_Global
Model: EDF200126 Edifier International Limited P.O. Box 6264 General Post Office Hong Kong
www.edifier.com 2023 Edifier Internationa

For more information, please visit our website: www.edifier.com Edifierglobal
Edifier_Global Edi ... rom actual product. If any difference is found, the actual product
prevails. IB-200-WH700N-00 V1.0 **WH700NB** Wireless Noise Cancellation Over-Ear
Headphones Manual EN Power ON/OFF 1. Power ON: press ...

lang:en score:33 filesize: 5.36 M page_count: 1 document date: 2023-08-25



Słuchawki bezprzewodowe Edifier
WH700NB Pro

Instrukcja obsługi



[\[pdf\]](#)

Słuchawki bezprzewodowe Edifier WH700NB Pro Instrukcja obsługi1 Po włączeniu słuchawki automatycznie przejdą w tryb parowania Bluetooth 2 Wybierz „EDIFIER ustawieniach urządzenia aby się połączyć v1mediaexpert pl products files 71 7147660 obsługi EDIFIER |||

Słuchawki bezprzewodowe Edifier **WH700NB** Pro Instrukcja obsługi Włączanie / wylczanie zasilania ON OFF - Nacinij i przytrzymaj przycisk zasilania, aby wlczy/wylczy urzdzenie. Pierwsze parowanie Bluetooth 1. Po wlczeniu słuchawki automatycznie przejd w tryb tryb parowania Bluetooth. 2. Wybierz „ED...

lang:pl **score:33** filesize: 111.5 K page_count: 9 document date: 2024-12-06



WH700NB

Słuchawki bezprzewodowe, ANC

Instrukcja obsługi



[\[pdf\]](#)

Edifier WH700NB PL Instrukcja obsługi pol vezeték nélküli fejhallgató ANC sötétkék 41746 34298 8a94b5c8ad362a946cb1dac47fee98b5 puputeve hu media wysiwyg attachments |||

WH700NB Słuchawki bezprzewodowe, ANC Instrukcja obsługi Włączanie/Wylczanie zasilania 1. Włączanie zasilania: gdy urzdzenie jest WYLCZONE nacinij i przytrzymaj przycisk „, przez około 3 sekundy, do chwili gdy zielona dioda LED zacznie miga. 2. Wylczanie zasilania: gdy urzdzenie jest WLCZONE nacin...

lang:pl **score:33** filesize: 2.37 M page_count: 8 document date: 2024-01-26



WH700NB

Słuchawki bezprzewodowe, ANC

Instrukcja obsługi



[\[pdf\]](#)

Edifier WH700NB PL Media Expert W swoim urządzeniu wybierz i połącz z „EDIFIER Po pomyślnym zakończeniu parowania zielona dioda LED zamiga dwukrotnie w ciągu 5 sekund Uwaga v1 mediaexpert pl products files 63 6360256 Instrukcja obsługi EDIFIER |||

WH700NB Słuchawki bezprzewodowe, ANC Instrukcja obsługi Włączanie/Wylczanie zasilania 1. Włączanie zasilania: gdy urzdzenie jest WYLCZONE nacinij i przytrzymaj przycisk „, przez około 3 sekundy, do chwili gdy zielona dioda LED zacznie miga. 2. Wylczanie zasilania: gdy urzdzenie jest WLCZONE nacin...

lang:pl **score:32** filesize: 2.37 M page_count: 8 document date: 2024-01-26



[pdf]

xxxxx Edifier WH700NB Pro Vezeték nélküli használati útmutatóimages euronics hu product documents aGFzem7DoWxhdGkgw7p0bXV0YXTDsy5wZGY hasznalati utmutato jr8gz4ax v 1 |||

Edifier **WH700NB** Pro Vezetk nlkli fejhallgat hasznlati tmutat Bekapcsols / kikapcsols BE KI - Nyomja meg s tartsa lenyomva a bekapcsol gombot a kszlk bekapcsolshoz/kikapcsolshoz. Els prosts Blue tooth 1. A fejhallgat bekapcsolsa utn automatikusan Bluetooth prosts mdba lp. 2. Vlassza az „EDIFIER... lang:tl **score:32** filesize: 2.15 M page_count: 13 document date: 2024-10-08

[pdf]

5906168433146 WH700NB grey case PL v1sklep maxkuchnie pl storage file pimcore import 2024 12 20 bed7deb97517206f5697b17eeb87bb86 Edifier instrukcja srsLtd AfrmBOor R18 5bBzoUUSQ8 Uvca4L7GAg4feqvAhA9c9pRj5gdIIftI4 |||

Instrukcja obs ugi Marka: Edifier Etui na s uchawki Edifier **WH700NB** Opis Etui na s uchawki Edifier **WH700NB** jest idealnym rozwi zaniem dla tych, kt rzy chc chroni swoje urz dzenia w podr y. Wytrzyma a, ale lekka konstrukcja zapewnia ochron przed uderzeniami i zarysowaniami, a mi kka ... lang:pl **score:32** filesize: 42.81 K page_count: 2 document date:

[pdf]

Edifier WH700NB PL Használati utasítás hun vezetéknélküli fejhallgató ANC bézs 56551 34296 28650a55fd55a106cdb017c99a3b249b puputeve hu media wysiwyg attachments ||| Edifier **WH700NB** vezetkn nlkli fejhallgat, ANC Felhasznli kziknyv Bekapcsols/Kikapcsols 3s Indiktor 1. Bekapcsols: Kikapcsolt llapotban tartsa lenyomva az O gombot kb. 3 msodpercig, amg a zld LED villogni nem kezd. 2. KIKAPCSOLS: Nyomja meg s tartsa lenyomva az O gombot kb. 3 msodpercig, amikor ... lang:no **score:32** filesize: 2.07 M page_count: 12 document date: 2024-07-10

Instrukcja obsługi

Marka: Edifier

Etui na słuchawki Edifier WH700NB

Opis

Etui na słuchawki Edifier WH700NB jest idealnym rozwiązaniem dla tych, którzy chcą chronić swoje urządzenia w podróży. Wytrzymała, ale lekka konstrukcja zapewnia ochronę przed uderzeniami i zarysowaniami, a miękka wyściółka wewnętrzna zapobiega uszkodzeniom słuchawek. Praktyczny pasek ułatwia otwarcie na mgnienie. Z kablem bezdrutowym kieszonki jest idealna do przechowywania dodatkowych akcesoriów, takich jak kabel i adaptery.

Użytkowanie zgodne z przeznaczeniem

Jest on przeznaczony tylko do użytku w zamkniętych pomieszczeniach. Korzystanie z urządzenia na wolnym powietrzu nie jest dozwolone. Należy bezwzględnie unikać kontaktu z wilgocią, np. w łazience itp. Ze względów bezpieczeństwa oraz certyfikacji nie można w żadnym sposób przeobrażać lub zmieniać urządzenia. W przypadku korzystania z produktu w celach innych niż opisane, produkt może zostać uszkodzony. Ponadto użytkowanie niegodzące z przeznaczeniem może spowodować zagrożenia. Dlatego przeczytać instrukcję obsługi i zachować ją do późniejszego wykorzystania.

Wskazówki dotyczące bezpiecznego użytkowania

Należy przestrzegać i przestrzegać zawartych w instrukcji wskazówek dotyczących bezpieczeństwa.

1. Produkt nie jest zabawką. Należy trzymać go z dala od ust i nie wolno go żuć.

2. Chronić produkt przed ekstremalnymi temperaturami, bezpośrednim światłem słonecznym, silnymi wibracjami, wysoką wilgotnością, wilgocią, paleniami, gazami, oparami i rozpryskami.

3. Nie narażać produktu na obciążenia mechaniczne.

4. Jeśli bezpieczna praca nie jest możliwa, należy przerwać pracę przed ponownym włączeniem.

5. Z produktem należy obchodzić się ostrożnie. Wstrząsy, uderzenia lub upuszczenie produktu mogą spowodować jego uszkodzenie.

6. Jeśli istnieją wątpliwości w kwestii obsługi, bezpieczeństwa lub podłączania produktu, należy zwrócić się do wykwalifikowanego technika.

7. Jeśli pojawią się jakiegokolwiek pytania, na które nie ma odpowiedzi w niniejszej instrukcji, prosimy o kontakt z naszym biurem obsługi klienta (mail: sales@edifier.com, strona internetowa: <https://www.edifier.com>) lub z innym specjalistą.

Specyfikacja

Producent	Edifier
Nazwa	WH700NB grey case

[pdf]

5906168433146 WH700NB grey case PL gproxysklep maxkuchnie pl storage file pimcore import 2024 12

20 bed7deb97517206f5697b17eeb87bb86 Edifier instrukcja srsId AfmBOOp5NwkBq4 uCBbg2MFDpd7

XLBUIZ9ZWENr 7MsS3v86j3xQ QE |||

Instrukcja obsługi Marka: Edifier Etui na słuchawki Edifier **WH700NB** Opis Etui na słuchawki Edifier **WH700NB** jest idealnym rozwiązaniem dla tych, którzy chcą chronić swoje urządzenia w podróży. Wytrzymała, ale lekka konstrukcja zapewnia ochronę przed uderzeniami i zarysowaniami, a miękka ...

lang:pl score:32 filesize: 42.98 K page_count: 2 document date:



EDIFIER

Sluchawki bezprzewodowe Edifier WH700NB Pro

Instrukcja obsługi



[pdf]

Sluchawki bezprzewodowe Edifier WH700NB Pro 20 hours ago — Pomyślnie sparuj urządzenie A ze słuchawkami 2 Naciśnij i przytrzymaj przycisk przez 3 sekundy aby ponownie przejść do S słuchawki nauszne EDIFIER ANC mediaexpert pl products files 71 7147660 |||

Sluchawki bezprzewodowe Edifier **WH700NB** Pro Instrukcja obsługi Włączanie / wylczanie zasilania ON OFF - Naciśnij i przytrzymaj przycisk zasilania, aby włączy/wyłączy urządzenie. Pierwsze parowanie Bluetooth 1. Po włączeniu słuchawki automatycznie przejdzie w tryb tryb parowania Bluetooth. 2. Wybierz „ED...

lang:pl score:32 filesize: 114.17 K page_count: 9 document date: 2024-12-06

EDIFIER

CE

EU DECLARATION OF CONFORMITY

1. Model No., trademark:

Trademark	EDIFIER
Model Name	EDF200168

2. Name and address of the manufacturer:

Name of the manufacturer	Edifier International Limited
Address	P.O. Box 6286, Shenzhen Futian District, China

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

Product Name	Model Name	Sales Name
Wireless Over-Ear Headphones with Active Noise Cancellation	EDF200168	WH700NB Pro

4. Object of the declaration:

Product Name	Model Name	Sales Name
Wireless Over-Ear Headphones with Active Noise Cancellation	EDF200168	WH700NB Pro

5. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation directive and Other Union harmonisation legislation where applicable:

EU Standard	EN 60950-1:2005, EN 60950-2:2005, EN 60950-3:2005, EN 60950-4:2005, EN 60950-5:2005, EN 60950-6:2005, EN 60950-7:2005, EN 60950-8:2005, EN 60950-9:2005, EN 60950-10:2005, EN 60950-11:2005, EN 60950-12:2005, EN 60950-13:2005, EN 60950-14:2005, EN 60950-15:2005, EN 60950-16:2005, EN 60950-17:2005, EN 60950-18:2005, EN 60950-19:2005, EN 60950-20:2005, EN 60950-21:2005, EN 60950-22:2005, EN 60950-23:2005, EN 60950-24:2005, EN 60950-25:2005, EN 60950-26:2005, EN 60950-27:2005, EN 60950-28:2005, EN 60950-29:2005, EN 60950-30:2005, EN 60950-31:2005, EN 60950-32:2005, EN 60950-33:2005, EN 60950-34:2005, EN 60950-35:2005, EN 60950-36:2005, EN 60950-37:2005, EN 60950-38:2005, EN 60950-39:2005, EN 60950-40:2005, EN 60950-41:2005, EN 60950-42:2005, EN 60950-43:2005, EN 60950-44:2005, EN 60950-45:2005, EN 60950-46:2005, EN 60950-47:2005, EN 60950-48:2005, EN 60950-49:2005, EN 60950-50:2005, EN 60950-51:2005, EN 60950-52:2005, EN 60950-53:2005, EN 60950-54:2005, EN 60950-55:2005, EN 60950-56:2005, EN 60950-57:2005, EN 60950-58:2005, EN 60950-59:2005, EN 60950-60:2005, EN 60950-61:2005, EN 60950-62:2005, EN 60950-63:2005, EN 60950-64:2005, EN 60950-65:2005, EN 60950-66:2005, EN 60950-67:2005, EN 60950-68:2005, EN 60950-69:2005, EN 60950-70:2005, EN 60950-71:2005, EN 60950-72:2005, EN 60950-73:2005, EN 60950-74:2005, EN 60950-75:2005, EN 60950-76:2005, EN 60950-77:2005, EN 60950-78:2005, EN 60950-79:2005, EN 60950-80:2005, EN 60950-81:2005, EN 60950-82:2005, EN 60950-83:2005, EN 60950-84:2005, EN 60950-85:2005, EN 60950-86:2005, EN 60950-87:2005, EN 60950-88:2005, EN 60950-89:2005, EN 60950-90:2005, EN 60950-91:2005, EN 60950-92:2005, EN 60950-93:2005, EN 60950-94:2005, EN 60950-95:2005, EN 60950-96:2005, EN 60950-97:2005, EN 60950-98:2005, EN 60950-99:2005, EN 60950-100:2005, EN 60950-101:2005, EN 60950-102:2005, EN 60950-103:2005, EN 60950-104:2005, EN 60950-105:2005, EN 60950-106:2005, EN 60950-107:2005, EN 60950-108:2005, EN 60950-109:2005, EN 60950-110:2005, EN 60950-111:2005, EN 60950-112:2005, EN 60950-113:2005, EN 60950-114:2005, EN 60950-115:2005, EN 60950-116:2005, EN 60950-117:2005, EN 60950-118:2005, EN 60950-119:2005, EN 60950-120:2005, EN 60950-121:2005, EN 60950-122:2005, EN 60950-123:2005, EN 60950-124:2005, EN 60950-125:2005, EN 60950-126:2005, EN 60950-127:2005, EN 60950-128:2005, EN 60950-129:2005, EN 60950-130:2005, EN 60950-131:2005, EN 60950-132:2005, EN 60950-133:2005, EN 60950-134:2005, EN 60950-135:2005, EN 60950-136:2005, EN 60950-137:2005, EN 60950-138:2005, EN 60950-139:2005, EN 60950-140:2005, EN 60950-141:2005, EN 60950-142:2005, EN 60950-143:2005, EN 60950-144:2005, EN 60950-145:2005, EN 60950-146:2005, EN 60950-147:2005, EN 60950-148:2005, EN 60950-149:2005, EN 60950-150:2005, EN 60950-151:2005, EN 60950-152:2005, EN 60950-153:2005, EN 60950-154:2005, EN 60950-155:2005, EN 60950-156:2005, EN 60950-157:2005, EN 60950-158:2005, EN 60950-159:2005, EN 60950-160:2005, EN 60950-161:2005, EN 60950-162:2005, EN 60950-163:2005, EN 60950-164:2005, EN 60950-165:2005, EN 60950-166:2005, EN 60950-167:2005, EN 60950-168:2005, EN 60950-169:2005, EN 60950-170:2005, EN 60950-171:2005, EN 60950-172:2005, EN 60950-173:2005, EN 60950-174:2005, EN 60950-175:2005, EN 60950-176:2005, EN 60950-177:2005, EN 60950-178:2005, EN 60950-179:2005, EN 60950-180:2005, EN 60950-181:2005, EN 60950-182:2005, EN 60950-183:2005, EN 60950-184:2005, EN 60950-185:2005, EN 60950-186:2005, EN 60950-187:2005, EN 60950-188:2005, EN 60950-189:2005, EN 60950-190:2005, EN 60950-191:2005, EN 60950-192:2005, EN 60950-193:2005, EN 60950-194:2005, EN 60950-195:2005, EN 60950-196:2005, EN 60950-197:2005, EN 60950-198:2005, EN 60950-199:2005, EN 60950-200:2005, EN 60950-201:2005, EN 60950-202:2005, EN 60950-203:2005, EN 60950-204:2005, EN 60950-205:2005, EN 60950-206:2005, EN 60950-207:2005, EN 60950-208:2005, EN 60950-209:2005, EN 60950-210:2005, EN 60950-211:2005, EN 60950-212:2005, EN 60950-213:2005, EN 60950-214:2005, EN 60950-215:2005, EN 60950-216:2005, EN 60950-217:2005, EN 60950-218:2005, EN 60950-219:2005, EN 60950-220:2005, EN 60950-221:2005, EN 60950-222:2005, EN 60950-223:2005, EN 60950-224:2005, EN 60950-225:2005, EN 60950-226:2005, EN 60950-227:2005, EN 60950-228:2005, EN 60950-229:2005, EN 60950-230:2005, EN 60950-231:2005, EN 60950-232:2005, EN 60950-233:2005, EN 60950-234:2005, EN 60950-235:2005, EN 60950-236:2005, EN 60950-237:2005, EN 60950-238:2005, EN 60950-239:2005, EN 60950-240:2005, EN 60950-241:2005, EN 60950-242:2005, EN 60950-243:2005, EN 60950-244:2005, EN 60950-245:2005, EN 60950-246:2005, EN 60950-247:2005, EN 60950-248:2005, EN 60950-249:2005, EN 60950-250:2005, EN 60950-251:2005, EN 60950-252:2005, EN 60950-253:2005, EN 60950-254:2005, EN 60950-255:2005, EN 60950-256:2005, EN 60950-257:2005, EN 60950-258:2005, EN 60950-259:2005, EN 60950-260:2005, EN 60950-261:2005, EN 60950-262:2005, EN 60950-263:2005, EN 60950-264:2005, EN 60950-265:2005, EN 60950-266:2005, EN 60950-267:2005, EN 60950-268:2005, EN 60950-269:2005, EN 60950-270:2005, EN 60950-271:2005, EN 60950-272:2005, EN 60950-273:2005, EN 60950-274:2005, EN 60950-275:2005, EN 60950-276:2005, EN 60950-277:2005, EN 60950-278:2005, EN 60950-279:2005, EN 60950-280:2005, EN 60950-281:2005, EN 60950-282:2005, EN 60950-283:2005, EN 60950-284:2005, EN 60950-285:2005, EN 60950-286:2005, EN 60950-287:2005, EN 60950-288:2005, EN 60950-289:2005, EN 60950-290:2005, EN 60950-291:2005, EN 60950-292:2005, EN 60950-293:2005, EN 60950-294:2005, EN 60950-295:2005, EN 60950-296:2005, EN 60950-297:2005, EN 60950-298:2005, EN 60950-299:2005, EN 60950-300:2005, EN 60950-301:2005, EN 60950-302:2005, EN 60950-303:2005, EN 60950-304:2005, EN 60950-305:2005, EN 60950-306:2005, EN 60950-307:2005, EN 60950-308:2005, EN 60950-309:2005, EN 60950-310:2005, EN 60950-311:2005, EN 60950-312:2005, EN 60950-313:2005, EN 60950-314:2005, EN 60950-315:2005, EN 60950-316:2005, EN 60950-317:2005, EN 60950-318:2005, EN 60950-319:2005, EN 60950-320:2005, EN 60950-321:2005, EN 60950-322:2005, EN 60950-323:2005, EN 60950-324:2005, EN 60950-325:2005, EN 60950-326:2005, EN 60950-327:2005, EN 60950-328:2005, EN 60950-329:2005, EN 60950-330:2005, EN 60950-331:2005, EN 60950-332:2005, EN 60950-333:2005, EN 60950-334:2005, EN 60950-335:2005, EN 60950-336:2005, EN 60950-337:2005, EN 60950-338:2005, EN 60950-339:2005, EN 60950-340:2005, EN 60950-341:2005, EN 60950-342:2005, EN 60950-343:2005, EN 60950-344:2005, EN 60950-345:2005, EN 60950-346:2005, EN 60950-347:2005, EN 60950-348:2005, EN 60950-349:2005, EN 60950-350:2005, EN 60950-351:2005, EN 60950-352:2005, EN 60950-353:2005, EN 60950-354:2005, EN 60950-355:2005, EN 60950-356:2005, EN 60950-357:2005, EN 60950-358:2005, EN 60950-359:2005, EN 60950-360:2005, EN 60950-361:2005, EN 60950-362:2005, EN 60950-363:2005, EN 60950-364:2005, EN 60950-365:2005, EN 60950-366:2005, EN 60950-367:2005, EN 60950-368:2005, EN 60950-369:2005, EN 60950-370:2005, EN 60950-371:2005, EN 60950-372:2005, EN 60950-373:2005, EN 60950-374:2005, EN 60950-375:2005, EN 60950-376:2005, EN 60950-377:2005, EN 60950-378:2005, EN 60950-379:2005, EN 60950-380:2005, EN 60950-381:2005, EN 60950-382:2005, EN 60950-383:2005, EN 60950-384:2005, EN 60950-385:2005, EN 60950-386:2005, EN 60950-387:2005, EN 60950-388:2005, EN 60950-389:2005, EN 60950-390:2005, EN 60950-391:2005, EN 60950-392:2005, EN 60950-393:2005, EN 60950-394:2005, EN 60950-395:2005, EN 60950-396:2005, EN 60950-397:2005, EN 60950-398:2005, EN 60950-399:2005, EN 60950-400:2005, EN 60950-401:2005, EN 60950-402:2005, EN 60950-403:2005, EN 60950-404:2005, EN 60950-405:2005, EN 60950-406:2005, EN 60950-407:2005, EN 60950-408:2005, EN 60950-409:2005, EN 60950-410:2005, EN 60950-411:2005, EN 60950-412:2005, EN 60950-413:2005, EN 60950-414:2005, EN 60950-415:2005, EN 60950-416:2005, EN 60950-417:2005, EN 60950-418:2005, EN 60950-419:2005, EN 60950-420:2005, EN 60950-421:2005, EN 60950-422:2005, EN 60950-423:2005, EN 60950-424:2005, EN 60950-425:2005, EN 60950-426:2005, EN 60950-427:2005, EN 60950-428:2005, EN 60950-429:2005, EN 60950-430:2005, EN 60950-431:2005, EN 60950-432:2005, EN 60950-433:2005, EN 60950-434:2005, EN 60950-435:2005, EN 60950-436:2005, EN 60950-437:2005, EN 60950-438:2005, EN 60950-439:2005, EN 60950-440:2005, EN 60950-441:2005, EN 60950-442:2005, EN 60950-443:2005, EN 60950-444:2005, EN 60950-445:2005, EN 60950-446:2005, EN 60950-447:2005, EN 60950-448:2005, EN 60950-449:2005, EN 60950-450:2005, EN 60950-451:2005, EN 60950-452:2005, EN 60950-453:2005, EN 60950-454:2005, EN 60950-455:2005, EN 60950-456:2005, EN 60950-457:2005, EN 60950-458:2005, EN 60950-459:2005, EN 60950-460:2005, EN 60950-461:2005, EN 60950-462:2005, EN 60950-463:2005, EN 60950-464:2005, EN 60950-465:2005, EN 60950-466:2005, EN 60950-467:2005, EN 60950-468:2005, EN 60950-469:2005, EN 60950-470:2005, EN 60950-471:2005, EN 60950-472:2005, EN 60950-473:2005, EN 60950-474:2005, EN 60950-475:2005, EN 60950-476:2005, EN 60950-477:2005, EN 60950-478:2005, EN 60950-479:2005, EN 60950-480:2005, EN 60950-481:2005, EN 60950-482:2005, EN 60950-483:2005, EN 60950-484:2005, EN 60950-485:2005, EN 60950-486:2005, EN 60950-487:2005, EN 60950-488:2005, EN 60950-489:2005, EN 60950-490:2005, EN 60950-491:2005, EN 60950-492:2005, EN 60950-493:2005, EN 60950-494:2005, EN 60950-495:2005, EN 60950-496:2005, EN 60950-497:2005, EN 60950-498:2005, EN 60950-499:2005, EN 60950-500:2005, EN 60950-501:2005, EN 60950-502:2005, EN 60950-503:2005, EN 60950-504:2005, EN 60950-505:2005, EN 60950-506:2005, EN 60950-507:2005, EN 60950-508:2005, EN 60950-509:2005, EN 60950-510:2005, EN 60950-511:2005, EN 60950-512:2005, EN 60950-513:2005, EN 60950-514:2005, EN 60950-515:2005, EN 60950-516:2005, EN 60950-517:2005, EN 60950-518:2005, EN 60950-519:2005, EN 60950-520:2005, EN 60950-521:2005, EN 60950-522:2005, EN 60950-523:2005, EN 60950-524:2005, EN 60950-525:2005, EN 60950-526:2005, EN 60950-527:2005, EN 60950-528:2005, EN 60950-529:2005, EN 60950-530:2005, EN 60950-531:2005, EN 60950-532:2005, EN 60950-533:2005, EN 60950-534:2005, EN 60950-535:2005, EN 60950-536:2005, EN 60950-537:2005, EN 60950-538:2005, EN 60950-539:2005, EN 60950-540:2005, EN 60950-541:2005, EN 60950-542:2005, EN 60950-543:2005, EN 60950-544:2005, EN 60950-545:2005, EN 60950-546:2005, EN 60950-547:2005, EN 60950-548:2005, EN 60950-549:2005, EN 60950-550:2005, EN 60950-551:2005, EN 60950-552:2005, EN 60950-553:2005, EN 60950-554:2005, EN 60950-555:2005, EN 60950-556:2005, EN 60950-557:2005, EN 60950-558:2005, EN 60950-559:2005, EN 60950-560:2005, EN 60950-561:2005, EN 60950-562:2005, EN 60950-563:2005, EN 60950-564:2005, EN 60950-565:2005, EN 60950-566:2005, EN 60950-567:2005, EN 60950-568:2005, EN 60950-569:2005, EN 60950-570:2005, EN 60950-571:2005, EN 60950-572:2005, EN 60950-573:2005, EN 60950-574:2005, EN 60950-575:2005, EN 60950-576:2005, EN 60950-577:2005, EN 60950-578:2005, EN 60950-579:2005, EN 60950-580:2005, EN 60950-581:2005, EN 60950-582:2005, EN 60950-583:2005, EN 60950-584:2005, EN 60950-585:2005, EN 60950-586:2005, EN 60950-587:2005, EN 60950-588:2005, EN 60950-589:2005, EN 60950-590:2005, EN 60950-591:2005, EN 60950-592:2005, EN 60950-593:2005, EN 60950-594:2005, EN 60950-595:2005, EN 60950-596:2005, EN 60950-597:2005, EN 60950-598:2005, EN 60950-599:2005, EN 60950-600:2005, EN 60950-601:2005, EN 60950-602:2005, EN 60950-603:2005, EN 60950-604:2005, EN 60950-605:2005, EN 60950-606:2005, EN 60950-607:
-------------	---

[\[pdf\]](#)

WH700NB26 V1.0 Bekijk de handleiding Edifier WH700NB Bluetooth Over ear ANC koptelefoon
Zwart bol original media s JREK47n8xAoo |||

NL Aan/uit zetten 1. Aan zetten: houd de -toets ongeveer 3 sec ingedrukt wanneer
UITgeschakeld t ... wanneer uitgeschakeld. De rode en de groene LEDlampjes
knipperen om de beurt. 2. Selecteer EDIFIER **WH700NB** in de instellingen van uw
apparaat om verbinding te maken. Het groene LED-lampje knippert t...

lang:nl score:30 filesize: 6.69 M page_count: 1 document date: 2023-11-01

tehnoteka

https://tehnoteka.rs

Uputstvo za upotrebu (EN)

EDIFIER slušalice W700NB plave

EDIFIER



Tehnoteka je online destinacija za upoređivanje cena i karakteristika bele tehnike, potrošačke elektronike i IT uređaja kod trgovinskih lanaca i internet prodavnica u Srbiji. Naša stranica vam omogućava da istražite najnovije informacije, detaljne karakteristike i konkurentne cene proizvoda.

Posećite nas i uživajte u ekskluzivnom iskustvu pametne kupovine klikom na link: <https://tehnoteka.rs/p/edifier-slusalice-w700nb-plave-akcija-cena/>

[pdf] User Manual

Uputstvo za upotrebu EN EDIFIER slušalice W700NB plave uputstvo en edifier slusalice w700nb 6703b83eda361 api tehnoteka rs 2024 10 |||

<https://tehnoteka.rs> Uputstvo za upotrebu EN EDIFIER slusalice W700NB plave Tehnoteka je online de ... metne kupovine klikom na link: <https://tehnoteka.rs/p/edifier-slusalice-w700nb-plave-akcija-cena/> **WH700NB** Wireless Noise Cancellation Over-Ear Headphones Manual EN 1. Power ON/OFF 3s Indicator 1....

lang:en score:28 filesize: 823.46 K page_count: 9 document date: 2024-10-07

INDEX

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

[pdf] User Manual

WH700NB26 V1 0 Edifier Global NAY Pokud neni phpajeni Bluetooth když jsou duchátka zapnutá a vremu potlačenihluku sluchátka se automaticky vypnou za 4 hodiny Duální připojení zařízení 2811869 cdn nay sk images orig 9 |||

For more information, please visit our website: www.edifier.com Edifierglobal Edifier_Global Edi ... rom actual product. If any difference is found, the actual product prevails. IB-200-WH700N-00 V1.0 **WH700NB** Wireless Noise Cancellation Over-Ear Headphones Manual EN Power ON/OFF 1. Power ON: press ...

lang:en score:25 filesize: 5.36 M page_count: 1 document date: 2023-08-25

[illegible]

EU DECLARATION OF CONFORMITY		
1. Model No. (reference):		
Product:	EDP105	
Model Name:	EDP105-06	
2. Name and address of the manufacturer:		
Edifier Technology Co., Ltd.		
Address: P.O. Box 626666, First Office Hong Kong		
This declaration of conformity is issued under the sole responsibility of the manufacturer.		
3. Object of the declaration		
Product Name:	Model Name:	Type Name:
Wireless Earbuds with Active Noise Cancellation	EDP105-06	W100002 Pro
The object of the declaration described above conforms with the relevant Union harmonization legislation drawn up and/or other Union harmonization legislation, where applicable:		
(a) European Directive 2014/53/EU (b) EMC Directive		
References to the relevant harmonized standards or the common specifications used or references to the other technical specifications in relation to which conformity is declared:		
EN 181852:2014-04-23 (EN 181852:2014-04-23) EN IEC 60330-3:2014-04-23 EN 10086-3:2014-04-23 (EN 10086-3:2014-04-23) EN 12191:2014-04-23 EN 4001:2014-04-23 (EN 4001:2014-04-23) EN 3001:2017-07-24 (EN 3001:2017-07-24) EN 3001:2017-07-24 (EN 3001:2017-07-24) EN 10479:2019-01-08 (EN 10479:2019-01-08)		
4. Signature of the manufacturer		
(a) Signature of the authorized representative of the manufacturer in the European Union: (b) Signature of the manufacturer	(a) Signature of the authorized representative of the manufacturer in the European Union: (b) Signature of the manufacturer	
Name: 181852-04-23 (EN 181852-04-23) Contact Person: Christopher Jiao Address: Box 626666, 1st Office (EN 181852-04-23) E-Mail: jiaoc@edifier.com		
Signature:		
Printed name: Li Jiaoping		
Position: Certification Center manager		
Place and date of issue: Dong-Guang, 2024-05-10		

EDIFIER					
EU DECLARATION OF CONFORMITY					
EU DECLARATION OF CONFORMITY					
1. Model No., trademark:					
Trademark: EDIFIER			Model Name: EDP-30180		
2. Name and address of the manufacturer:					
Name of the manufacturer: Edifier International Limited					
Address: P.O. Box 5556 Geneva Post Office Hong Kong					
3. This declaration of conformity is issued under the sole responsibility of the manufacturer.					
4. Object of the declaration					
Product Name: Wireless Ear Headphones with Active Noise Cancellation		Model Number: EDP-30180		VR-0008P-Ph	
5. The object of the declaration described above is in conformity with the relevant Union harmonization legislation applicable and other Union harmonization legislation where applicable:					
Radio Equipment Directive (2014/53/EU)					
Radio Directive					
6. References to the relevant harmonized standards or to the common specifications used or references to the other technical specifications in relation to which conformity is declared:					
Radio Equipment Directive					
EN ISO 9001:2015+2020 EN ISO 14001:2015+2021 EN ISO 45001:2018+2021 EN ISO 45001:2018+2021 EN ISO 9001:2015+2020 EN ISO 14001:2015+2021 EN ISO 45001:2018+2021 EN ISO 45001:2018+2021 EN ISO 9001:2015+2020 EN ISO 14001:2015+2021 EN ISO 45001:2018+2021 EN ISO 45001:2018+2021					
Radio Directive		Repetition of the same for Contact Harmonized Substances in Electrical and Electronic Equipment, 2011/65/EU Annex 2, EN 60950-1:2006, EN 60950-2:2006, EN 60950-3:2006, EN 60950-4:2006, EN 60950-5:2006, EN 60950-6:2006, EN 60950-7:2006, EN 60950-8:2006, EN 60950-9:2006, EN 60950-10:2006, EN 60950-11:2006, EN 60950-12:2006, EN 60950-13:2006, EN 60950-14:2006, EN 60950-15:2006, EN 60950-16:2006, EN 60950-17:2006, EN 60950-18:2006, EN 60950-19:2006, EN 60950-20:2006, EN 60950-21:2006, EN 60950-22:2006, EN 60950-23:2006, EN 60950-24:2006, EN 60950-25:2006, EN 60950-26:2006, EN 60950-27:2006, EN 60950-28:2006, EN 60950-29:2006, EN 60950-30:2006, EN 60950-31:2006, EN 60950-32:2006, EN 60950-33:2006, EN 60950-34:2006, EN 60950-35:2006, EN 60950-36:2006, EN 60950-37:2006, EN 60950-38:2006, EN 60950-39:2006, EN 60950-40:2006, EN 60950-41:2006, EN 60950-42:2006, EN 60950-43:2006, EN 60950-44:2006, EN 60950-45:2006, EN 60950-46:2006, EN 60950-47:2006, EN 60950-48:2006, EN 60950-49:2006, EN 60950-50:2006, EN 60950-51:2006, EN 60950-52:2006, EN 60950-53:2006, EN 60950-54:2006, EN 60950-55:2006, EN 60950-56:2006, EN 60950-57:2006, EN 60950-58:2006, EN 60950-59:2006, EN 60950-60:2006, EN 60950-61:2006, EN 60950-62:2006, EN 60950-63:2006, EN 60950-64:2006, EN 60950-65:2006, EN 60950-66:2006, EN 60950-67:2006, EN 60950-68:2006, EN 60950-69:2006, EN 60950-70:2006, EN 60950-71:2006, EN 60950-72:2006, EN 60950-73:2006, EN 60950-74:2006, EN 60950-75:2006, EN 60950-76:2006, EN 60950-77:2006, EN 60950-78:2006, EN 60950-79:2006, EN 60950-80:2006, EN 60950-81:2006, EN 60950-82:2006, EN 60950-83:2006, EN 60950-84:2006, EN 60950-85:2006, EN 60950-86:2006, EN 60950-87:2006, EN 60950-88:2006, EN 60950-89:2006, EN 60950-90:2006, EN 60950-91:2006, EN 60950-92:2006, EN 60950-93:2006, EN 60950-94:2006, EN 60950-95:2006, EN 60950-96:2006, EN 60950-97:2006, EN 60950-98:2006, EN 60950-99:2006, EN 60950-100:2006, EN 60950-101:2006, EN 60950-102:2006, EN 60950-103:2006, EN 60950-104:2006, EN 60950-105:2006, EN 60950-106:2006, EN 60950-107:2006, EN 60950-108:2006, EN 60950-109:2006, EN 60950-110:2006, EN 60950-111:2006, EN 60950-112:2006, EN 60950-113:2006, EN 60950-114:2006, EN 60950-115:2006, EN 60950-116:2006, EN 60950-117:2006, EN 60950-118:2006, EN 60950-119:2006, EN 60950-120:2006, EN 60950-121:2006, EN 60950-122:2006, EN 60950-123:2006, EN 60950-124:2006, EN 60950-125:2006, EN 60950-126:2006, EN 60950-127:2006, EN 60950-128:2006, EN 60950-129:2006, EN 60950-130:2006, EN 60950-131:2006, EN 60950-132:2006, EN 60950-133:2006, EN 60950-134:2006, EN 60950-135:2006, EN 60950-136:2006, EN 60950-137:2006, EN 60950-138:2006, EN 60950-139:2006, EN 60950-140:2006, EN 60950-141:2006, EN 60950-142:2006, EN 60950-143:2006, EN 60950-144:2006, EN 60950-145:2006, EN 60950-146:2006, EN 60950-147:2006, EN 60950-148:2006, EN 60950-149:2006, EN 60950-150:2006, EN 60950-151:2006, EN 60950-152:2006, EN 60950-153:2006, EN 60950-154:2006, EN 60950-155:2006, EN 60950-156:2006, EN 60950-157:2006, EN 60950-158:2006, EN 60950-159:2006, EN 60950-160:2006, EN 60950-161:2006, EN 60950-162:2006, EN 60950-163:2006, EN 60950-164:2006, EN 60950-165:2006, EN 60950-166:2006, EN 60950-167:2006, EN 60950-168:2006, EN 60950-169:2006, EN 60950-170:2006, EN 60950-171:2006, EN 60950-172:2006, EN 60950-173:2006, EN 60950-174:2006, EN 60950-175:2006, EN 60950-176:2006, EN 60950-177:2006, EN 60950-178:2006, EN 60950-179:2006, EN 60950-180:2006, EN 60950-181:2006, EN 60950-182:2006, EN 60950-183:2006, EN 60950-184:2006, EN 60950-185:2006, EN 60950-186:2006, EN 60950-187:2006, EN 60950-188:2006, EN 60950-189:			

[\[pdf\]](#) Specifications Declaration of Conformity

EC Declaration of Conformity Jerry Download EU Edifier 97180bca928783e64f89137c3bcbaa9c new

edifier us oss files 20250306 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER

Model Name EDF200126 2. Na ... roduct Name Product Model Sales Name Wireless

Noise Cancellation Over-Ear Headphones EDF200126 **WH700NB** 5. The object of the

declaration described above is in conformity with the relevant Union h...

lang:en score:25 filesize: 119.11 K page_count: 2 document date: 2025-03-06

[\[pdf\]](#) Specifications Declaration of Conformity

EC Declaration of Conformity Jerry Download EU Edifier a54c80d6e435bd2af3417f34940689c5 new

edifier us oss files 20240913 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER

Model Name EDF200168 2. Na ... me Model Name Sales Name Wireless Over-Ear

Headphones with Active Noise Cancellation EDF200168 **WH700NB** Pro 5. The object

of the declaration described above is in conformity with the relevant Uni...

lang:en score:25 filesize: 119.13 K page_count: 2 document date: 2024-09-13

[\[pdf\]](#) Specifications Decleration of Conformity

EC Declaration of Conformity Jerry Download EU Edifier 2c67828ec36cbfb01e2ce85dffdc8454 new

edifier us oss files 20250306 |||

EU DECLARATION OF CONFORMITY 1. Model No., trademark: Trademark EDIFIER

Model Name EDF200168 2. Na ... me Model Name Sales Name Wireless Over-Ear

Headphones with Active Noise Cancellation EDF200168 **WH700NB** Pro 5. The object

of the declaration described above is in conformity with the relevant Uni...

lang:en score:25 filesize: 114.85 K page count: 2 document date: 2025-03-06

[illegible]

Edifier WH700NB Pro EU Declaration of Conformity

This document is the EU Declaration of Conformity for Edifier's WH700NB Pro Wireless Over-Ear Headphones with Active Noise Cancellation, confirming compliance with relevant EU directives and harmonized standards.

lang:en score:25 filesize: 114.54 K page_count: 2 document date: 2025-07-08

EU DECLARATION OF CONFORMITY			
WITH BELOW LISTED COMMUNITY LEGISLATION AND HARMONIZED STANDARDS TO SATISFY THE SAFETY, QUALITY AND REGULATORY REQUIREMENTS OF THE ABOVE SPECIFIED PRODUCT			
Name of the manufacturer:		Seller: <u>Remondini s.r.l.</u>	
Address:		P.O. 40020 Corniglio (PV) - Italy, Italy, Italy	
We, <u>Remondini International Limited</u> , declare under our sole responsibility that following product:			
Tubefix		Product Name:	Model Name:
EDOT-IT		Variant Name/Configuration:	EEC/CEC/UK/US/CHINA:
		Over: <u>Car Park Workbenches</u>	
has been tested and complies with the <u>European Standard</u> herein specified:			
EN 1052:2001 (EN 1052:2001)			
Article 3 to 1 (a) EN 1052:2001			
Article 3 to 1 (b) EN 1052:2001			
Article 3 to 1 (c) EN 1052:2001			
Article 3 to 1 (d) EN 1052:2001			
Article 3 to 1 (e) EN 1052:2001			
Article 3 to 1 (f) EN 1052:2001			
Article 3 to 1 (g) EN 1052:2001			
Article 3 to 1 (h) EN 1052:2001			
Article 3 to 1 (i) EN 1052:2001			
Article 3 to 1 (j) EN 1052:2001			
Article 3 to 1 (k) EN 1052:2001			
Article 3 to 1 (l) EN 1052:2001			
Article 3 to 1 (m) EN 1052:2001			
Article 3 to 1 (n) EN 1052:2001			
Article 3 to 1 (o) EN 1052:2001			
Article 3 to 1 (p) EN 1052:2001			
Article 3 to 1 (q) EN 1052:2001			
Article 3 to 1 (r) EN 1052:2001			
Article 3 to 1 (s) EN 1052:2001			
Article 3 to 1 (t) EN 1052:2001			
Article 3 to 1 (u) EN 1052:2001			
Article 3 to 1 (v) EN 1052:2001			
Article 3 to 1 (w) EN 1052:2001			
Article 3 to 1 (x) EN 1052:2001			
Article 3 to 1 (y) EN 1052:2001			
Article 3 to 1 (z) EN 1052:2001			
Article 3 to 1 (aa) EN 1052:2001			
Article 3 to 1 (ab) EN 1052:2001			
Article 3 to 1 (ac) EN 1052:2001			
Article 3 to 1 (ad) EN 1052:2001			
Article 3 to 1 (ae) EN 1052:2001			
Article 3 to 1 (af) EN 1052:2001			
Article 3 to 1 (ag) EN 1052:2001			
Article 3 to 1 (ah) EN 1052:2001			
Article 3 to 1 (ai) EN 1052:2001			
Article 3 to 1 (aj) EN 1052:2001			
Article 3 to 1 (ak) EN 1052:2001			
Article 3 to 1 (al) EN 1052:2001			
Article 3 to 1 (am) EN 1052:2001			
Article 3 to 1 (an) EN 1052:2001			
Article 3 to 1 (ao) EN 1052:2001			
Article 3 to 1 (ap) EN 1052:2001			
Article 3 to 1 (aq) EN 1052:2001			
Article 3 to 1 (ar) EN 1052:2001			
Article 3 to 1 (as) EN 1052:2001			
Article 3 to 1 (at) EN 1052:2001			
Article 3 to 1 (au) EN 1052:2001			
Article 3 to 1 (av) EN 1052:2001			
Article 3 to 1 (aw) EN 1052:2001			
Article 3 to 1 (ax) EN 1052:2001			
Article 3 to 1 (ay) EN 1052:2001			
Article 3 to 1 (az) EN 1052:2001			
Article 3 to 1 (ba) EN 1052:2001			
Article 3 to 1 (bb) EN 1052:2001			
Article 3 to 1 (bc) EN 1052:2001			
Article 3 to 1 (bd) EN 1052:2001			
Article 3 to 1 (be) EN 1052:2001			
Article 3 to 1 (bf) EN 1052:2001			
Article 3 to 1 (bg) EN 1052:2001			
Article 3 to 1 (bh) EN 1052:2001			
Article 3 to 1 (bi) EN 1052:2001			
Article 3 to 1 (bj) EN 1052:2001			
Article 3 to 1 (bk) EN 1052:2001			
Article 3 to 1 (bl) EN 1052:2001			
Article 3 to 1 (bm) EN 1052:2001			
Article 3 to 1 (bn) EN 1052:2001			
Article 3 to 1 (bo) EN 1052:2001			
Article 3 to 1 (bp) EN 1052:2001			
Article 3 to 1 (bq) EN 1052:2001			
Article 3 to 1 (br) EN 1052:2001			
Article 3 to 1 (bs) EN 1052:2001			
Article 3 to 1 (bt) EN 1052:2001			
Article 3 to 1 (bu) EN 1052:2001			
Article 3 to 1 (bv) EN 1052:2001			
Article 3 to 1 (bw) EN 1052:2001			
Article 3 to 1 (bx) EN 1052:2001			
Article 3 to 1 (by) EN 1052:2001			
Article 3 to 1 (bz) EN 1052:2001			
Article 3 to 1 (ca) EN 1052:2001			
Article 3 to 1 (cb) EN 1052:2001			
Article 3 to 1 (cc) EN 1052:2001			
Article 3 to 1 (cd) EN 1052:2001			
Article 3 to 1 (ce) EN 1052:2001			
Article 3 to 1 (cf) EN 1052:2001			
Article 3 to 1 (cg) EN 1052:2001			
Article 3 to 1 (ch) EN 1052:2001			
Article 3 to 1 (ci) EN 1052:2001			
Article 3 to 1 (cj) EN 1052:2001			
Article 3 to 1 (ck) EN 1052:2001			
Article 3 to 1 (cl) EN 1052:2001			
Article 3 to 1 (cm) EN 1052:2001			
Article 3 to 1 (cn) EN 1052:2001			
Article 3 to 1 (co) EN 1052:2001			
Article 3 to 1 (cp) EN 1052:2001			
Article 3 to 1 (cq) EN 1052:2001			
Article 3 to 1 (cr) EN 1052:2001			
Article 3 to 1 (cs) EN 1052:2001			
Article 3 to 1 (ct) EN 1052:2001			
Article 3 to 1 (cu) EN 1052:2001			
Article 3 to 1 (cv) EN 1052:2001			
Article 3 to 1 (cw) EN 1052:2001			
Article 3 to 1 (cx) EN 1052:2001			
Article 3 to 1 (cy) EN 1			

[\[pdf\]](#) Decleration of Conformity

Download EU Declaration of Conformity Edifier fd3eb848b1606bcd90aa697cc9761a2a new edifier us
oss files 20240312 |||

DEKLARACJA ZGODNOCI UE Z WYMIENIONYMI PONIEJ PRZEPISAMI
WSPLNOTOWYMI I NORMAMI ZHARMONIZOWANYMI, A ... wy Nazwa produktu
Nazwa modelu EDIFIER Wireless Noise Cancellation OveEarHeadphones
EDF200126 **WH700NB** zostal przetestowany i jest zgodny z norm europejsk okrelon
w niniejszym dokumencie: Dyre...

lang:pl score:25 filesize: 223.77 K page_count: 2 document date: 2024-03-12


EU DECLARATION OF CONFORMITY WE HEREBY DECLARED THAT THE FOLLOWING PRODUCT IS IN CONFORMITY WITH THE EUROPEAN STANDARDS AND HARMONIZED STANDARDS TO SATISFY THE SAFETY, QUALITY AND REGULATORY REQUIREMENTS OF THE BELOW SPECIFIED PRODUCT																														
Name of the manufacturer		Eifferr International Limited																												
Address		P.O. Box 83268 Newpark Past Office Hong Kong																												
We, Eifferr International Limited, declare under our sole responsibility that following product: <table border="1" style="width: 100%;"> <tr> <th>Trademark</th> <th>Product Name</th> <th>Model Name</th> </tr> <tr> <td>ESP-IFR</td> <td>Wireless Remote Car-Activation</td> <td>ESP7250120 (W/30M3)</td> </tr> </table>				Trademark	Product Name	Model Name	ESP-IFR	Wireless Remote Car-Activation	ESP7250120 (W/30M3)																					
Trademark	Product Name	Model Name																												
ESP-IFR	Wireless Remote Car-Activation	ESP7250120 (W/30M3)																												
has been tested and complies with the European Standard herein specified: <table border="1" style="width: 100%;"> <tr> <th colspan="2">Radio Equipment Directive</th> <th>2014/53/EU</th> </tr> <tr> <td>Article 3.1.a. Annex</td> <td colspan="2">EN 62369-2:2010</td> </tr> <tr> <td>Article 3.1.a. Annex</td> <td>EN 62369-3:2014:4.11</td> <td></td> </tr> <tr> <td></td> <td>EN 50103:2010 (V4.1)</td> <td></td> </tr> <tr> <td></td> <td>EN 501032:2017 (V4.1)</td> <td></td> </tr> <tr> <td>Article 3.1.b. EMC</td> <td colspan="2"></td> </tr> <tr> <td></td> <td>EN 301488-1 V2.2.2</td> <td></td> </tr> <tr> <td></td> <td>EN 301488-1 V2.2.2-4</td> <td></td> </tr> <tr> <td>Article 3.2 Radio Spectrum</td> <td colspan="2">EN 300328 V2.2.2</td> </tr> </table>				Radio Equipment Directive		2014/53/EU	Article 3.1.a. Annex	EN 62369-2:2010		Article 3.1.a. Annex	EN 62369-3:2014:4.11			EN 50103:2010 (V4.1)			EN 501032:2017 (V4.1)		Article 3.1.b. EMC				EN 301488-1 V2.2.2			EN 301488-1 V2.2.2-4		Article 3.2 Radio Spectrum	EN 300328 V2.2.2	
Radio Equipment Directive		2014/53/EU																												
Article 3.1.a. Annex	EN 62369-2:2010																													
Article 3.1.a. Annex	EN 62369-3:2014:4.11																													
	EN 50103:2010 (V4.1)																													
	EN 501032:2017 (V4.1)																													
Article 3.1.b. EMC																														
	EN 301488-1 V2.2.2																													
	EN 301488-1 V2.2.2-4																													
Article 3.2 Radio Spectrum	EN 300328 V2.2.2																													
Signature:  Printed name: U. Lamking Position: Certification Center manager Place and date of issue: Dongguan 2023-06																														

[\[pdf\]](#) Decleration of Conformity

EC Declaration of Conformity Jerry 692b4570e4b4b5e29a11314da42427d5 new edifier us oss files
20231030 |||

EU DECLARATION OF CONFORMITY WITH BELOW LISTED COMMUNITY
LEGISLATION AND HARMONIZED STANDARDS TO SAT ... ark Product Name
Model Name EDIFIER Wireless Noise Cancellation Over-Ear Headphones
EDF200126 **WH700NB** has been tested and complies with the European Standard
herein specified: Radio Equipment...

lang:en score:24 filesize: 55.61 K page_count: 1 document date: 2023-10-30

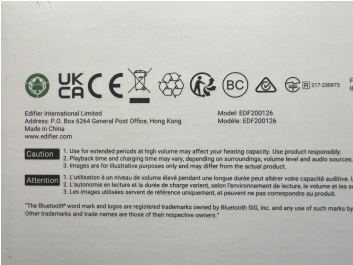

[\[pdf\]](#)

Bekijk de CE markering Edifier WH700NB Bluetooth Over ear ANC koptelefoon Zwart bol original media s
7kDyx8GG8KmO |||

...

lang:no score:13 filesize: 2.07 M page_count: 1 document date: 2024-01-12