

Newday ND-60-1015WT-DE

Newday 153cm Ceiling Fan with Light and Remote Control

Model: ND-60-1015WT-DE

1. IMPORTANT SAFETY INFORMATION

Please read all instructions carefully before installation and use. Retain this manual for future reference.

- Ensure the power supply is disconnected before installation, cleaning, or maintenance.
- Installation must be performed by a qualified electrician and in accordance with local wiring regulations.
- The mounting structure must be capable of supporting the weight of the fan (approximately 10 kg) and the dynamic load during operation.
- Do not insert any objects into the fan blades while the fan is operating.
- This fan is designed for indoor use only.
- Keep children away from the fan during operation.

2. PRODUCT OVERVIEW

The Newday 153cm Ceiling Fan (Model ND-60-1015WT-DE) is a modern ceiling fan with an integrated LED light, designed for efficient air circulation and adjustable illumination. It features a silent DC motor and is controlled via a remote.

Key Features:

- **Size:** 153 cm diameter, 36 cm height.
- **Weight:** 8.8 KG total.
- **Motor:** Silent and durable DC motor.
- **Blades:** 5 ABS plastic blades, resistant to deformation.
- **Speeds:** 6 fan speeds (92-163 RPM) plus a sleep mode.
- **Light:** 24W LED panel with continuous brightness adjustment (20%-100%) and color temperature adjustment (3000K-6500K).
- **Control:** Easy-to-use remote control with wall mount.
- **Modes:** Summer (downward airflow) and Winter (upward airflow) modes.
- **Timer:** 1, 3, or 6-hour timer function.

Comparaison des Pales de Ventilateur

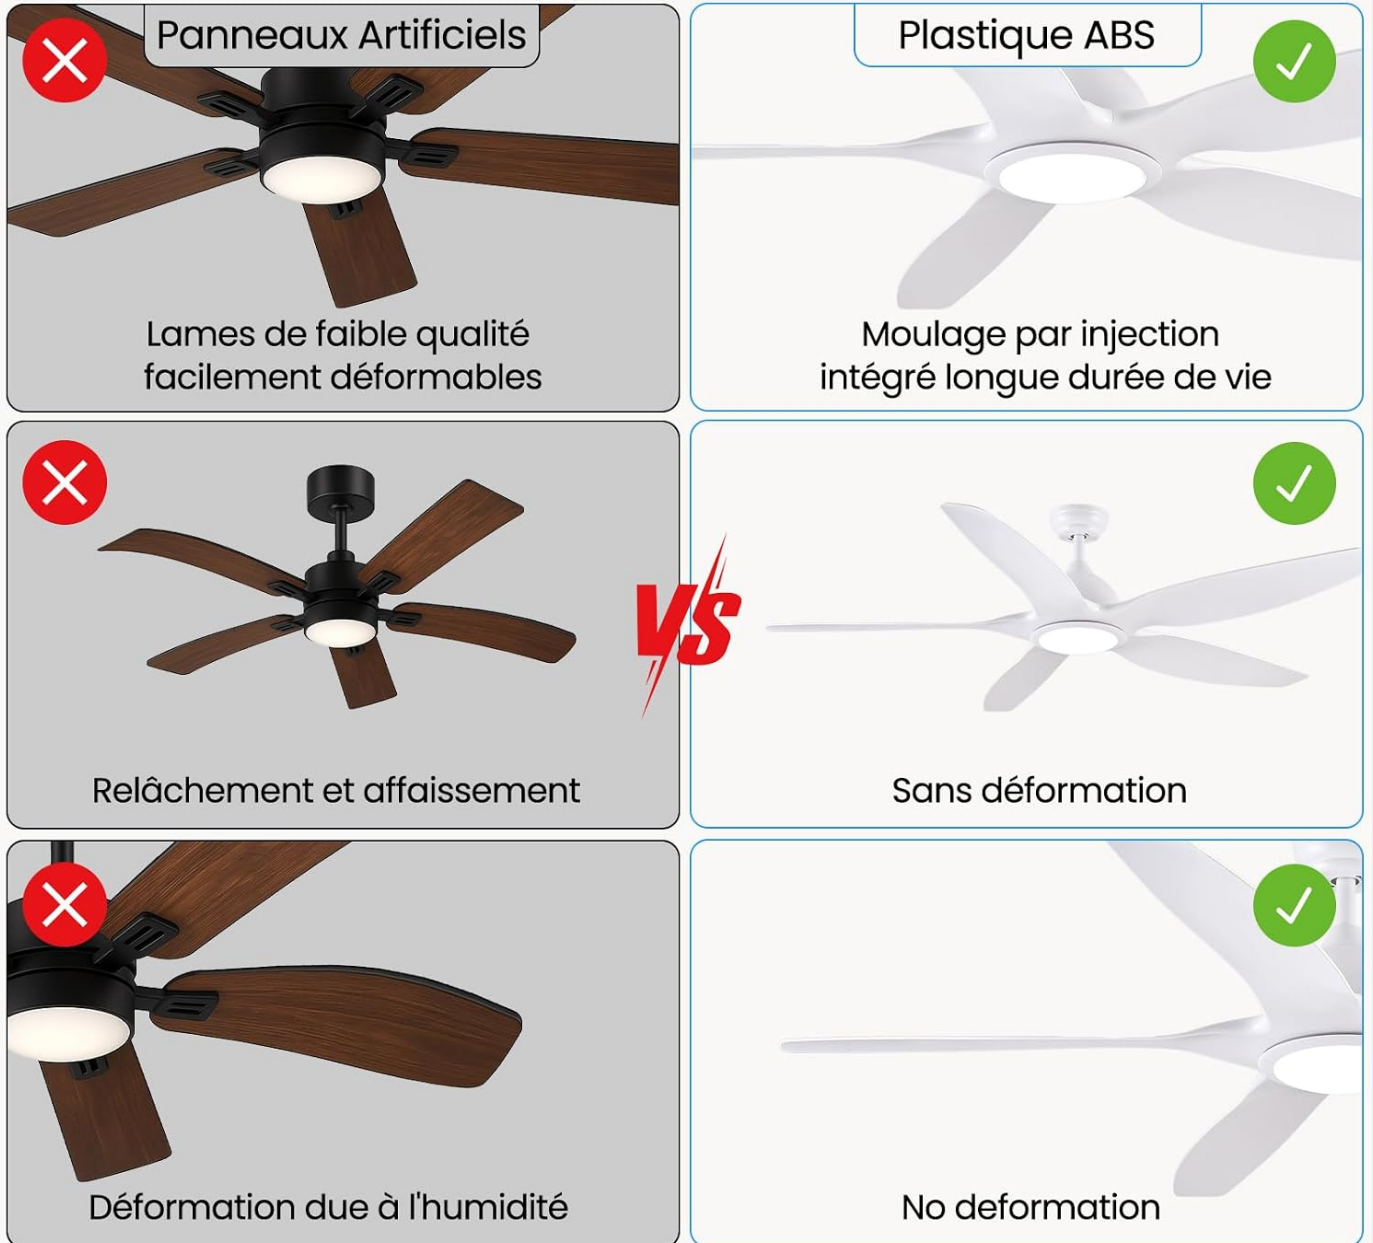


Image 2.1: The Newday 153cm white ceiling fan with integrated LED light.

3. SETUP AND INSTALLATION

Installation requires careful attention to detail. It is recommended to have two people for installation and to consult a qualified electrician if you are unsure.

Pre-Installation Checks:

- Verify that the ceiling can support the fan's weight and operational forces.
- Ensure the maximum ceiling slope does not exceed 15°.
- Confirm all components are present before beginning.

Installation Steps:

1. Turn off power at the main circuit breaker.
2. Mount the ceiling bracket securely to a joist or suitable support structure.

3. Assemble the fan motor and downrod (if applicable) according to the detailed diagrams in the included paper manual.
4. Connect the electrical wiring, ensuring correct polarity and secure connections.
5. Attach the fan assembly to the ceiling bracket.
6. Install the fan blades, ensuring they are firmly attached.
7. Install the LED light panel and diffuser. Note: The light kit is pre-installed with the lampshade and LED panel.
8. Restore power and test the fan and light functions.



Image 3.1: Diagram showing fan dimensions (153cm diameter, 39cm height from ceiling to bottom of light, 12.5cm from ceiling to top of blades) and suitable room sizes (16-36m²), along with flat installation and maximum 15° slope.

For a visual guide, an installation video is available:

Your browser does not support the video tag.

Video 3.1: Official installation guide for the Newday ceiling fan. This video demonstrates the assembly and mounting process.

4. OPERATING INSTRUCTIONS

The Newday ceiling fan is operated using the included remote control.

Remote Control Functions:

- **Light ON/OFF:** Press the 'Light On' or 'Light Off' button.
- **Fan ON/OFF:** Press the central fan button.
- **Fan Speed (1-6):** Press buttons '1' through '6' to select desired fan speed.
- **Sleep Mode:** In sleep mode, speeds 1, 2, and 3 will cycle every 20 seconds to simulate natural wind.
- **Color Temperature Adjustment:**
 - Press 'WW' for warm light. Long press 'WW' to gradually decrease color temperature (towards 3000K).
 - Press 'DW' for cool light. Long press 'DW' to gradually increase color temperature (towards 6500K).
 - Press 'NW' for natural white light (4200K).
- **Brightness Adjustment:** Press '+' to increase brightness and '-' to decrease brightness continuously (20%-100%).
- **Timer:** Press '1H', '3H', or '6H' to set the fan to turn off after 1, 3, or 6 hours respectively. Note: If you use the remote control after setting the timer, the timer function will be automatically canceled.
- **Summer/Winter Mode (Reverse Function):** Press the reverse button (often indicated by a circular arrow icon). The fan will slowly stop and then begin rotating in the opposite direction. In summer, the fan rotates counter-clockwise for downward airflow. In winter, it rotates clockwise for upward airflow to balance room heating.





Réglable à 6 Vitesses

Volume d'air Maximum: 8000 CFM

 Vent lent Vent Confortable 92-109RPM (7-10W) 1-2 	 Moyen Vent Naturel 121-137RPM (12-14W) 3-4 	 Rapide Refroidissement du Vent 152-163RPM (15-16W) 5-6 
---	--	---

Image 4.1: Illustration of the remote control and its various functions, including fan speed, light control, color temperature, and timer settings.



Image 4.2: Visual explanation of the reversible function, showing downward airflow for cooling in summer and upward airflow for heat distribution in winter.

5. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** To clean the fan, wipe with a soft, damp cloth. Do not use abrasive cleaners or solvents. Ensure the power is off before cleaning.
- **Blade Inspection:** Periodically check the fan blades for any signs of damage or loosening. Tighten screws if necessary.
- **Light Source:** The integrated LED light panel has a long lifespan (30,000 hours). If replacement is ever needed, contact customer support.

6. TROUBLESHOOTING

If you encounter any issues with your Newday ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not operate.	No power; remote control battery low; remote not paired.	Check circuit breaker; replace remote batteries; re-pair remote control (refer to remote pairing instructions in the full manual).
Light does not turn on.	No power; LED panel issue.	Check power supply; contact customer support if LED panel is faulty.
Fan makes excessive noise.	Loose blades; unbalanced blades; loose mounting.	Ensure all blade screws are tight; check for balanced blades; verify secure ceiling mounting.
Remote control not responding.	Low battery; interference; remote not paired.	Replace remote batteries; ensure no obstructions; re-pair remote.

If the problem persists after attempting these solutions, please contact Newday customer support.

7. SPECIFICATIONS

Feature	Specification
Brand	Newday
Model Number	ND-60-1015WT-DE
Color	White
Material	Acrylic, Acrylonitrile Butadiene Styrene (ABS), Metal
Dimensions (L x W x H)	153L x 153W x 35H centimeters
Item Weight	10 Kilograms
Fan Speeds	6 speeds (92, 109, 121, 137, 152, 163 RPM)
Maximum Air Volume	8000 CFM
Light Type	Integrated LED
Light Wattage	24 Watts
Luminous Efficacy	1560 Lumens
Color Temperature	Adjustable: 3000K (Warm White), 4200K (Natural White), 6500K (Cool White)
Brightness Adjustment	20% - 100% continuous dimming
Control Method	Remote Control
Timer Functions	1, 3, 6 hours
Voltage	220 Volts
Max Ceiling Slope	15°
Indoor/Outdoor Use	Indoor Use Only

8. WARRANTY AND SUPPORT

Newday is committed to providing reliable products and excellent customer service.

- **Warranty:** This product comes with a 2-year warranty.
- **Customer Support:** For any assistance with your ceiling fan, please contact Newday customer service. We aim to provide support within 24 hours and offer the best possible solution.



Image 8.1: Newday customer service information, highlighting 24-hour support and a 2-year warranty.