Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

LENCENT PA055B-65W

LENCENT 65W GaN International Travel Adapter User Manual

Model: PA055B-65W

1. Safety Information

Please read all safety instructions carefully before using this product. Failure to follow these instructions may result in electric shock, fire, or damage to the product or connected devices.

- **Important Note:** This adapter is **NOT a voltage converter**. It does not convert voltage from 100V-250V. Ensure your devices are compatible with the local voltage (100V-250V) before use. High-power appliances like hair dryers or straighteners may require a separate voltage converter.
- Do not expose the adapter to liquids, moisture, or extreme temperatures.
- Do not disassemble, modify, or attempt to repair the adapter. Refer all servicing to qualified personnel.
- Equipped with a 6-point safety system, including overload fuse, fireproof material, and short-circuit protection, this adapter ensures safe charging for all devices.
- Use only with appliances rated for 100V-250V AC. Maximum power output is 2500W (10A max).

2. Product Overview

The LENCENT 65W GaN International Travel Adapter is a compact and efficient charging solution designed for global travelers. It features multiple USB ports and universal AC outlets to charge a variety of devices simultaneously.

Key Features:

- **65W USB-C Fast Charging:** Delivers up to 65W via the USB-C3 port, capable of fast charging phones, tablets, and USB-C notebooks.
- **Advanced GaN III Technology:** Utilizes Gallium Nitride (GaN) technology for a smaller, more efficient design with reduced heat generation.

- **Worldwide Compatibility:** Supports plug types for over 200 countries, including Type C (Europe), Type G (UK), Type I (Australia/China), and Type A (USA/Japan).
- **Multi-Port Design:** Equipped with 2 USB-A ports and 3 USB-C ports for versatile charging options.
- **Multi Safety Protection:** Incorporates a comprehensive safety system for secure charging.

Product Diagram:



Image: The LENCENT 65W GaN International Travel Adapter, displaying its two USB-A ports, three USB-C ports, and the universal AC outlet on the top surface.

3. Setup Instructions

To use your LENCENT International Travel Adapter, select the appropriate plug type for your destination by sliding the corresponding pins out from the adapter body.

Selecting the Correct Plug:

1. **Type A (USA/Japan/Canada):** Slide the 'USA/AUS' slider to extend the two flat parallel pins.
2. **Type I (Australia/China/New Zealand):** Slide the 'USA/AUS' slider to extend the two flat parallel pins, then rotate them to form a V-shape.

3. **Type C (Most of Europe, Germany, France, Italy, Spain):** Slide the 'EU' slider to extend the two round pins.
4. **Type G (UK, Ireland, London, Scotland, Dubai):** Slide the 'UK' slider to extend the three rectangular pins.

Once the correct pins are extended, firmly insert the adapter into the wall outlet.



Image: A visual guide illustrating the four main plug types (EU Type C, UK Type G, US Type A, and AUS Type I) that can be deployed from the LENCENT Universal Travel Adapter.

4. Operating Instructions

This adapter allows you to charge multiple devices simultaneously using its various ports and the universal AC outlet.

Charging Devices:

- **USB-C Ports (C1, C2, C3):** Connect your USB-C compatible devices (phones, tablets, laptops) to any of the three USB-C ports. The USB-C3 port supports up to 65W Power Delivery for faster charging of high-power devices like MacBooks or larger tablets.
- **USB-A Ports (A1, A2):** Connect your standard USB-A devices (older phones, power banks, smartwatches) to these ports.
- **Universal AC Outlet:** Plug in any compatible electrical appliance (within the 100V-250V range and 2500W max) directly into the universal AC outlet on the front of the adapter.

The adapter's smart charging technology optimizes power output for each connected device, ensuring efficient and safe charging.



Image: The LENCENT 65W travel adapter plugged into a wall outlet, with a USB-C cable connected to a smartphone, demonstrating its high-speed charging capability.

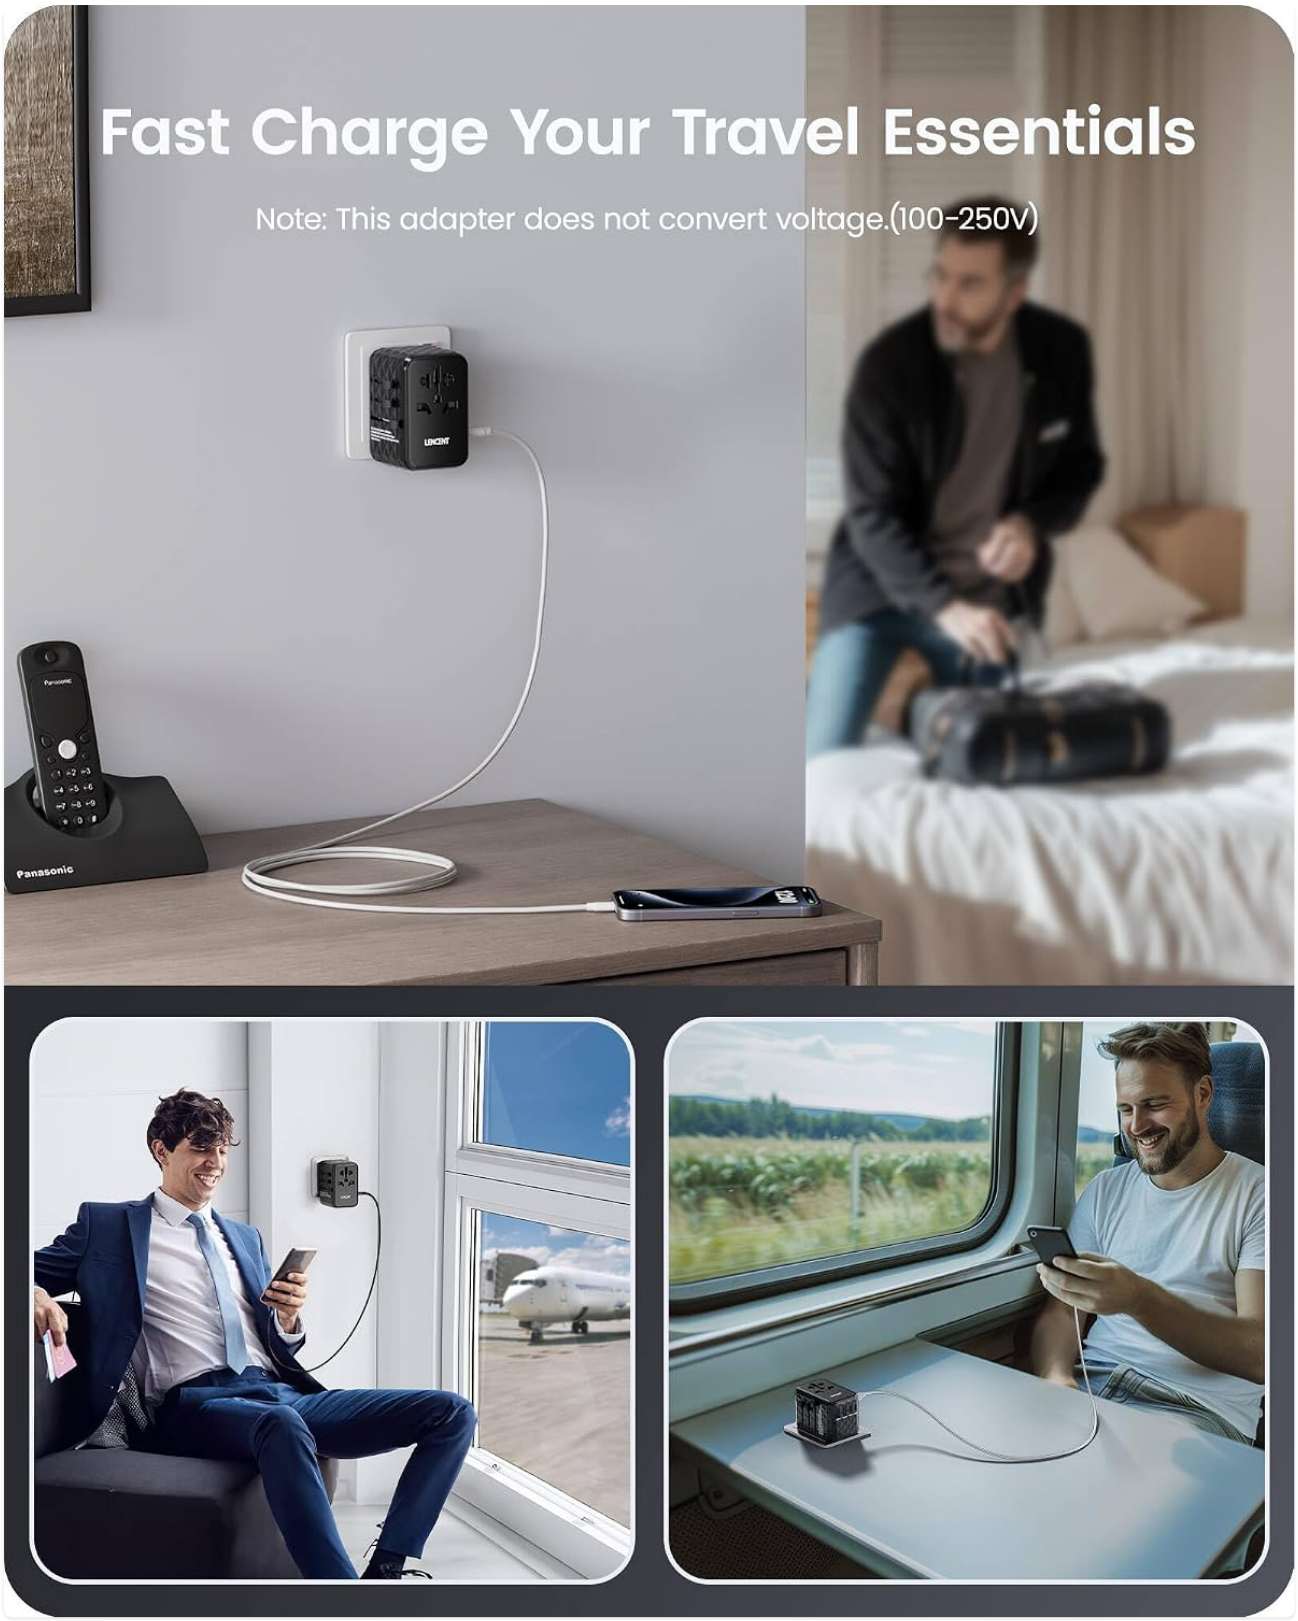

Image: The LENCENT travel adapter connected to six different electronic devices (laptops, phones, earbuds), illustrating its ability to charge multiple devices at once.

5. Maintenance

Proper maintenance ensures the longevity and safe operation of your travel adapter.

- Keep the adapter clean and dry. Avoid contact with water or other liquids.

- Clean the surface with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Store the adapter in a cool, dry place when not in use.
- Avoid dropping the adapter or subjecting it to strong impacts.

6. Troubleshooting

If you encounter issues with your LENCENT travel adapter, refer to the following common solutions:

- **Device not charging:**
  - Ensure the adapter is firmly plugged into a live wall outlet.
  - Check if the device's charging cable is securely connected to both the adapter and the device.
  - Verify that your device is compatible with the adapter's voltage range (100V-250V).
  - Test with a different cable or device to rule out cable or device issues.
- **Slow charging:**
  - Ensure you are using the correct USB-C port for fast charging (USB-C3 for 65W).
  - Check if your device and cable support fast charging protocols (PD 3.0, QC4.0, PPS).
  - Charging multiple devices simultaneously may reduce the individual output of some ports. Try charging fewer devices.
- **Adapter not working (no power indicator):**
  - The adapter has a built-in 10A overload fuse. If the adapter stops working, the fuse may have blown due to an overload. Replace the fuse with a spare (usually located in a small compartment on the adapter).
  - Ensure the wall outlet is functioning correctly by testing it with another device.



Image: An illustration highlighting the 10A fuse compartment and indicating the adapter's short-circuit and over-temperature protection features.

7. Specifications

Feature	Specification
Model Number	PA055B-65W
Product Dimensions	3.03 x 2.13 x 2.13 inches
Item Weight	6.3 ounces (180 Grams)
Input Voltage	100-250 Volts AC, 50/60Hz
Max AC Power Output	2500W (10A Max)
USB-C1/C2 Output	5V=3A, 9V=1.67A, 12V=1.25A (15W Max)
USB-C3 Output	5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A (65W Max)
USB-A1/A2 Output	5V=2.4A (12W Max)
Total DC Output	65W Max
Supported Protocols	USB PD 3.0, QC4.0, PPS
Color	Black

8. Warranty and Support

LENCENT products are manufactured to high-quality standards and are backed by a manufacturer's warranty. For specific warranty details, including duration and coverage, please refer to the warranty card included with your product or visit the official LENCENT website.

If you require technical assistance, troubleshooting beyond this manual, or have questions regarding your product, please contact LENCENT customer support through the contact information provided on the product packaging or the official LENCENT website.

Online Resources:

- LENCENT Official Store: Visit LENCENT Store on Amazon

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CH4JGK5L

More documents and user manuals: **https://manuals.plus/**