

[Manuals.plus](#) /

› [EASYWORC](#) /

› EASYWORC Frameless Pivot Shower Door 24-26 W x 72 H Instruction Manual

EASYWORC SDoor-S9301-2672-BK-EW-01

EASYWORC Frameless Pivot Shower Door Instruction Manual

Model: SDoor-S9301-2672-BK-EW-01

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your EASYWORC Frameless Pivot Shower Door. This model features 1/4" (6mm) tempered glass with a nano explosion-proof film, a reversible installation design, and a sleek matte black finish. Please read all instructions carefully before beginning installation or use to ensure proper function and safety.

Smart Pivot for Shower Doors

— Smooth & Waterproof

Lifts to Open — Silent & Effortless

RAISE UP

Seals to Close — Perfect & Leak-Proof

LOWER
DOWN

Image: Safety comparison of glass types, highlighting the anti-explosion film on EASYWORC tempered glass.

SETUP AND INSTALLATION

Proper installation is crucial for the functionality and longevity of your shower door. It is recommended to have two people for installation. Ensure all parts are present and undamaged before starting.

Tools Required (Not Included):

- Drill
- Screwdriver
- Measuring Tape
- Level
- Pencil/Marker
- Caulk Gun and Silicone Sealant

Installation Steps:

1. **Prepare the Opening:** Ensure your shower opening is within the specified width range of 24" to 26" and the height is 72". The surface must be level and plumb.
2. **Mark Wall Jamb Positions:** Place the wall jambs against the shower wall. Use a level to ensure they are perfectly vertical. Mark the drilling points for the screws.
3. **Drill Holes and Secure Wall Jambs:** Drill holes at the marked positions. Insert wall anchors if necessary. Secure the wall jambs to the wall using appropriate screws.



Image: Marking and drilling points for securing the wall jambs.

4. **Install Bottom Lifting Shaft:** Attach the bottom lifting shaft to the bottom of the shower door frame. Ensure the spring plunger mechanism is correctly oriented.
5. **Install Top Lifting Shaft:** Attach the top lifting shaft to the top of the shower door frame.
6. **Mount the Shower Door:** Carefully lift the shower door and align the top and bottom lifting shafts with their respective receivers on the wall jambs. Lower the door into place.

When Glass Breaks



Image: Detail of the smart pivot mechanism, illustrating how the door lifts to open and lowers to seal.

- 7. Adjust Width (if necessary):** The door allows for a maximum adjustment of 1 inch on each side. Adjust the wall jambs as needed to achieve a perfect fit.

Width Adjustable On Both Sides

A maximum adjustment of **1 inch** on each side

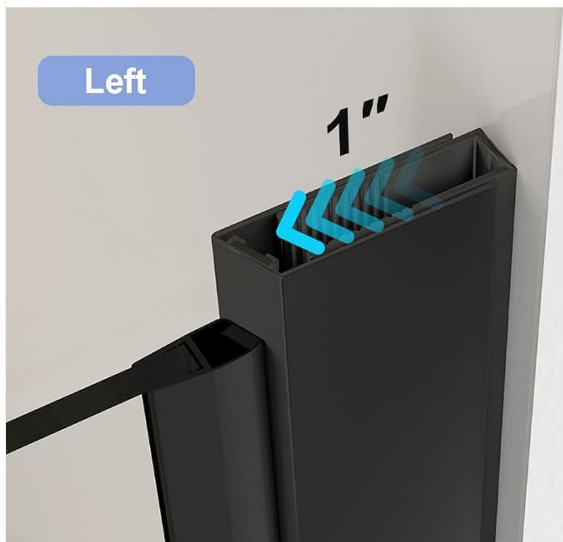


Image: Illustration of the 1-inch width adjustment capability on each side of the door.

- 8. Install Handle and Towel Bar:** Attach the interior mini-handle and the exterior 304 stainless steel towel bar to the glass panel.

Laser-Engraved Stainless Steel Handle

Textured for Grip. Designed for Elegance



Image: Laser-engraved stainless steel handle with inner grab handle and towel bar.

9. **Seal with Silicone:** Apply a continuous bead of silicone sealant along the exterior seams where the wall jambs meet the shower wall and along the bottom track to prevent leaks. Allow adequate drying time before use.
10. **Reversible Installation:** The door is designed for reversible installation, allowing it to open from either the left or right side to suit your bathroom layout.

Reversible Installation

Reversible for left or right hand operation



Image: Reversible installation options for left or right-hand operation.

Installation Video Guide:

For a visual guide, please refer to the official installation video below:

Your browser does not support the video tag.

Video: Detailed installation guide for the EASYWORC Pivot Shower Door (Model S9301). This video demonstrates the step-by-step process for securing the frame, installing the pivot mechanism, and attaching the handle.

OPERATING INSTRUCTIONS

The EASYWORC Frameless Pivot Shower Door is designed for smooth and effortless operation.

- **Opening the Door:** Gently pull the handle to open the door. The pivot system allows the door to swing outward smoothly up to 90 degrees. The door lifts slightly during opening to clear the bottom track.
- **Closing the Door:** Push the door gently until it aligns with the wall jamb. The door will lower into position, and the magnetic seal strip will ensure a tight, leak-proof closure.
- **Handle and Towel Bar:** Use the interior mini-handle for easy access from inside the shower. The exterior 304 stainless steel bar serves as a convenient towel rack.

MAINTENANCE

Regular maintenance will keep your EASYWORC shower door looking new and functioning properly.

- **Glass Cleaning:** The tempered glass features an interior nano coating that resists water spots and soap scum. For daily cleaning, wipe the glass with a soft cloth or squeegee after each use. For deeper cleaning, use a mild, non-abrasive glass cleaner. Avoid harsh chemicals or abrasive pads, which can damage the nano coating.



Image: Benefits of nano coating for easy cleaning and resistance to water spots.

- **Frame Cleaning:** Clean the matte black aluminum frame with a soft, damp cloth and mild soap. Do not use abrasive cleaners or solvents, as these can damage the finish.
- **Pivot Mechanism:** Periodically check the pivot mechanism for smooth operation. If it becomes stiff, apply a small amount of silicone-based lubricant to the moving parts.
- **Seals:** Inspect the magnetic seal strips and bottom sweep for wear or damage. Replace them if they are cracked or no longer provide a tight seal to prevent leaks.

TROUBLESHOOTING

This section addresses common issues you might encounter with your shower door.

- **Door does not close tightly:**
 - Check if the magnetic seal strip is clean and free of debris.
 - Ensure the wall jambs are plumb and the door is properly aligned. Adjust the wall jambs if necessary (refer to "Adjust Width" in Setup).
 - Inspect the magnetic seal for damage or wear. If damaged, it may need replacement.
- **Door is stiff or squeaks when opening/closing:**
 - Apply a silicone-based lubricant to the pivot points and hinges.
 - Check for any obstructions in the bottom track.
- **Water leaks from the bottom or sides of the door:**
 - Verify that the silicone sealant applied during installation is intact and free of gaps. Reapply sealant if needed.
 - Ensure the bottom sweep is properly installed and making full contact with the shower base.
 - Check the magnetic seal strip for proper engagement and condition.
- **Glass appears cloudy or stained:**
 - Clean the glass regularly with a mild glass cleaner. The nano coating helps prevent buildup, but hard water can still leave residue if not wiped regularly.
 - Avoid using abrasive cleaners or tools that could damage the nano coating.

SPECIFICATIONS

Feature	Detail
Brand	EASYWORC
Model Number	SDoor-S9301-2672-BK-EW-01
Shower Door Width	24" - 26" W (Adjustable)
Shower Door Height	72" H
Walk-in Width	19 5/8" - 21 5/8"
Glass Thickness	1/4" (6mm)
Glass Type	Tempered Glass with Nano Explosion-Proof Film
Certifications	CPSC, ANSI, SGCC Certified
Frame Material	Aluminum
Finish	Matte Black
Item Weight	48.7 Pounds
Installation Type	Reversible (Left or Right Hand Operation)

Premium Aluminum Alloy

Built to last: rust and moisture resistant

Product Dimension

A 24"-26"

Shower Door Width

B 72"

Shower Door Height

C 19 5/8" -21 5/8"

Walk-in Width

D 1/4"

Glass Thickness

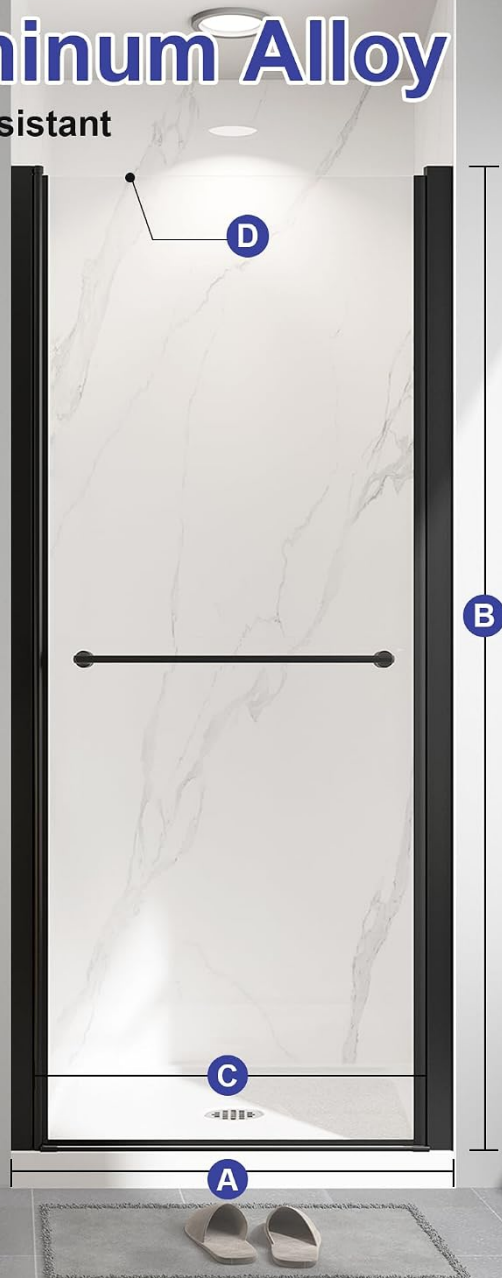


Image: Detailed product dimensions and specifications.

WARRANTY INFORMATION

Specific warranty details are not provided in the product information. Please refer to the product packaging or contact EASYWORC customer support for comprehensive warranty information.

CUSTOMER SUPPORT

If you encounter any issues or have questions regarding your EASYWORC Frameless Pivot Shower Door, please follow these steps for assistance:

1. **Before Purchase:** For inquiries or concerns prior to purchase, contact customer service for installation preparation and product matching assistance.
2. **After Purchase:** Find your shower door order in "Your Orders" and click "Contact Seller". This will allow the seller to view your details and assist you promptly.
3. **Show the Issue:** Provide photos and a detailed description of the problem. Visual aids help customer support

understand and resolve issues faster.

4. **Resolution:** Customer support aims to reply within 24 hours with a solution, often including fast, free replacement of damaged or missing parts. Most cases are resolved within a few days.



Image: EASYWORC Customer Support process and contact information.

Phone Support: 1-888-998-5388 (Monday-Friday, 9 AM - 5 PM PST)

Online Customer Care: 7/24 availability