

[Manuals.plus](#) /

› [HYSEYY](#) /

› HYSEYY HY-1324 Double Rods Rolling Clothes Rack User Manual

HYSEYY HY-1324

HYSEYY HY-1324 Double Rods Rolling Clothes Rack User Manual

Model: HY-1324

INTRODUCTION

Thank you for choosing the HYSEYY HY-1324 Double Rods Rolling Clothes Rack. This portable garment rack is designed to provide efficient and versatile storage for your clothing, featuring a robust carbon steel construction and smooth-rolling wheels for easy mobility. This manual provides essential information for assembly, operation, maintenance, and troubleshooting to ensure optimal use of your product.

SAFETY INFORMATION

- Ensure all components are securely fastened during assembly and before use.
- Do not exceed the maximum load capacity of 108.86 kg (240 lbs) for the entire rack. The top double bars support up to 81.65 kg (180 lbs), and the bottom bar supports up to 27.21 kg (60 lbs).
- Distribute weight evenly across the hanging rods and bottom shelf to maintain stability.
- Engage the wheel brakes when the rack is in a stationary position to prevent unintended movement.
- Keep children and pets away from the rack during assembly and when moving it.
- Avoid placing the rack on uneven surfaces to prevent tipping.

PACKAGE CONTENTS

Please verify that all parts are present before beginning assembly. If any parts are missing or damaged, please contact customer support.

- Top Hanging Rods (2)
- Vertical Support Rods (4)
- Bottom Support Rods (2)
- Side Extension Rods (2)
- Base Frame Components (various)

- Wheels (4, with 2 lockable)
- Assembly Instructions

SETUP AND ASSEMBLY

The HYSEYY HY-1324 Clothes Rack features a snap-together design for quick and easy assembly, typically completed within 8 minutes. No special tools are required.

1. Unpack all components and lay them out on a clean, flat surface.
2. Attach the wheels to the base frame components. Ensure the two lockable wheels are positioned on the same side for easier access.
3. Connect the vertical support rods to the base frame using the snap-on mechanism. Ensure they click into place securely.
4. Insert the bottom support rods between the vertical supports to form the lower shelf.
5. Attach the top hanging rods to the upper ends of the vertical support rods. Note that one rod is typically higher than the other to accommodate varying garment lengths.
6. Slide the side extension rods into their designated slots on the top hanging rods.
7. Gently shake the assembled rack to ensure all connections are firm and stable.

360° Lockable & Durable Wheels

Effortless Moves, Smooth Results!



Silent Rolling



Lockable Wheels



360° Rotation



Figure 1: Quick Assembly Diagram. This image illustrates the snap-on installation method, highlighting how components connect without the need for screws, enabling fast setup.

OPERATING INSTRUCTIONS

Utilizing Storage Capacity

- **Double Rods:** Use the dual hanging rods to organize up to 150 garments. The staggered height design allows for hanging long dresses, pants, and jackets without them dragging on the floor or interfering with the lower rod.
- **Bottom Shelf:** The sturdy bottom bar provides space for shoes, storage bins, or suitcases, helping to keep your area tidy.
- **Side Extensions:** The fixed side extension offers additional hanging points for accessories such as scarves, hats, and umbrellas.

240LBS Load Capacity

Fits the Whole Family's Hanging Needs.



Figure 2: Load Capacity Overview. This image demonstrates the rack's ability to hold a significant number of items, including T-shirts, dresses, jackets, and coats, with a total load capacity of 240 lbs.

Side Rods

Help You Keep Your Scarves
Hats & Umbrellas Organized.

Bottom Shelf

Keep Your Shoes, Storage Boxes
and Suitcases Tidy.

Figure 3: Side Rods and Bottom Shelf. This view highlights the utility of the side rods for organizing scarves and hats, and the bottom shelf for shoes and storage boxes.

Mobility and Stability

The rack is equipped with four high-quality 360° swivel casters, two of which include brakes, allowing for smooth and effortless relocation.

- **Moving the Rack:** To move the rack, ensure the brakes on the two lockable wheels are disengaged. The smooth-rolling wheels allow for easy movement across various floor types, including carpet and hard floors.
- **Securing the Rack:** Once the rack is in the desired position, engage the brakes on the two lockable wheels to prevent any unwanted movement and ensure stability.



Quick Assembly

Snap-on Installation Saves You 80% of Assembly Time.


Ours



Snap-on Installation

Tool-Free Installation for Convenience and Speed.

Others

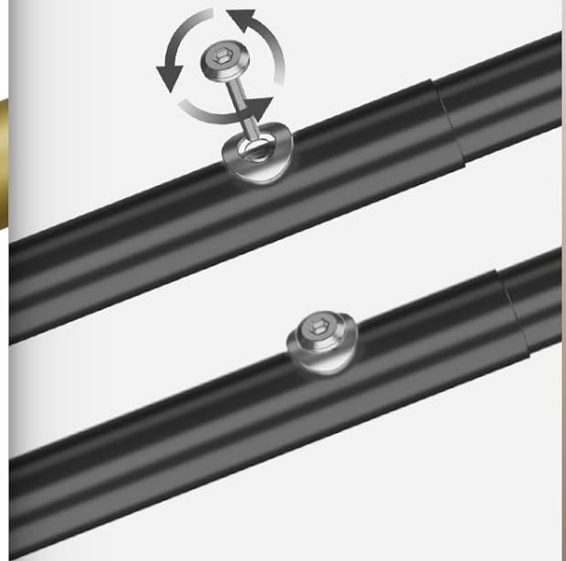

Screw Mounting

Difficult to Assemble Time-consuming.

Figure 4: 360° Lockable Wheels. This image details the design of the durable wheels, featuring 360° rotation and a locking mechanism for secure placement.

MAINTENANCE

- **Cleaning:** Wipe the carbon steel frame with a soft, damp cloth. Avoid using abrasive cleaners or harsh chemicals that could damage the finish.
- **Inspection:** Periodically check all connections to ensure they remain tight and secure. Re-snap any loose connections if necessary.
- **Wheel Care:** Keep the wheels free of dust and debris to ensure smooth operation. If wheels become stiff, clean them and apply a small amount of silicone lubricant if needed.
- **Storage:** If disassembling for storage, ensure all parts are clean and dry. Store in a cool, dry place.

TROUBLESHOOTING

- **Rack is wobbly:**
 - Ensure all snap-on connections are fully engaged.
 - Verify that the rack is placed on a flat, level surface.
 - Check that weight is distributed evenly across the rods and shelf.
- **Wheels are not rolling smoothly:**
 - Check for debris (hair, lint) caught in the wheel casters and remove it.
 - Ensure the wheel brakes are disengaged.
- **Wheels are not locking:**
 - Ensure the locking mechanism is fully engaged by pressing down firmly.
 - Verify that the lockable wheels are correctly installed.
- **Difficulty assembling parts:**
 - Refer to the assembly instructions and diagrams carefully.
 - Ensure components are oriented correctly before attempting to snap them together.
 - Apply gentle, even pressure. Do not force parts.

SPECIFICATIONS

Brand:	HYSEYY
Model Number:	HY-1324
Material:	Carbon Steel
Color:	Glod
Product Dimensions (L x W x H):	99.1 cm x 41.9 cm x 153 cm (39 in x 16.5 in x 60.23 in)
Total Load Capacity:	108.86 kg (240 lbs)
Top Rods Load Capacity:	81.65 kg (180 lbs)
Bottom Shelf Load Capacity:	27.21 kg (60 lbs)
Installation Type:	Free Standing
Special Feature:	Collapsible
Wheels:	4 (2 with brakes, 360° swivel)

Product Dimension

Space-Saving Design for Perfect Organization.



Figure 5: Product Dimensions. This diagram provides a visual representation of the rack's measurements, including height, width, and depth.

CUSTOMER SUPPORT

Our dedicated support team is available 24/7 to assist with any questions or concerns you may have. If you encounter any issues before or after your purchase, please do not hesitate to contact us. We aim to respond to all inquiries within 24 hours to ensure your complete satisfaction.

For support, please refer to the contact information provided with your purchase or visit the official HYSEYY website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0GFW8KHYW>

More documents and user manuals: **<https://manuals.plus/>**