

VEGER V0556P

VEGER Mini Portable Charger User Manual

Model: V0556P | Brand: VEGER

INTRODUCTION

The VEGER Mini Portable Charger is a compact and efficient power bank designed for iPhone and AirPods users. With a 5000mAh capacity and 20W PD fast charging, it provides a convenient, cordless solution for on-the-go power needs. Its ultra-small and lightweight design makes it an ideal emergency backup charger.



Image: The VEGER Mini Portable Charger, a compact black device, shown connected to the bottom of an iPhone, illustrating its direct plug-in design.

KEY FEATURES

- **Wide Compatibility:** Designed for iPhone 14 series, iPhone 13, 12, 11, XR, 8, 7, X, XS Max, Pro Max, SE, 6s, and AirPods/AirPods Pro.
- **Fast Charging & Recharging:** Supports 20W Power Delivery (PD) output for quick charging iPhone 8 and newer models. USB-C input supports QC 2.0/3.0, FCP, AFC protocols (5V-2.0A, 9V-2.0A) for rapid recharging of the power bank in approximately 1.5 hours.
- **Cordless & Portable Design:** Ultra-small dimensions (77.2*35.0*24.7mm / 3.03"x1.38"x0.97") and

lightweight (0.2lb) eliminate the need for cables, offering maximum portability.

- **Pass-Through Charging:** Allows simultaneous charging of the power bank and a connected iPhone.
- **Trickle-Charging Mode:** Provides optimized charging for low-power devices like AirPods and AirPods Pro. Refer to the manual for activation.
- **5000mAh Capacity:** Offers approximately 0.8 to 1.5 full charges for an iPhone, serving as a reliable emergency backup.

Designed For iPhone



All Series

14/13/12/11/X/XR/
8/7/6/SE/Airpods

Image: The VEGER Mini Portable Charger shown alongside multiple iPhone models, indicating its broad compatibility across different iPhone series and AirPods.

Before first use, it is recommended to fully charge your VEGER Mini Portable Charger.

1. **Charging the Power Bank:** Connect a USB-C charging cable (not included) to the USB-C input port on the power bank. Connect the other end of the cable to a compatible power adapter (e.g., 9V-2A Quick Charger for fastest results).
2. The LED indicator lights on the power bank will illuminate to show the charging progress. Four solid lights indicate a full charge.

Fast Recharge

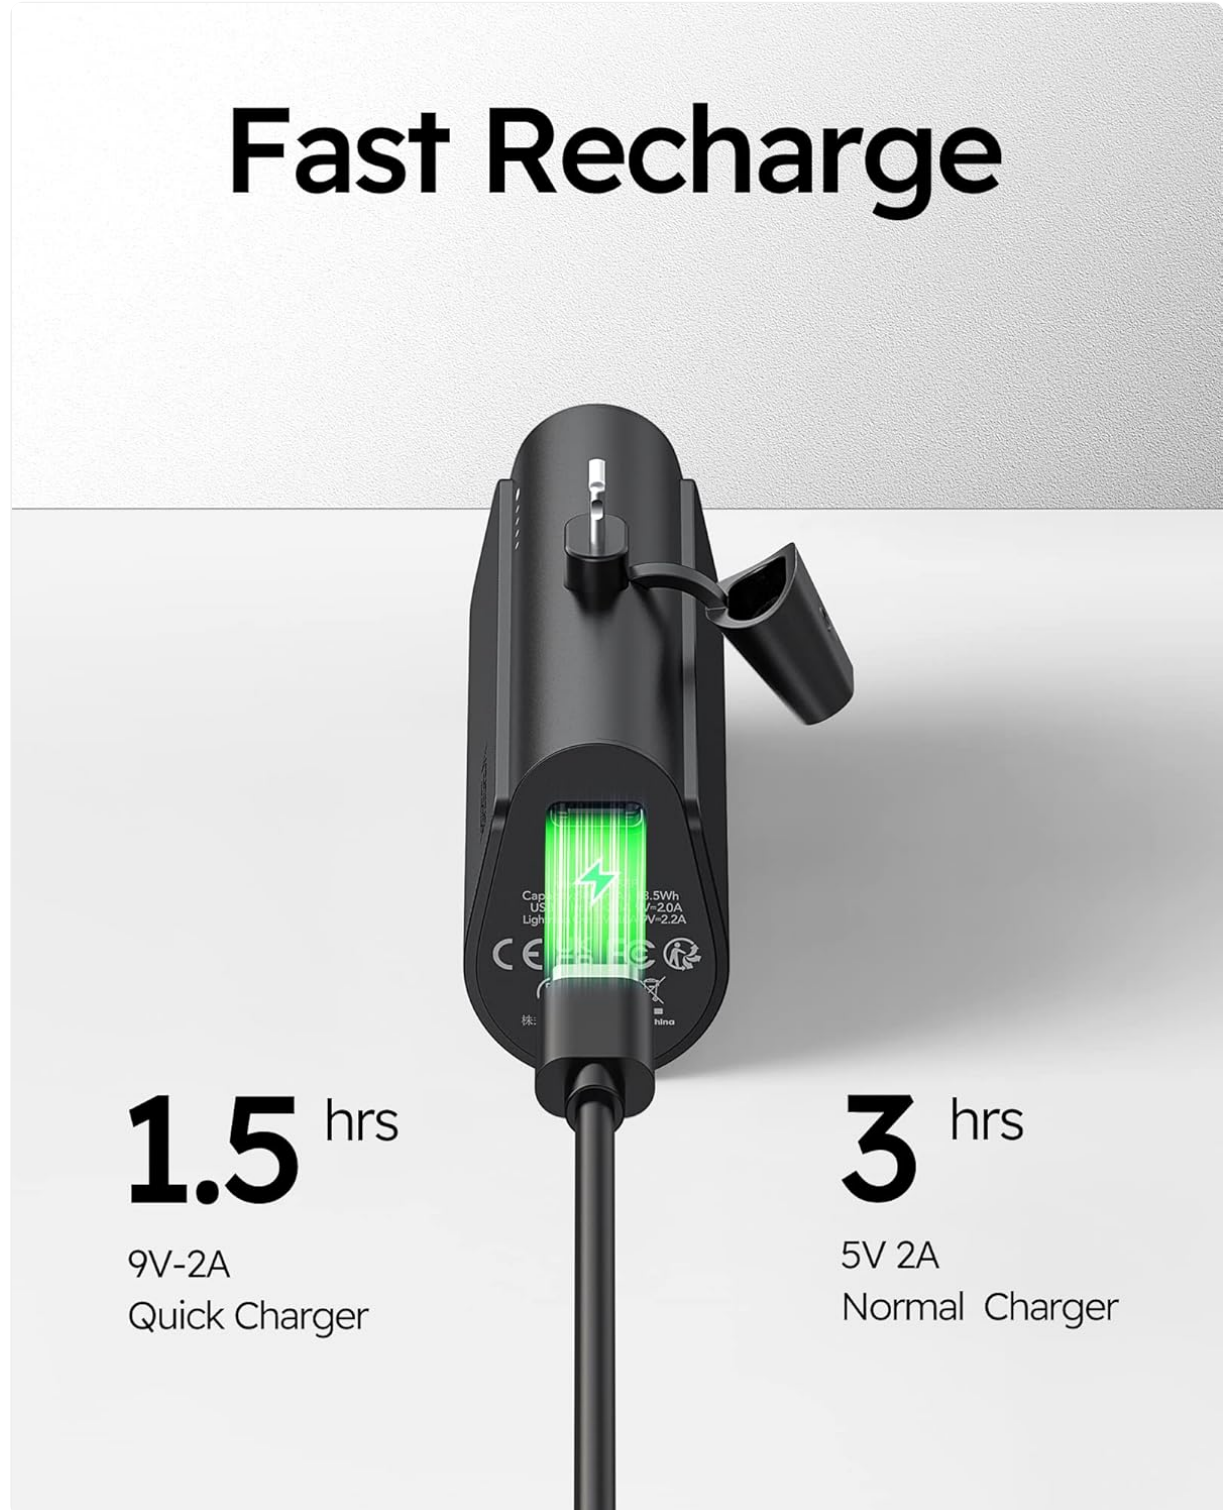


Image: The VEGER Mini Portable Charger connected to a wall adapter via a USB-C cable, demonstrating the recharging process. The image highlights fast recharge times.

1. Charging Your iPhone:

- Remove the protective cap from the Lightning connector on the power bank.
- Directly plug the Lightning connector into your iPhone's charging port.
- Press the power button on the side of the power bank once to begin charging. The LED indicators will show the remaining battery level.
- To stop charging, simply unplug the power bank from your iPhone.

2. Pass-Through Charging:

- While your iPhone is connected to the power bank and charging, you can also recharge the power bank simultaneously.
- Connect a USB-C charging cable to the power bank's input port and a power adapter. Both devices will charge.

3. Trickle-Charging Mode (for AirPods/low-power devices):

- To activate trickle-charging mode for devices like AirPods, press and hold the power button for approximately 3 seconds until the first LED indicator light blinks slowly.
- Connect your AirPods (or other low-power device) to the Lightning connector.
- To exit trickle-charging mode, press the power button once.

Pass-through Charging

when recharging powerbank,
meanwhile charging your phone

Output
iOS 20W

Input:
Type-C 18W



Note:
USB C input only, charger not included

Image: The VEGER Mini Portable Charger plugged into an iPhone, which is then connected to a wall charger via a USB-C cable, illustrating the pass-through charging capability.

MAINTENANCE

- Keep the power bank away from extreme temperatures, direct sunlight, and moisture.
- Clean the device with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Store in a cool, dry place when not in use.
- Avoid dropping or subjecting the device to strong impacts.

TROUBLESHOOTING

Issue	Possible Cause / Solution
Power bank not charging / not turning on.	Ensure the power bank is fully charged. Check the USB-C cable and power adapter for damage or proper connection. Try a different cable or adapter.
iPhone not charging from power bank.	Ensure the Lightning connector is fully inserted into the iPhone. Press the power button on the power bank to initiate charging. Check if the iPhone's charging port is clean and free of debris.
Slow charging speed.	Ensure you are using a 20W PD compatible cable and adapter for optimal fast charging. Older iPhone models will charge at 5V normal speed.
Power bank gets hot during charging/discharging.	It is normal for power banks to generate some heat during operation. If it becomes excessively hot or emits smoke/odor, discontinue use immediately and contact customer support.
Trickle-charging mode not working.	Ensure you are pressing and holding the power button for approximately 3 seconds to activate the mode (first LED blinks slowly).

SPECIFICATIONS

- **Model Number:** V0556P
- **Battery Capacity:** 5000mAh (3.7V Lithium Polymer)
- **Input:** USB Type-C (QC 2.0/3.0, FCP, AFC compatible; 5V-2.0A, 9V-2.0A)
- **Output:** Lightning Connector (20W PD for compatible iPhones; 5V normal charging for others)
- **Product Dimensions:** 77.2 x 35.0 x 24.7 mm (3.03 x 1.38 x 0.97 inches)
- **Item Weight:** 3.2 ounces
- **Special Feature:** Built-in Lightning Cable
- **Manufacturer:** Dong guan Utopia-Originality Technology Co., Ltd

WARRANTY & SUPPORT

For warranty information and customer support, please refer to the official VEGER website or contact the seller directly. Keep your purchase receipt for any warranty claims.