

[Manuals.plus](#) /

› [Kviflon](#) /

› Kviflon 40-inch Flat Ceiling Fan with LED Light, Model 8969 User Manual

Kviflon 8969

Kviflon 40-inch Flat Ceiling Fan with LED Light

MODEL: 8969

1. Important Safety Information

Please read this entire manual carefully before attempting to assemble, install, operate, or maintain this product. Failure to follow these instructions could result in electric shock, fire, or serious personal injury.

- **Electrical Safety:** All electrical wiring must be performed by a qualified electrician and conform to all local and national electrical codes. Disconnect power at the main circuit breaker before installation or servicing.
- **Mounting:** Ensure the mounting structure can support the weight of the fan (approximately 4.06 kg or 8.95 lbs) and any additional stress from fan operation.
- **Blade Clearance:** Maintain a minimum clearance of 2.3 meters (7.5 feet) from the floor to the fan blades and 0.6 meters (2 feet) from the wall to the blade tips.
- **Indoor Use:** This fan is designed for indoor use only. Do not install in damp locations or outdoors where it may be exposed to direct rain or excessive moisture.
- **Remote Control:** Keep the remote control out of reach of children.

2. Package Contents

Verify that all components are present before beginning installation. If any parts are missing or damaged, contact Kviflon customer support.

- Ceiling Fan Unit (Motor Housing, Blades, LED Light Kit)
- Remote Control
- Remote Control Wall Holder
- Mounting Bracket and Hardware
- Instruction Manual

Lumière LED avec abat-jour en acrylique

Expérience d'éclairage plus lumineuse et uniforme



3000K

— Blanc chaud —



4500K

— Blanc naturel —



6000K

— Cool white —

Image: Overview of the Kvikflon ceiling fan components, including the main fan body, five blades, LED light, and the remote control with its wall mount.

3. Setup and Installation

Follow these steps for proper installation. It is recommended to have two people for installation.

1. Prepare for Installation:

- Turn off power at the circuit breaker.
- Ensure the mounting location is secure and can support the fan's weight.

2. Mounting Bracket Installation:

- Secure the mounting bracket to the ceiling junction box using the provided screws and washers.
- This fan supports both flush mount and angle mount installations. Choose the appropriate method for your ceiling type.

40 INCH CEILING FAN

Product dimension



Mounting options



Angle Mount ❌



Flush Mount ✅

Remote control



Fitted Ceiling Height



Space: 100-225 ft*ft;
Ceiling Height: 8-10ft

Image: Illustration of the fan's dimensions and two mounting options: Angle Mount for sloped ceilings and Flush Mount for flat ceilings.

3. Wiring Connections:

- Connect the household supply wires to the fan wires according to local electrical codes (typically black to black, white to white, and ground to ground).
- Ensure all connections are secure and insulated with wire nuts.

4. Attach Fan Body:

- Carefully lift the fan body and attach it to the mounting bracket.
- Secure the fan body with the screws provided.

5. Blade Attachment:

- Attach each fan blade to the motor housing using the screws provided. Ensure they are tightened securely.

6. Light Kit Installation:

- Connect the LED light kit wires to the corresponding wires in the fan body.
- Secure the light kit to the fan body.

7. Restore Power:

- Once installation is complete, restore power at the main circuit breaker.

4. Operating Instructions

Your Kviflon ceiling fan is controlled by the included remote control. Ensure the remote has batteries installed (not included, typically 2x AAA).

4.1 Remote Control Functions



Image: Multifunctional remote control with labeled buttons for various fan and light settings.

- **1. Fan ON/OFF:** Press to turn the fan on or off.
- **2. Light ON/OFF:** Press to turn the LED light on or off.
- **3. Fan Speed (1-6):** Adjusts the fan speed from 1 (lowest) to 6 (highest).
- **4. Fan ON/OFF:** (Duplicate button, functions as Fan ON/OFF)
- **5. Color Temperature -:** Decreases the color temperature (e.g., from Cool White to Natural White).
- **6. Color Temperature +:** Increases the color temperature (e.g., from Warm White to Natural White).
- **7. Brightness -:** Decreases the light brightness (dimming).
- **8. Brightness +:** Increases the light brightness.
- **9. 2H Timer:** Sets the fan to turn off automatically after 2 hours.
- **10. Mute Function:** Mutes the remote control's beeping sounds.
- **11. Forward/Reverse (F/R):** Changes the direction of the fan blades for summer or winter mode.

4.2 Fan Speed and Noise Levels

The fan features a quiet DC motor, operating at less than 30 dB, ensuring a peaceful environment.



FONCTIONNEMENT SILENCIEUX

Pour un environnement de sommeil plus confortable

Ultra Silencieux = 





1-2 VITESSE
FAIBLE
Convient pour le sommeil





3-4 VITESSE
MOYEN
Convient pour la famille





5-6 VITESSE
ELEVÉ
Convient pour l'été

Image: Visual guide to fan speed recommendations: Speeds 1-2 (Low) for sleeping, Speeds 3-4 (Medium) for family activities, and Speeds 5-6 (High) for summer cooling. Highlights ultra-silent operation.

4.3 Reversible DC Motor (Summer/Winter Mode)

The reversible DC motor allows for year-round use, optimizing air circulation for different seasons.



Ventilateur de plafond 102 cm avec lumière

Économie d'énergie, protection des yeux, source lumineuse LED


Télécommande


Moteur silencieux


Multifonction


6 vitesses


Haute luminosité



Minuterie régulière

Image: Illustration of the reversible DC motor function. In summer, blades rotate counter-clockwise to create a cooling downdraft. In winter, blades rotate clockwise to circulate warm air upwards, reducing heating costs.

- **Summer Mode:** Press the F/R button to set the blades to rotate counter-clockwise, creating a downward airflow that produces a cooling effect.
- **Winter Mode:** Press the F/R button to set the blades to rotate clockwise, creating an upward airflow that

circulates warm air trapped near the ceiling, enhancing air circulation and reducing heating costs.

4.4 LED Light Control

The integrated LED light offers adjustable brightness and color temperature.

Remote Control

With Remote Holder for Wall Mounted.

- Fan and lamp can work independently
- Adjustable six speed wind speed
- Dimmable-Warm White/ Daylight
- Timing-2 Hours

All the functions can be controlled by one handy remote.

Image: Examples of the three adjustable color temperatures: 3000K (Warm White), 4000K (Natural White), and 6500K (Cool White).

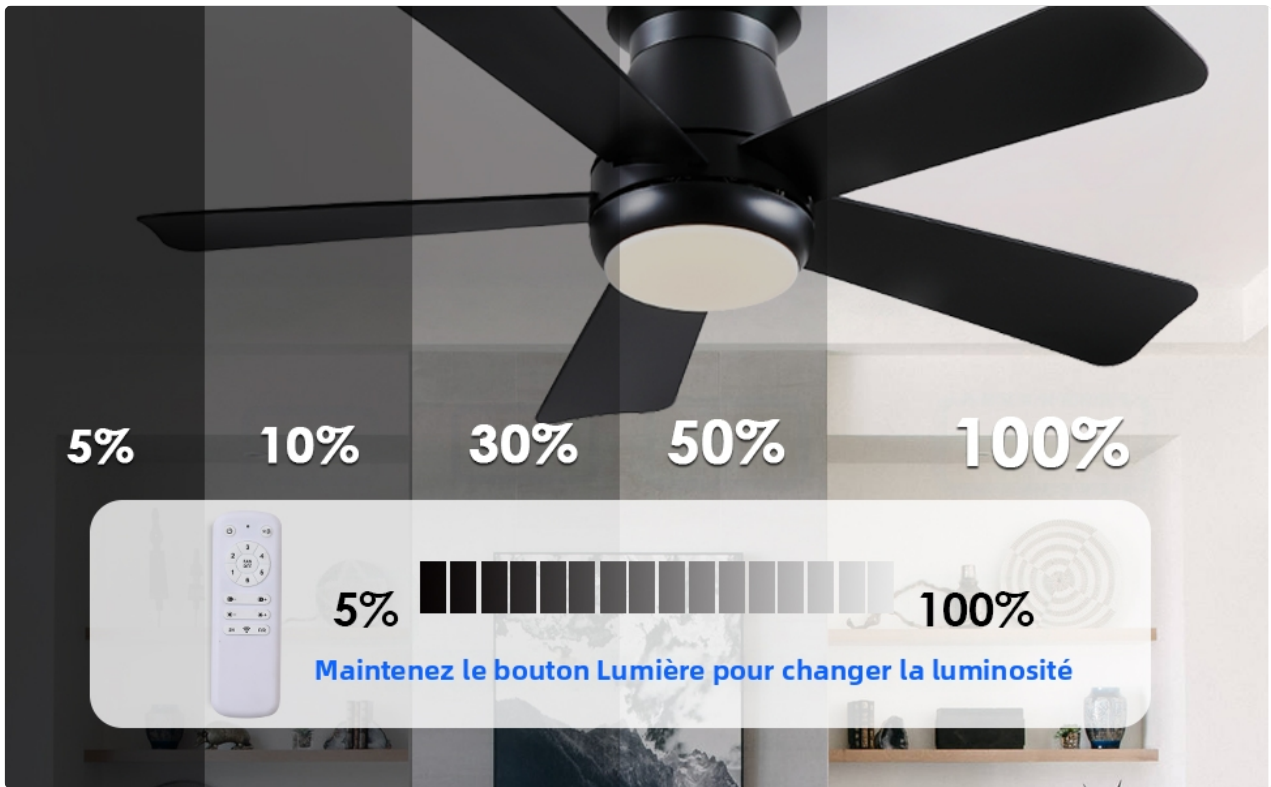


Image: Visual representation of adjustable brightness from 5% (180 Lumens) to 100% (2000 Lumens), controlled by holding the brightness buttons on the remote.

- **Color Temperature:** Cycle through 2700K (Warm White), 4000K (Natural White), and 6000K (Cool White) using the Color Temperature +/- buttons.
- **Brightness Dimming:** Adjust brightness from 5% to 100% using the Brightness +/- buttons. The light output ranges from 180 lumens to 2000 lumens.
- **Light Memory:** The fan's LED light features a memory function that saves the last color temperature and brightness setting when the power is turned off.

5. Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** To clean the fan, wipe the blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents that may damage the finish. Ensure power is off before cleaning.
- **Light Cover:** The LED light cover can be gently removed and cleaned with a soft cloth if necessary.
- **No Lubrication:** The DC motor is permanently lubricated and does not require additional oiling.
- **Tighten Fasteners:** Periodically check all screws and fasteners on the fan body and blades to ensure they are secure.

6. Troubleshooting

If you encounter any issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control not paired or batteries dead.	Check circuit breaker; Verify all wire connections are secure; Replace remote batteries or re-pair remote.
Light does not work	Loose wire connection to light kit; LED driver failure; Remote control issue.	Check light kit wiring; Contact customer support for LED driver replacement; Check remote batteries.
Fan makes excessive noise	Loose fan blades; Loose mounting screws; Fan not balanced.	Ensure all blade screws are tight; Tighten mounting bracket screws; Check for blade balance.
Remote control not responding	Dead batteries; Remote not paired with fan; Obstruction between remote and receiver.	Replace batteries; Follow pairing instructions (if applicable); Ensure clear line of sight.

7. Specifications

Feature	Specification
Model Number	8969
Dimensions (L x W x H)	102 x 102 x 26 cm (40 x 40 x 10.2 inches)
Weight	4.06 kg (8.95 lbs)
Brand	Kviflon
Color	Black
Material	Metal (body), Plastic (blades, lampshade)
Style	Modern
Room Type	Living Room, Bedroom
Power Source	Corded Electric
Installation Type	Flush Mount
Control Method	Remote Control
Bulb Type	LED
Number of Bulbs	1 (integrated LED panel)
Voltage	220 Volts

Feature	Specification
Light Color	Adjustable (2700K Warm White to 6000K Cool White)
Wattage (Light)	20 Watts
Wattage (Motor)	75 Watts (DC Motor)
Dimmable	Yes (5% - 100%)
Luminous Efficacy	800 lm (min) - 2000 Lumens (max)
Water Resistance Level	Not Waterproof
Energy Label	F (24 kWh/1000h) (EU EPREL Link)
Certifications	CE Compliant
Assembly Required	Yes

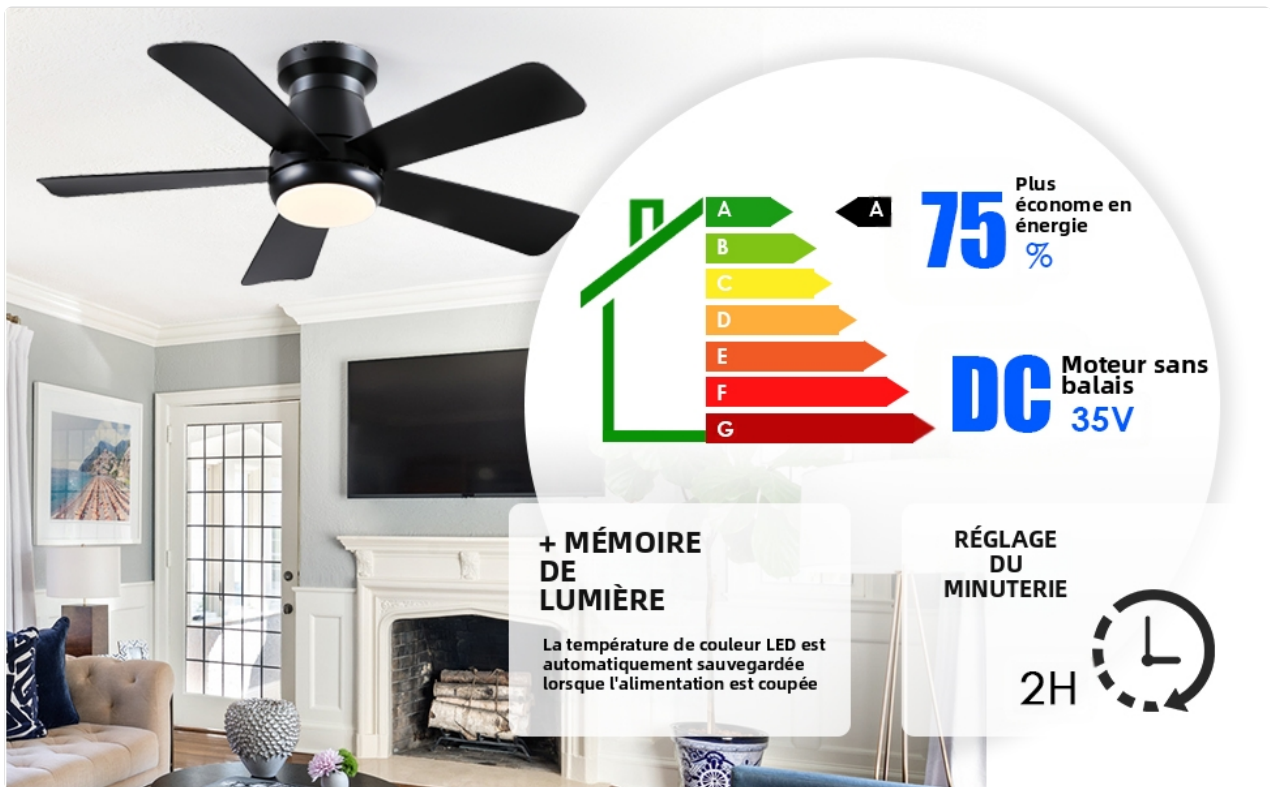


Image: The fan's energy efficiency and DC motor are highlighted, along with light memory and timer functions.

8. Warranty and Support

Kviflon is committed to customer satisfaction.

- **Warranty:** This product comes with a 2-year warranty against factory defects.
- **Spare Parts:** Free replacement parts are provided for factory defects during the warranty period.
- **Customer Support:** For any questions, assistance, or warranty claims, please contact Kviflon customer support. We offer 24/7 support to ensure your needs are met.

