

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [MOUNT PRO](#) /

› [MOUNT PRO Triple Monitor Mount \(Model B0CHF3PC58\) User Manual](#)

MOUNT PRO B0CHF3PC58

MOUNT PRO Triple Monitor Mount User Manual

Model: B0CHF3PC58

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your MOUNT PRO Triple Monitor Mount. Please read this manual thoroughly before installation to ensure correct setup and safe usage. Keep this manual for future reference.

2. SAFETY INFORMATION

Important Safety Instructions:

- Ensure your desk surface is stable and capable of supporting the combined weight of the mount and all monitors.
- Do not exceed the maximum weight capacity of 17.6 lbs (8 kg) per arm.
- Use only the provided hardware. If any parts are missing or damaged, contact MOUNT PRO customer service.
- Improper installation may result in property damage or personal injury.
- Adjust gas spring tension carefully. Refer to the adjustment section for proper procedure.

3. PACKAGE CONTENTS

Verify that all components are present before beginning installation. While a complete list is not provided, typical components include:

- Main Pole and Base (C-Clamp and Grommet options)
- Monitor Arms (Gas Spring Arms)
- VESA Plates
- Cable Management Clips
- Hardware Kit (screws, washers, Allen wrenches)

Wide Compatibility



Screen Size
Max 32"



Load Capacity
Max 17.6lbs



VESA Pattern
75×75mm 100×100mm



Image: Typical package contents for the MOUNT PRO Triple Monitor Mount.

4. SETUP AND INSTALLATION

The MOUNT PRO Triple Monitor Mount offers two installation methods: C-Clamp and Grommet mounting. Choose the method suitable for your desk.

4.1. Choose Mounting Method

Ergonomic Viewing Angle

Swivel: $\pm 90^\circ$



Image: Illustration of C-Clamp and Grommet mounting options.

- **C-Clamp Mounting:** Fits desks with a thickness of 0.39" - 3.15" (10mm - 80mm).
- **Grommet Mounting:** Fits desks with a thickness of 0.39" - 1.97" (10mm - 50mm) and requires an existing hole in the desk.

4.2. Base Assembly (C-Clamp)

1. Attach the L-plate to the bottom of the pole base using the provided screws.
2. Secure the C-clamp to the L-plate.
3. Place the assembled base onto your desk and tighten the C-clamp to secure it firmly.

Your browser does not support the video tag.

Video: Step-by-step guide on how to install the MOUNT PRO Triple Monitor Mount, including base assembly.

4.3. Base Assembly (Grommet)

1. If using grommet mounting, detach the bolt from the C-clamp assembly.
2. Insert the grommet bolt through the desk hole and secure it from underneath with the washer and nut.
3. Attach the pole base to the grommet bolt.

4.4. Pole Installation

1. Connect the upper and lower sections of the pole and secure them with the provided screw.
2. Slide the pole onto the mounted base and tighten the securing screw.

4.5. Arm and VESA Plate Installation

1. Slide the cable clips and fixators onto the pole at desired heights.
2. Attach the monitor arms to the pole, securing them with the fixators.
3. Attach the VESA plates to the back of your monitors using the appropriate screws. Ensure the screws are tightened securely.



4.6. Attaching Monitors

1. Carefully slide each monitor (with VESA plate attached) onto the head of its respective arm.
2. Secure the monitor to the arm by tightening the locking screw on the VESA head.

5. OPERATING AND ADJUSTMENTS

The MOUNT PRO Triple Monitor Mount offers extensive adjustability for optimal viewing comfort.

5.1. Gas Spring Tension Adjustment

The gas spring arms allow for smooth height adjustments. Adjust the tension based on your monitor's weight.

- If the monitor **raises up**, turn the tension screw counter-clockwise ("-" direction) to reduce tension for a lighter monitor.
- If the monitor **falls down**, turn the tension screw clockwise ("+" direction) to increase tension for a heavier monitor.
- Keep the arm in a horizontal position during adjustment.

Ergonomic Viewing Angle



Image: Instructions for adjusting gas spring tension.

5.2. Tilt, Swivel, and Rotation

- **Tilt:** Adjust your screen from +90° to -90° for vertical angle. Loosen the tilting bolt, adjust, then retighten.
- **Swivel:** Swivel the monitor 180° for horizontal angle adjustment.
- **Rotation:** Rotate the monitor 360° to switch between landscape and portrait orientations.

Two Types of Installation



Clamp Mounting

Desk Thickness:
0.39"-3.15"



Grommet Mounting

Desk Thickness:
0.39"-1.97"

Image: Visual representation of tilt, swivel, and rotation adjustments.

Your browser does not support the video tag.

Video: Demonstration of the MOUNT PRO Triple Monitor Mount's full motion capabilities.

5.3. Cable Management

Utilize the integrated cable management system to keep your workspace tidy.

1. Route monitor cables through the cable clips on the arms and along the main pole.
2. Secure the cable covers on the arms to conceal the cables.

6. MAINTENANCE

Regular maintenance ensures the longevity and safe operation of your monitor mount.

- **Cleaning:** Wipe the mount with a soft, damp cloth. Avoid abrasive cleaners.
- **Periodic Checks:** Periodically check all screws and connections to ensure they are tight and secure. Re-tighten if

necessary.

- **Gas Spring:** If monitors feel loose or too stiff, re-adjust the gas spring tension as described in Section 5.1.

7. TROUBLESHOOTING

If you encounter issues, refer to the following common problems and solutions:

- **Monitor sags or does not hold position:**

- The gas spring tension may be too low for the monitor's weight. Increase tension by turning the screw clockwise ("+" direction).
- Ensure all VESA plate screws and arm connections are securely tightened.

- **Monitor is too stiff to move:**

- The gas spring tension may be too high. Decrease tension by turning the screw counter-clockwise ("-" direction).

- **Mount feels unstable:**

- Ensure the C-clamp or grommet base is securely fastened to the desk.
- Verify that the main pole is firmly attached to the base.
- Check that the combined weight of your monitors does not exceed the mount's capacity.



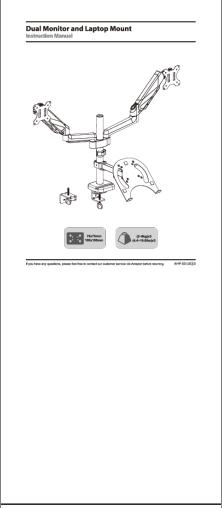

8. SPECIFICATIONS


Feature	Specification
Brand	MOUNT PRO
Model	B0CHF3PC58
Screen Size Compatibility	Max 32" (not compatible with 1000R curved screens)
Weight Capacity per Arm	Up to 17.6 lbs (8 kg)
VESA Compatibility	75x75mm, 100x100mm
Mounting Type	C-Clamp (0.39"-3.15" desk thickness), Grommet (0.39"-1.97" desk thickness)
Movement Type	Rotate, Swivel, Tilt, Articulating
Maximum Arm Height	36.3 inches (from desk surface)
Arm Extension	Up to 18.1 inches
Material	Aluminum
Color	Black

9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the MOUNT PRO official website or contact their customer service directly. Keep your purchase receipt for warranty claims.

Related Documents - B0CHF3PC58

	<p>Premium Single Monitor Stand Instruction Manual Comprehensive instruction manual for the MOUNT PRO Premium Single Monitor Stand, detailing assembly steps, VESA mounting options, gas spring tension adjustment, cable management, and safety guidelines for monitors up to 33 lbs.</p>
	<p>Triple Monitor Desk Mount Instruction Manual - MOUNT PRO Comprehensive instruction manual for the MOUNT PRO Triple Monitor Desk Mount (Model PR1003-1), detailing assembly, installation, and adjustment for up to three monitors. Includes safety precautions, package contents, step-by-step assembly, cable management, and dimension specifications.</p>
	<p>MOUNT PRO Height Adjustable Dual Monitor Desk Mount Installation Guide This manual provides comprehensive, step-by-step instructions for assembling and using the MOUNT PRO Height Adjustable Dual Monitor Desk Mount. It covers clamp and grommet base installation, monitor attachment, tension adjustment, cable management, and product dimensions for dual monitors up to 32 inches.</p>
	<p>MOUNT PRO Monitor and Laptop Mount - Gas Spring Dual Arm User Manual User manual for the MOUNT PRO Monitor and Laptop Mount, a gas spring dual monitor arm supporting two screens up to 27 inches and a laptop tray for notebooks up to 17 inches. Includes assembly instructions and product details.</p>
	<p>Single Monitor Wall Mount Installation Instructions Comprehensive guide for installing a single monitor wall mount with a gas spring arm, covering VESA plate attachment, wall mounting options for wood studs and concrete, monitor hanging, adjustments, and cable management.</p>



[Dual Monitor and Laptop Mount Instruction Manual - MOUNT PRO](#)

Comprehensive Instruction manual for the MOUNT PRO Dual Monitor and Laptop Mount (Model AHP-53-US1.0), detailing assembly, installation, and adjustment steps for optimal use.